

ws2022_exam

Student Group

| First Name | Surname | Matrikel Nr. |
|------------|---------|--------------|
| | | |
| | | |
| | | |

Table of Contents

- Exercise E4 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 3
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 3
- Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 3
- Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 4
- Exercise E6 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 5
- Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 6
- Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 8
- Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 12
- Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) 16
- Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) 17
- Exercise E2 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 19
- Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 19
- Exercise E3 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 20
- Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 20
- Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 20

| | |
|--|----|
| test, WS2022) | 21 |
| Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) | 24 |

Exercise E4 Resistance of a Wire by Resistivity
(written test, approx. 6 % of a 60-minute written test, WS2022)

A heating element made of solid nichrome wire with a diameter of $d = 0.357 \text{ mm}$ is used in an electric power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary. Determine the current I needed to operate it for heating elements. The Nichrome wire has a resistivity of $\rho = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m}$.

The heating element is $l = 3 \text{ m}$ long and has a diameter of $d = 0.357 \text{ mm}$.
 Solution: $R = \rho \cdot \frac{l}{A}$
 ∴ Calculate the resistance R of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}}$$

$$R = \rho \cdot \frac{l}{A} \quad | \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \quad \parallel \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \parallel \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi}$$

Exercise E1 Resistance of a Wire by Resistivity
(written test, approx. 6 % of a 60-minute written test, WS2022)

A heating element made of solid nichrome wire with a diameter of $d = 0.357 \text{ mm}$ is used in an electric power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary. Determine the current I needed to operate it for heating elements. The Nichrome wire has a resistivity of $\rho = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m}$.

The heating element is $l = 3 \text{ m}$ long and has a diameter of $d = 0.357 \text{ mm}$.
 Solution: $R = \rho \cdot \frac{l}{A}$
 ∴ Calculate the resistance R of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}}$$

$$R = \rho \cdot \frac{l}{A} \quad | \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \quad \parallel \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \parallel \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi}$$

Exercise E1 Temperature-dependent Resistance

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. The diagram shows a circuit with a resistor and a diode. The diode has a resistance of $10 \text{ k}\Omega$ and a forward voltage of 0.7 V . The resistor has a resistance of $10 \text{ k}\Omega$. The circuit is connected to a 10 V DC source. Calculate the power dissipated in the resistor.

Its temperature coefficients are: $\alpha = 0.01 \text{ 1/K}$ and $\beta = 71 \cdot 10^{-6} \text{ 1/K}^2$

The temperature inside the refrigeration system can reach down to $-40 \text{ }^\circ\text{C}$.

$$R = 6.5 \text{ k}\Omega$$

The power transfer resistor P is the product of the current and the voltage. Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad | \quad \Delta T = T_{\text{end}} - T_{\text{start}}$$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ 1/K} \cdot (-40 \text{ }^\circ\text{C} - 25 \text{ }^\circ\text{C}) + 71 \cdot 10^{-6} \text{ 1/K}^2 \cdot (-40 \text{ }^\circ\text{C} - 25 \text{ }^\circ\text{C})^2 \right)$$

Exercise E2 Temperature-dependent Resistance

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. The diagram shows a circuit with a resistor and a diode. The diode has a resistance of $10 \text{ k}\Omega$ and a forward voltage of 0.7 V . The resistor has a resistance of $10 \text{ k}\Omega$. The circuit is connected to a 10 V DC source. Calculate the power dissipated in the resistor.

Its temperature coefficients are: $\alpha = 0.01 \text{ 1/K}$ and $\beta = 71 \cdot 10^{-6} \text{ 1/K}^2$

The temperature inside the refrigeration system can reach down to $-40 \text{ }^\circ\text{C}$.

$$R = 6.5 \text{ k}\Omega$$

The power transfer resistor P is the product of the current and the voltage. Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad | \quad \Delta T = T_{\text{end}} - T_{\text{start}}$$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ 1/K} \cdot (-40 \text{ }^\circ\text{C} - 25 \text{ }^\circ\text{C}) + 71 \cdot 10^{-6} \text{ 1/K}^2 \cdot (-40 \text{ }^\circ\text{C} - 25 \text{ }^\circ\text{C})^2 \right)$$

Exercise E6 Pure Resistor Network Simplification
(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 100% of the points. The result is given. R_{eq} .

Solution

$$R_{eq} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.



Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel (R_Y + R_2 + R_4 + R_4) \parallel (R_Y + R_7 + R_7)$$

.. The switch shall now be open. Calculate the equivalent resistance R_{eq} between AS and BS .

Solution

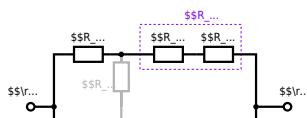

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel (500 \Omega) \parallel (200 \Omega) \parallel (500 \Omega \cdot 200 \Omega) / (500 \Omega + 200 \Omega)$$


Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved with $R_1 = 200 \Omega$, $R_2 = R_3 = 100 \Omega$ and the source $B = 15 \text{ V}$.
 Result given: $R_{\text{eq}} = 132.8 \Omega$.

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

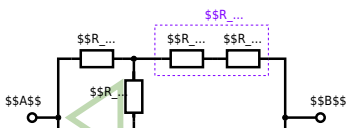


Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:
$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

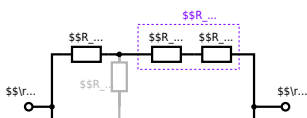


The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \, \Omega + 200 \, \Omega + 200 \, \Omega) \parallel (100 \, \Omega + 100 \, \Omega) \parallel R_{\text{eq}} = (500 \, \Omega) \parallel (200 \, \Omega) \parallel R_{\text{eq}} = \frac{500 \, \Omega \cdot 200 \, \Omega}{500 \, \Omega + 200 \, \Omega}$$

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result


$$U_{\text{s}} = U_{\text{AB}} = 4.5 \, \text{V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \, \Omega$$

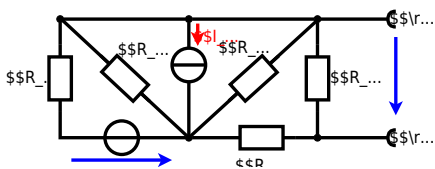

Calculated the internal resistance R_{int} and the source voltage U_{oc} of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \text{ } \Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \text{ } \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \text{ } \Omega$, $R_6=7.5 \text{ } \Omega$, $R_7=15 \text{ } \Omega$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

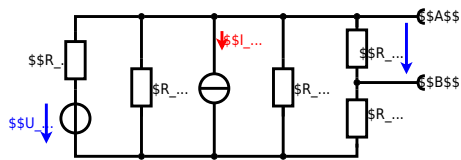

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :



Now a lot of them can be combined. The resistors R_1, R_3, R_5 are in parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24}$$

$$U_{24} = R_{135} \cdot I_{24} \quad \&= \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{\text{AB}} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \quad \&= \left(\frac{U_2}{R_1} - I_4 \right) \cdot \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{\text{AB}} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$


with $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$:

$$U_{\text{AB}} = \frac{6.0\text{V}}{5.0\Omega} - 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \quad \& R_{\text{AB}} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result

$$U_s = U_{\text{AB}} = 4.5\text{V} \quad R_i = R_{\text{AB}} = 6\Omega$$

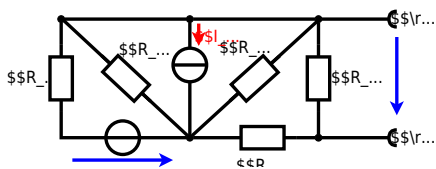


Calculate the internal resistance R_{int} and the source voltage U_{oc} of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \text{ } \Omega$, $U_2=6.0 \text{ V}$, $R_3=10 \text{ } \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \text{ } \Omega$, $R_6=7.5 \text{ } \Omega$, $R_7=15 \text{ } \Omega$. Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

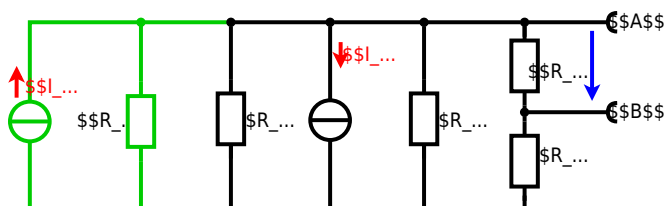

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24} = I_{24} \cdot R_{67}$$

$$I_4 = R_{135} \cdot I_{24} \quad \&= \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left\{ \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \right\} \quad \&= \left(\frac{U_2}{R_1} - I_4 \right) \cdot \left\{ \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \right\}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with $R_1 \parallel R_3 \parallel R_5 = 5 \Omega \parallel 10 \Omega \parallel 10 \Omega = 5 \Omega \parallel 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \left(\frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot \left\{ \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right\} \quad R_{AB} = 15 \Omega \parallel (7.5 \Omega + 2.5 \Omega)$$

Exercise E5 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit below is a RC circuit consisting of a DC voltage source U , a resistor R_1 , a resistor R_2 , and a capacitor C . The switch S_1 is initially open. The voltage across the capacitor is again 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Result: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution: The ideal voltage source U_{eq} is given by $U_{eq} = \frac{U \cdot R_2}{R_1 + R_2}$ and the internal resistance $R_{eq} = R_1 \parallel R_2$.

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .



The circuit contains a voltage source $U=12\text{ V}$, a switch S_1 , a resistor of $R_1=20\text{ }\Omega$ and a capacitor of $C=100\text{ }\mu\text{F}$. The switch S_2 to an additional consumer R_2 will be considered to be open for the first task. At the moment $t_0=0\text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0)=0\text{ V}$.



First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_c(t_1)=0.5 \cdot U$.

Solution



So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1)=0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$. An equivalent linear voltage source can be given with U_s , R_1 and R_B as seen in yellow:

$$t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) \implies t = R_1 \cdot C \cdot \ln(0.5)$$

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($r=0\text{ }\Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10\text{ }\Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1\text{ ms}/(10\text{ }\Omega \cdot 100\text{ }\mu\text{F})})$$

Exercise E4 Charging Capacitors
 (written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (as shown in the solution) consists of a 12 V DC voltage source, a $20\text{ }\Omega$ resistor, a $100\text{ }\mu\text{F}$ capacitor, a $20\text{ }\Omega$ resistor, and a light bulb ($20\text{ }\Omega$). The voltage across the capacitor is again 0 V at the moment $t_0=0\text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2=1\text{ ms}$ after closing the switch.

Solution To solve this, first create an equivalent linear voltage source from U , R_1 , and R_B .

$$U_s = U \cdot \frac{R_B}{R_1 + R_B} = 6\text{ V}$$

$$R_i = R_1 \parallel R_B = 10\text{ }\Omega$$

Solution

The ideal voltage source is $U = 12 \text{ V}$. The internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .



The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ }\Omega$ and a capacitor of $C = 100 \text{ }\mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

First do not consider the light bulb - it is not connected to the RC circuit.

Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.



Solution

An equivalent linear voltage source can be given with U , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($R = 0 \text{ }\Omega$, short-circuit). $R_i = R_1 \parallel R_B = 10 \text{ }\Omega$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t_2/(10 \text{ }\Omega \cdot 100 \text{ }\mu\text{F})})$$

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$: $u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$. It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$

Exercise E2 Analyzing complex Impedances
 (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Given that the phasor voltage source $\underline{U}_s = 50 \angle 0^\circ \text{ V}$ and the admittance $\underline{Y} = 0.24 \text{ S}$ are both in the real domain. ($\$R\$$ and $\$X_1\$$) shall be given.

After analysis, the full width dimensioned complex impedance \underline{Z} shall be extracted and given in phasor form $\underline{Z} = |Z| \angle \varphi$.

Solution
 .. Calculation of physical values of the two components.
 Solution $\underline{R} = \frac{1}{0.24} = 4.17 \text{ } \Omega$ and $\underline{X}_1 = 0 \text{ } \Omega$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \text{and} \quad \underline{U} = \underline{I} \underline{Z}$$
 The current \underline{I} and voltage \underline{U} are in phase since \underline{Z} is purely real.
 resulting $\underline{I} = 0.24 \underline{U} = 0.24 \cdot 50 \angle 0^\circ = 12 \angle 0^\circ \text{ A}$
 Therefore, the component \underline{R} is in phase with the source voltage \underline{U} .
 Impedance $\underline{Z} = \frac{\underline{U}}{\underline{I}} = \frac{50 \angle 0^\circ}{12 \angle 0^\circ} = 4.17 \angle 0^\circ \text{ } \Omega$

$$\underline{Z} = R + jX = 4.17 + j0 \text{ } \Omega$$

 The phase φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{0}{4.17}\right) = 0^\circ$
 With the complex part $\underline{Z} = 4.17 \text{ } \Omega$ and $\underline{U} = 50 \angle 0^\circ \text{ V}$

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{4.17} = 12 \angle 0^\circ \text{ A}$$

 The phase φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(\underline{I})}{\text{Re}(\underline{I})}\right) = \arctan\left(\frac{0}{12}\right) = 0^\circ$

Exercise E5 Analyzing complex Impedances
 (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Given that the phasor voltage source $\underline{U}_s = 50 \angle 0^\circ \text{ V}$ and the admittance $\underline{Y} = 0.24 \text{ S}$ are both in the real domain. ($\$R\$$ and $\$X_1\$$) shall be given.

After analysis, the full width dimensioned complex impedance \underline{Z} shall be extracted and given in phasor form $\underline{Z} = |Z| \angle \varphi$.

Solution
 .. Calculation of physical values of the two components.
 Solution $\underline{R} = \frac{1}{0.24} = 4.17 \text{ } \Omega$ and $\underline{X}_1 = 0 \text{ } \Omega$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \text{and} \quad \underline{U} = \underline{I} \underline{Z}$$
 The current \underline{I} and voltage \underline{U} are in phase since \underline{Z} is purely real.
 resulting $\underline{I} = 0.24 \underline{U} = 0.24 \cdot 50 \angle 0^\circ = 12 \angle 0^\circ \text{ A}$
 Therefore, the component \underline{R} is in phase with the source voltage \underline{U} .
 Impedance $\underline{Z} = \frac{\underline{U}}{\underline{I}} = \frac{50 \angle 0^\circ}{12 \angle 0^\circ} = 4.17 \angle 0^\circ \text{ } \Omega$

$$\underline{Z} = R + jX = 4.17 + j0 \text{ } \Omega$$

 The phase φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{0}{4.17}\right) = 0^\circ$
 With the complex part $\underline{Z} = 4.17 \text{ } \Omega$ and $\underline{U} = 50 \angle 0^\circ \text{ V}$

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{4.17} = 12 \angle 0^\circ \text{ A}$$

 The phase φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(\underline{I})}{\text{Re}(\underline{I})}\right) = \arctan\left(\frac{0}{12}\right) = 0^\circ$

The absolute value of the impedance is $Z = \sqrt{R^2 + (X_L - X_C)^2}$ with $R = 5 \Omega$, $X_L = \omega L = 2\pi \cdot 4 \text{ MHz} \cdot 100 \text{ nH} = 2.51 \text{ m}\Omega$ and $X_C = \frac{1}{\omega C} = \frac{1}{2\pi \cdot 4 \text{ MHz} \cdot 10 \text{ nF}} = 3.98 \text{ m}\Omega$.
 The phase ϕ is given by $\phi = \arctan\left(\frac{X_L - X_C}{R}\right) = \arctan\left(\frac{2.51 - 3.98}{5}\right) = -0.24 \text{ rad}$.
 With the complex part comes the physical value: $I = \frac{U}{Z} = \frac{50 \text{ V}}{\sqrt{5^2 + (2.51 - 3.98)^2}} = 9.9 \text{ A}$.
 The phase ϕ is $\phi = -0.24 \text{ rad} = -13.7^\circ$.

Exercise E3 Impedances at different Frequencies
 (written test, approx. 18 % of a 60-minute written test, WS2022)

At a series circuit with a resistor $R_1 = 1 \text{ k}\Omega$, a capacitor $C_1 = 40 \text{ nF}$ and an inductor $L_1 = 4.7 \text{ }\mu\text{H}$ in AC with a voltage $U = 50 \text{ V}$ and a frequency $f = 450 \text{ kHz}$.
 Result: $Z = 1000 \sqrt{1 + \left(\frac{1}{2\pi \cdot 450000 \cdot 40 \cdot 10^{-9}} - 2\pi \cdot 450000 \cdot 4.7 \cdot 10^{-6}\right)^2} = 1000 \sqrt{1 + (-1.05 - 1.05)^2} = 1483 \Omega$
 A resistor R_2 shall have the same absolute value of the impedance as a capacitor $C_2 = 40 \text{ nF}$ at $f_2 = 4 \text{ MHz}$.

Solution
 Solution: $R_1 = 1.00 \text{ k}\Omega$
 Solution: $R_2 = 10.0 \text{ k}\Omega$

A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $Z = \sqrt{R^2 + X_L^2}$.
 Parallel circuit means that the voltage is the same on R_2 and C_2 .
 $Z = \sqrt{R_2^2 + X_{C2}^2}$ since X_{C2} and R_2 are perpendicular to each other.
 $X_{C2} = \frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} = 0.995 \text{ }\Omega$
 $Z = \sqrt{R_2^2 + 0.995^2}$
 This can be simplified to $R_2 = Z$ (It has to, since R_2 is perpendicular to X_{C2}).
 Therefore, the resulting current of the parallel circuit is given as:
 $I = \frac{U}{Z} = \frac{50 \text{ V}}{1483 \Omega} = 33.7 \text{ mA}$
 Back to the first formula: $R_2 \cdot I = X_{C2} \cdot I$
 $R_2 = X_{C2} = \frac{1}{2\pi \cdot f \cdot C} = \frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} = 0.995 \text{ }\Omega$

Exercise E6 Impedances at different Frequencies
 (written test, approx. 18 % of a 60-minute written test, WS2022)

Resistor values $20 = 450 \text{ kHz}$ $4.7 \text{ } \mu\text{H}$ $30 \text{ } \mu\text{F}$ $330 \text{ } \mu\text{H}$ $10 \text{ } \mu\text{F}$ 10 mA
 Resistor R_1 shall have the same absolute value of the impedance as a capacitor

$C_1 = 40 \text{ nF}$ at $f_1 = 4 \text{ MHz}$.


Solution
 $R_1 = 1.00 \text{ } \Omega$
 $R_2 = 10.0 \text{ } \Omega$


Solution
 A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by
 $Z = R + j\omega L$
 Parallel circuit means that the voltage is the same on R_1 and C_2
 $\frac{1}{Z} = \frac{1}{R_2} + \frac{1}{j\omega C_2}$
 $Z = \frac{R_2 \cdot j\omega C_2}{1 + j\omega R_2 C_2}$
 $Z = \frac{R_2 \cdot j\omega C_2}{1 + j\omega R_2 C_2} \cdot \frac{1 - j\omega R_2 C_2}{1 - j\omega R_2 C_2} = \frac{R_2 \cdot j\omega C_2 (1 - j\omega R_2 C_2)}{1 - (\omega R_2 C_2)^2}$
 $Z = \frac{R_2 \cdot j\omega C_2 - R_2^2 \omega^2 C_2^2}{1 - (\omega R_2 C_2)^2}$
 Therefore, the resulting current of the parallel circuit is given as:
 $I_3 = I_{3R} + I_{3C}$
 $I_3 = \frac{U}{Z} = \frac{U}{R_2 + j\omega L + \frac{R_2 \cdot j\omega C_2 (1 - j\omega R_2 C_2)}{1 - (\omega R_2 C_2)^2}}$
 $I_3 = \frac{U}{R_2 + j\omega L + \frac{R_2 \cdot j\omega C_2 - R_2^2 \omega^2 C_2^2}{1 - (\omega R_2 C_2)^2}}$
 Back to the first formula:
 $R_3 \cdot I_3 = X_{3C} \cdot I_3$
 $R_3 = \frac{X_{3C} \cdot I_3}{I_3} = \frac{X_{3C}}{I_3}$

Exercise E1 Complex Impedance Circuit
 (written test, approx. 15 % of a 60-minute written test, WS2022)

1. Calculate the current $i(t)$ through the resistor R in the circuit shown in the figure.
 The voltage source is $u(t) = 3.0 \text{ V} \cdot \sin(2\pi \cdot 15 \text{ kHz} \cdot t)$
 The circuit consists of a resistor $R = 10 \text{ } \Omega$, an inductor $L = 30 \text{ } \mu\text{H}$, and a capacitor $C = 10 \text{ } \mu\text{F}$.

Solution
 The linear source is connected with an inductor of $30 \text{ } \mu\text{H}$ and a capacitor of $10 \text{ } \mu\text{F}$, all in series.
 Result
 $Z = 10 + j\omega L - j\omega C = 10 + j(2\pi \cdot 15 \cdot 10^{-6}) \cdot 30 \cdot 10^{-6} - j(2\pi \cdot 15 \cdot 10^{-6}) \cdot 10 \cdot 10^{-6}$
 $Z = 10 + j(2.827 \cdot 10^{-6}) - j(9.425 \cdot 10^{-6}) = 10 - j(6.598 \cdot 10^{-6}) \text{ } \Omega$
 $I = \frac{U}{Z} = \frac{3.0 \text{ V}}{10 - j(6.598 \cdot 10^{-6}) \text{ } \Omega} = 0.3 \text{ A} \cdot (1 + j(6.598 \cdot 10^{-6})/10)$
 $i(t) = 0.3 \text{ A} \cdot \sin(2\pi \cdot 15 \text{ kHz} \cdot t + \phi)$
 With $\phi = \arctan\left(\frac{6.598 \cdot 10^{-6}}{10}\right) \approx 3.7 \cdot 10^{-5} \text{ rad}$
 $i(t) = 0.3 \text{ A} \cdot \sin(2\pi \cdot 15 \text{ kHz} \cdot t + 3.7 \cdot 10^{-5} \text{ rad})$
 $Z = R + j\omega L - j\omega C = R + j(\omega L - \omega C)$
 $|Z| = \sqrt{R^2 + (\omega L - \omega C)^2}$

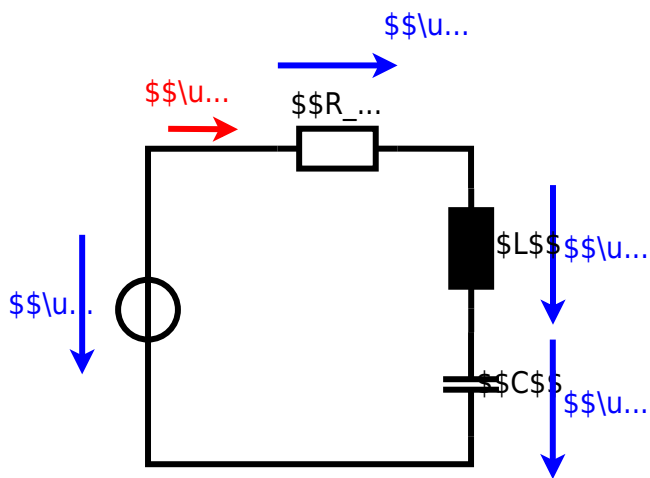

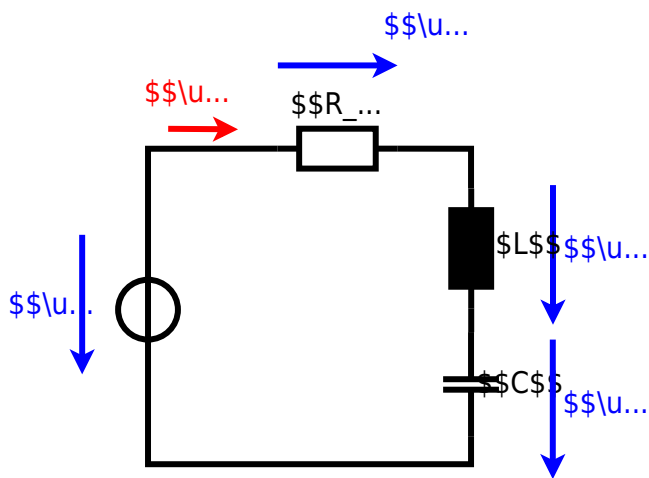

From:

<https://mexle.te.hs-heilbronn.de/> - **MEXLE Wiki**

Permanent link:

https://mexle.te.hs-heilbronn.de/ee1/ws2022_exam

Last update: **2023/04/02 00:45**

