

# Exam Winter Semester 2022

## Student Group

First Name	Surname	Matrikel Nr.

## Table of Contents

- Exam Winter Semester 2022** ..... 3
- Additional permitted Aids ..... 3
- Hits ..... 3
- Tasks ..... 3
- Exercise E4 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute  
            written test, WS2022) ..... 3
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute  
            written test, WS2022) ..... 3
- Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute  
            written test, WS2022) ..... 4
- Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute  
            written test, WS2022) ..... 4
- Exercise E6 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute  
            written test, WS2022) ..... 5
- Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute  
            written test, WS2022) ..... 7
- Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test,  
            WS2022) ..... 9
- Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test,  
            WS2022) ..... 13
- Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,  
            WS2022) ..... 17
- Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,  
            WS2022) ..... 18
- Exercise E2 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute  
            written test, WS2022) ..... 20
- Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute  
            written test, WS2022) ..... 20
- Exercise E3 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute

---

written test, WS2022) .....	21
Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) .....	21
Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) .....	22
Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) .....	25

# Exam Winter Semester 2022

## Additional permitted Aids

- non-programmable calculator,
- formulary (2 DIN A4 pages)

## Hits

- The duration of the exam is 60 min.
- Attempts to cheat will lead to exclusion and failure of the exam.
- Withdrawal is no longer possible after these exam has been handed out.
- Please write down intermediate calculations and results on the assignment sheet. (when more space is needed also on the reverse side. In this case: Mark it clearly).
- Always use units in the calculation.
- Use a document-proof, non-red pen.

## Tasks

### Exercise E4 Resistance of a Wire by Resistivity

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. Heating elements are used to heat the oven with a temperature of  $180^\circ\text{C}$ . The electric power dissipation (= heat flow) of  $P=40\text{ W}$  is necessary.

Calculate the current  $I$  needed to operate for heating elements.

The Nichrome wire has a resistivity of  $1.10 \cdot 10^{-6}\ \Omega\text{ m}$ .

The heating element is  $3\text{ m}$  long and has a diameter of  $3.57\text{ mm}$ .

∴ Calculate the resistance  $R$  of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \\ \sqrt{\frac{P}{R}} &= \sqrt{\frac{40\text{ W}}{0.33\ \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \& \quad | \text{with } A = r^2 \cdot \pi = \\ \frac{1}{4} d^2 \cdot \pi \quad \& \quad R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = \\ 1.10 \cdot 10^{-6}\ \Omega\text{ m} \cdot \frac{4 \cdot 3\text{ m}}{(3.57 \cdot 10^{-3}\text{ m})^2 \cdot \pi} \end{aligned}$$

### Exercise E1 Resistance of a Wire by Resistivity

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. Heating elements are used to heat the oven with a temperature of  $180^\circ\text{C}$ . The electric

**Result** power dissipation (= heat flow) of  $P=40 \text{ W}$  is necessary.  
 Calculate the current  $I$  needed to operate it.  
 The Nichrome wire has a resistivity of  $1.10 \cdot 10^{-6} \text{ } \Omega \text{ m}$ .  
 The heating element is  $3 \text{ m}$  long and has a diameter of  $3.57 \text{ mm}$ .  
**Solution**  $R = \rho \cdot \frac{l}{A} = 10^{-3} \text{ } \Omega$

**Solution**  

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}}$$

$$R = \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \quad || \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad || \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \text{ m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi}$$

**Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)**

**2. Regulation** explains the effect of resistance on refrigeration system. The thermostat has a resistance of  $10 \text{ k}\Omega$  at  $25^\circ\text{C}$ . Its temperature coefficients are:  $\alpha=0.01 \text{ } \frac{1}{\text{K}}$  and  $\beta=71 \cdot 10^{-6} \text{ } \frac{1}{\text{K}^2}$

**Result** The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .  
 Calculate the resistance of the thermostat at  $-40^\circ\text{C}$ .  
 Resistance of the resistor  $R$  depends on the temperature and generates heat. Therefore, a solution is to use a heat pump.  
 Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.  

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad | \quad \Delta T = T_{\text{end}} - T_{\text{start}} \quad || \quad R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right)$$

**Exercise E2 Temperature-dependent Resistance**

**(written test, approx. 6 % of a 60-minute written test, WS2022)**

2. A resistor exhibits a temperature coefficient of resistance of  $\alpha = 0.01 \text{ K}^{-1}$  and a nominal resistance of  $R_0 = 10 \text{ k}\Omega$  at  $T_0 = 25^\circ\text{C}$ . Its temperature coefficients are:  $\alpha = 0.01 \text{ K}^{-1}$  and  $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$ .  
Result: The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

Result: The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

Result: The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

Result: The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

Result: The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

Result: The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .


```
\begin{align*} R &= R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) && | \\ \text{with } \Delta T &= T_{\text{end}} - T_{\text{start}} && \\ R &= 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right) && \\ \end{align*}
```

**Exercise E6 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall hold:  $R_1 = 200 \text{ }\Omega$ ,  $R_2 = R_3 = 100 \text{ }\Omega$ ,  $R_4 = 100 \text{ }\Omega$  and the voltage  $U_B$  is given. Result:  $R_B$ .

```
Solution
\begin{align*} R_{\text{eq}} &= 132.8 \text{ }\Omega && \\ \end{align*}
```

Now a wye-delta transformation is necessary.

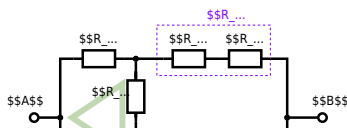


Since  $R_2=R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as: 
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series: 
$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{eq}$  between A and B.

Solution

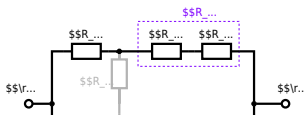

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel (500 \Omega) \parallel (200 \Omega) \parallel (500 \Omega \cdot 200 \Omega) / (500 \Omega + 200 \Omega)$$


**Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall be solved with  $R_1 = 200 \Omega$ ,  $R_2 = R_3 = 100 \Omega$  and the source  $B = 10 \text{ V}$ .  
 Result given:  $R_{\text{eq}} = 132.8 \Omega$ .

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

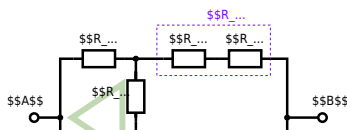


Since  $R_2=R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as: 
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series: 
$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{eq}$  between A and B.

Solution

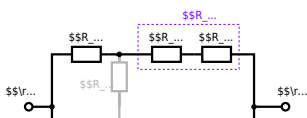


The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

**Exercise E1 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result


$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

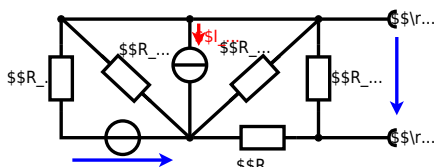


Calculate the internal resistance  $R_{in}$  and the source voltage  $U_{s}$  of an equivalent linear voltage source on the connectors  $A$  and  $B$ .  $R_1=5.0 \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3=10 \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \Omega$ ,  $R_6=7.5 \Omega$ ,  $R_7=15 \Omega$ . Use equivalent sources in order to simplify the circuit!

### Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

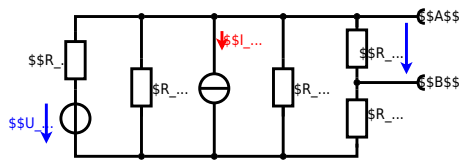

The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

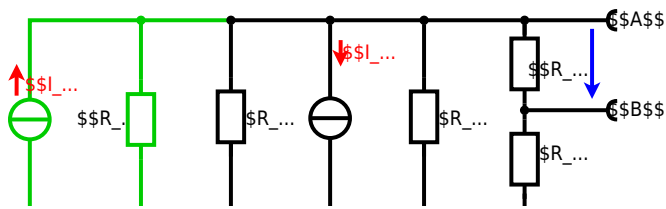

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following:

$$U_{24} = I_{24} \cdot (R_6 || R_7)$$

$$U_{24} = U_2 \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} - I_4 \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} - \left( \frac{U_2}{R_1} - I_4 \right) \cdot \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0\Omega$ , so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$


with  $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$ :

$$U_{AB} = \frac{6.0\text{V}}{5.0\Omega} - 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \parallel R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

### Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.  
Result


$$U_s = U_{AB} = 4.5\text{V} \parallel R_i = R_{AB} = 6\Omega$$

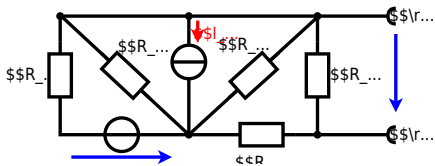


Calculate the internal resistance  $R_{in}$  and the source voltage  $U_{s}$  of an equivalent linear voltage source on the connectors  $A$  and  $B$ .  $R_1=5.0 \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3=10 \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \Omega$ ,  $R_6=7.5 \Omega$ ,  $R_7=15 \Omega$ . Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

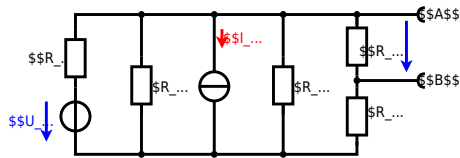

The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

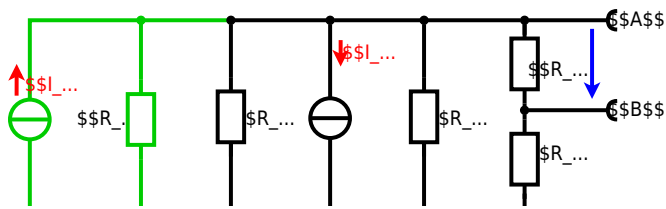

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following:

$$U_{24} = I_{24} \cdot R_{6}$$

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} = (U_2 \cdot \frac{R_1}{R_1 + R_3 || R_5} - I_4 \cdot R_1) \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5}$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} = (U_2 \cdot \frac{R_1}{R_1 + R_3 || R_5} - I_4 \cdot R_1) \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \Omega \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} || R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$


**Exercise E5 Charging Capacitors**  
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit below is a battery with an internal resistance of  $R_1 = 5 \Omega$  and a charging capacitor  $C = 2 \mu\text{F}$  in parallel with a resistor  $R_2 = 2 \Omega$ . The voltage across the capacitor is again  $0 \text{ V}$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.


**Solution:** To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

The ideal voltage source  $U_{eq}$  is given by  $U_{eq} = U \cdot \frac{R_2}{R_1 + R_2} = 12 \text{ V} \cdot \frac{2 \Omega}{5 \Omega + 2 \Omega} = 3.2 \text{ V}$

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .

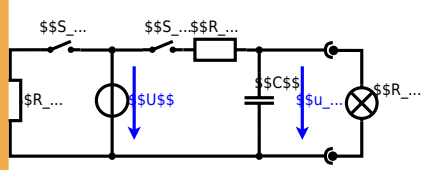


The circuit contains a voltage source  $U=12\text{ V}$ , a switch  $S_1$ , a resistor of  $R_1=20\text{ }\Omega$  and a capacitor of  $C=100\text{ }\mu\text{F}$ . The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first task. At the moment  $t_0=0\text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0)=0\text{ V}$ .

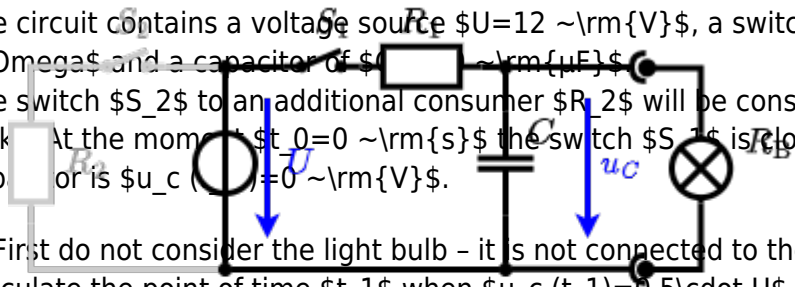

First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time  $t_1$  when  $u_c(t_1)=0.5 \cdot U$ .

Solution

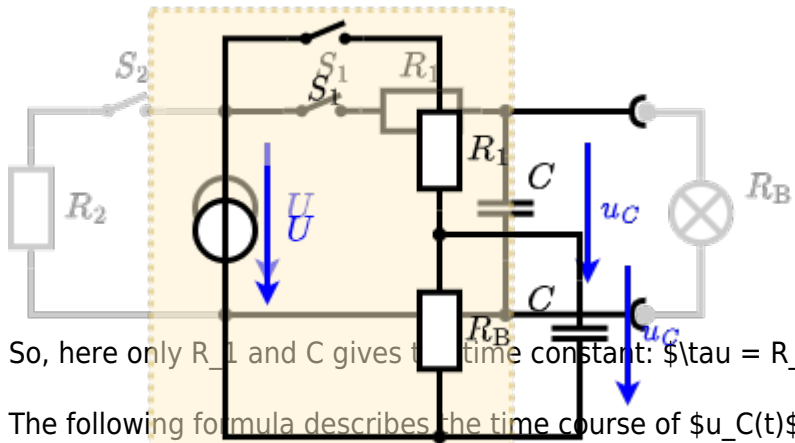

So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_c(t)$  which has to be  $u_c(t_1)=0.5 \cdot U$ :  

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5$   
 An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$ , and  $R_B$  as seen in yellow:  

$$e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) \implies t = R_1 \cdot C \cdot \ln(0.5)$$

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$  The internal resistance is given by substituting the ideal voltage source with its resistance ( $=0\text{ }\Omega$ , short-circuit).  

$$R_i = R_1 \parallel R_B = 10\text{ }\Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1\text{ ms}/(10\text{ }\Omega \cdot 100\text{ }\mu\text{F})})$$

**Exercise E4 Charging Capacitors**  
 (written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (as shown in the solution) consists of a DC voltage source  $U=6\text{ V}$ , a resistor  $R_1=20\text{ }\Omega$ , a capacitor  $C=20\text{ }\mu\text{F}$ , a resistor  $R_2=10\text{ }\Omega$ , and a light bulb  $R_B=10\text{ }\Omega$ . The voltage across the capacitor is again  $0\text{ V}$  at the moment  $t_0=0\text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2=1\text{ ms}$  after closing the switch.

**Solution** To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_B$ .  


$$U_s = U \cdot \frac{R_B}{R_1 + R_B} = 3\text{ V}$$

$$R_i = R_1 \parallel R_B = 13.33\text{ }\Omega$$

Solution

The ideal voltage source is  $U = 12 \text{ V}$ . The internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .


On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .

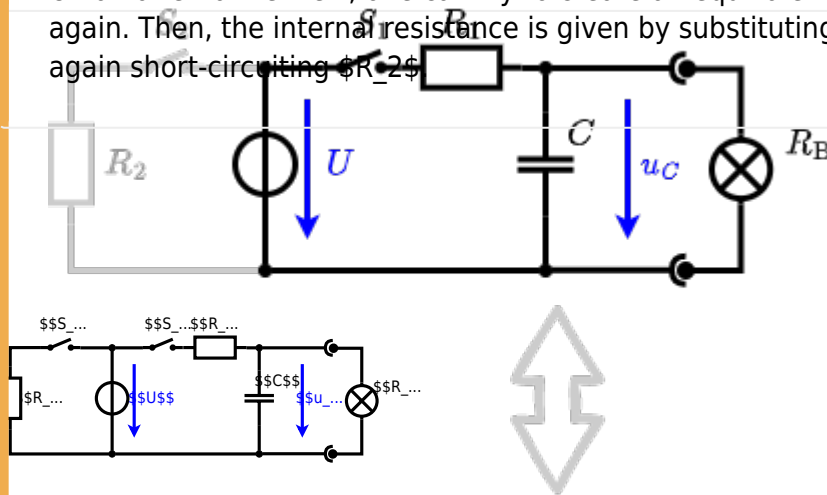

The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ }\Omega$  and a capacitor of  $C = 100 \text{ }\mu\text{F}$ .

The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first asks. At the moment  $t_0 = 0$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0) = 0$ .

First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time  $t_1$  when  $u_c(t_1) = 0.5 \cdot U$ .

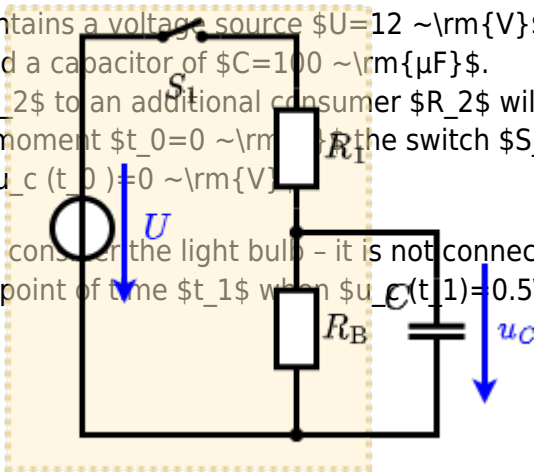

Solution

An equivalent linear voltage source can be given with  $U$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$ . The internal resistance is given by substituting the ideal voltage source with its resistance ( $R = 0 \text{ }\Omega$ , short-circuit).  $R_i = R_1 \parallel R_B = 10 \text{ }\Omega$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t_2/(10 \text{ }\Omega \cdot 100 \text{ }\mu\text{F})})$$

So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_c(t)$  which has to be  $u_c(t_1) = 0.5 \cdot U$ :  $u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$ . It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$

### Exercise E2 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Given that the phasor voltage source  $\underline{U}(t) = 50 \cos(300t) \text{ V}$  and the impedance  $\underline{Z}$  are both in the components. ( $\$R\$$  and  $\$X_L\$$ ) shall be given.

After analysis, the full width dimensioned current  $i(t)$  can be extracted and the phase  $\varphi$  in phase (in  $^\circ$ ) shall be given.  $\underline{Z} = (2 + j4) \Omega$

Solution  
.. Calculation of physical values of the two components.  
Solution 
$$R = 2 \Omega \quad X_L = \omega L = 300 \cdot 0,0133 = 4 \Omega$$

Solution  
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{(2 + j4) \Omega} = \frac{50}{\sqrt{20}} \angle -63,4^\circ = 11,18 \angle -63,4^\circ \text{ A}$$
  
The current  $i(t)$  is  $i(t) = 11,18 \cos(300t - 63,4^\circ) \text{ A}$   
The voltage  $u(t)$  is  $u(t) = 50 \cos(300t) \text{ V}$   
The phase  $\varphi$  is  $\varphi = -63,4^\circ$   
With the complex part  $\cos(\varphi) = \frac{R}{|Z|} = \frac{2}{\sqrt{20}} = 0,447$   
 $\varphi = \arccos(0,447) = 63,4^\circ$   
The phase  $\varphi$  shall be calculated as  $\varphi = \arctan\left(\frac{-4}{2}\right) = -63,4^\circ$

### Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Given that the phasor voltage source  $\underline{U}(t) = 50 \cos(300t) \text{ V}$  and the impedance  $\underline{Z}$  are both in the components. ( $\$R\$$  and  $\$X_L\$$ ) shall be given.

After analysis, the full width dimensioned current  $i(t)$  can be extracted and the phase  $\varphi$  in phase (in  $^\circ$ ) shall be given.  $\underline{Z} = (2 + j4) \Omega$

Solution  
.. Calculation of physical values of the two components.  
Solution 
$$R = 2 \Omega \quad X_L = \omega L = 300 \cdot 0,0133 = 4 \Omega$$

Solution  
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{(2 + j4) \Omega} = \frac{50}{\sqrt{20}} \angle -63,4^\circ = 11,18 \angle -63,4^\circ \text{ A}$$
  
The current  $i(t)$  is  $i(t) = 11,18 \cos(300t - 63,4^\circ) \text{ A}$   
The voltage  $u(t)$  is  $u(t) = 50 \cos(300t) \text{ V}$   
The phase  $\varphi$  is  $\varphi = -63,4^\circ$   
With the complex part  $\cos(\varphi) = \frac{R}{|Z|} = \frac{2}{\sqrt{20}} = 0,447$   
 $\varphi = \arccos(0,447) = 63,4^\circ$   
The phase  $\varphi$  shall be calculated as  $\varphi = \arctan\left(\frac{-4}{2}\right) = -63,4^\circ$

The absolute value of the impedance is  $Z = \sqrt{R^2 + (X_L - X_C)^2}$  with  $R = 5 \Omega$ ,  $X_L = \omega L = 2\pi \cdot 50 \text{ Hz} \cdot 0.04 \text{ H} = 12.56 \Omega$  and  $X_C = \frac{1}{\omega C} = \frac{1}{2\pi \cdot 50 \text{ Hz} \cdot 10^{-6} \text{ F}} = 318.3 \Omega$ .  
 The phase  $\phi$  is given by  $\phi = \arctan\left(\frac{X_L - X_C}{R}\right) = \arctan\left(\frac{12.56 - 318.3}{5}\right) = \arctan(-63.16) \approx -89.1^\circ$ .  
 The current  $i(t)$  is  $i(t) = \frac{U_m}{Z} \sin(\omega t + \phi) = \frac{10 \text{ V}}{318.3 \Omega} \sin(2\pi \cdot 50 t - 89.1^\circ) \approx 31.4 \text{ mA} \sin(2\pi \cdot 50 t - 89.1^\circ)$ .

**Exercise E3 Impedances at different Frequencies**  
**(written test, approx. 18 % of a 60-minute written test, WS2022)**

At a series circuit with a resistor  $R = 1 \text{ k}\Omega$ , an inductor  $L = 4.7 \mu\text{H}$  and a capacitor  $C = 10 \text{ nF}$  connected in series, the current  $i(t) = 10 \text{ mA} \sin(2\pi \cdot 450 \text{ kHz} \cdot t)$  flows through the circuit.  
 Result: The resistor  $R_1$  shall have the same absolute value of the impedance as a capacitor  $C_1 = 40 \text{ nF}$  at  $f_1 = 4 \text{ MHz}$ .

Solution  
 Solution:  $R_1 = 1.00 \Omega$   
 Solution:  $R_2 = 10.0 \Omega$

A series circuit means that the current is constant on every component.  
 The equivalent impedance for  $R$  and  $L$  combined is given by  $Z_{RL} = R + j\omega L$ .  
 Parallel circuit means that the voltage is the same on  $R_2$  and  $C_1$ .  
 The equivalent impedance for  $R_2$  and  $C_1$  combined is given by  $Z_{R_2C_1} = \frac{R_2 \cdot (-j/\omega C_1)}{R_2 - j/\omega C_1}$ .  
 Since  $Z_{RL}$  and  $Z_{R_2C_1}$  are perpendicular to each other, the resulting current of the parallel circuit is given as:  
 $I_{total} = \sqrt{I_{R_2}^2 + I_{C_1}^2}$   
 This can be simplified to  $I_{total} = \frac{U}{\sqrt{R_2^2 + (X_{C_1})^2}}$  (It has to, since  $R_2$  is perpendicular to  $X_{C_1}$ ).  
 Therefore, the resulting current of the parallel circuit is given as:  
 $I_{total} = \frac{U}{\sqrt{R_2^2 + (X_{C_1})^2}}$   
 This can be simplified to  $I_{total} = \frac{U}{\sqrt{R_2^2 + (X_{C_1})^2}}$   
 Back to the first formula:  $R_3 \cdot I_{total} = X_{C_3} \cdot I_{total}$   
 $R_3 = X_{C_3} = \frac{1}{\omega C_3} = \frac{1}{2\pi \cdot 4 \text{ MHz} \cdot 10^{-8} \text{ F}} = 10 \Omega$

**Exercise E6 Impedances at different Frequencies**  
**(written test, approx. 18 % of a 60-minute written test, WS2022)**

**Resistor**  $R_1$  shall have the same absolute value of the impedance as a capacitor  $C_1 = 40 \text{ nF}$  at  $f_1 = 4 \text{ MHz}$ .

**Solution**

$$R_1 = 1.00 \text{ } \Omega$$

$$R_2 = 10.0 \text{ } \Omega$$

A series circuit means that the current is constant on every component.

The equivalent impedance for  $R$  and  $L$  combined is given by

$$Z_{RL} = R + j\omega L$$

Parallel circuit means that the voltage is the same on  $R_1$  and  $C_1$

$$Z_{RC} = \frac{R_1 \cdot Z_C}{R_1 + Z_C}$$

Since  $Z_C$  is perpendicular to  $R_1$ , this can be simplified to

$$|Z_{RC}| = \frac{R_1 \cdot |Z_C|}{\sqrt{R_1^2 + |Z_C|^2}}$$

(It has to, since  $R_1$  is perpendicular to  $j\omega L$ )

$$|Z_{RL}|^2 = R_2^2 + (\omega L)^2$$

Therefore, the resulting current of the parallel circuit is given as:

$$I_{RC} = I_{R1} + I_{C1}$$

This can be rearranged to get  $R_3$

$$R_3 = \frac{I_{RC}}{I_{R1}} \cdot \sqrt{R_2^2 + (\omega L)^2}$$

Back to the first formula:

$$R_3 \cdot I_{RC} = |Z_{RC}| \cdot I_{RC}$$

$$R_3 = \frac{|Z_{RC}| \cdot I_{RC}}{I_{RC}}$$

$$R_3 = \frac{R_1 \cdot |Z_C|}{\sqrt{R_1^2 + |Z_C|^2}}$$

**Exercise E1 Complex Impedance Circuit**  
 (written test, approx. 15 % of a 60-minute written test, WS2022)

**1. Calculate the current  $i(t)$  through the series combination of  $Z_L$  and  $Z_C$  and the voltage  $u(t) = 3.0 \text{ V} \cdot \sin(2\pi \cdot 15 \text{ kHz} \cdot t)$  across the circuit.**

**Solution**

Result

$$Z = 48.2 \text{ } \Omega \quad Z_C = 19.8 \text{ } \Omega$$

Draw the circuit diagram of the given circuit

$$Z = \frac{U}{I} \quad I = \frac{U}{Z}$$

$$Z_C = \frac{1}{2\pi \cdot f \cdot C}$$

Result

$$Z = \sqrt{R^2 + (Z_L - Z_C)^2}$$

$$Z = \sqrt{10^2 + (2\pi \cdot 15 \cdot 330 \cdot 10^{-6} - 19.8)^2}$$


$$Z = 48.2 \text{ } \Omega$$

$$Z_C = 19.8 \text{ } \Omega$$

$$Z = R + j(Z_L - Z_C)$$


$$Z = 10 + j(2\pi \cdot 15 \cdot 330 \cdot 10^{-6} - 19.8)$$



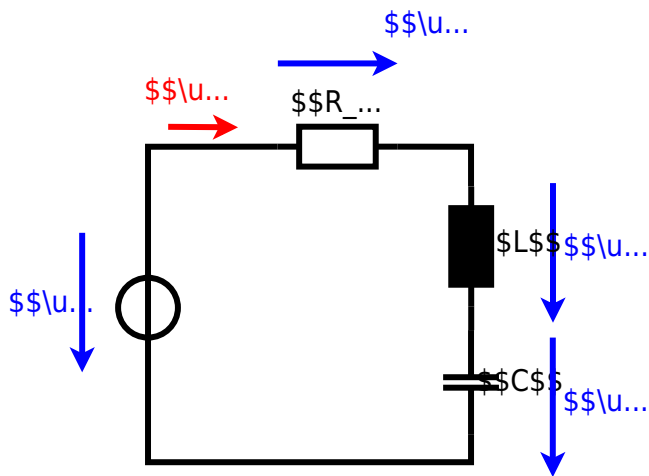





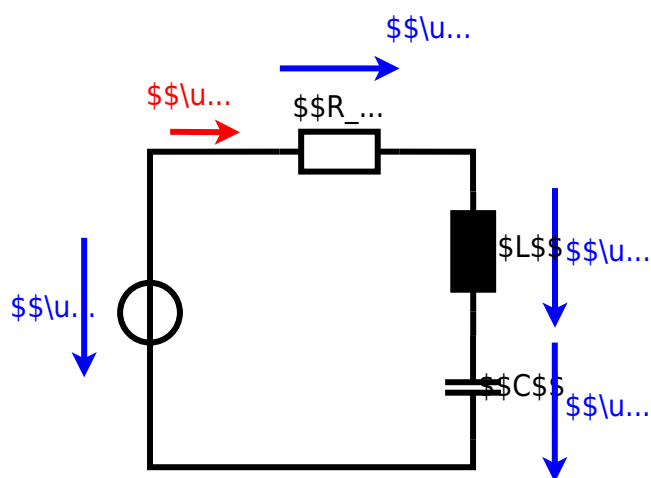

From:

<https://mexle.te.hs-heilbronn.de/> - **MEXLE Wiki**

Permanent link:

[https://mexle.te.hs-heilbronn.de/electrical\\_engineering\\_1/ws2022\\_exam](https://mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam)

Last update: **2023/08/17 11:43**

