

task_dtoqvpvrbdtozfk_with_calculation

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E1 Electrostatics I (written test, approx. 10 % of a 120-minute written test, SS2022)
..... 2

electrostatic, field lines, exam ee2 SS2022

Exercise E1 Electrostatics I

(written test, approx. 10 % of a 120-minute written test, SS2022)

2. What has been given to you? The charges are $q_1 = 1 \text{ nC}$, $q_2 = 2 \text{ nC}$, $q_0 = 1 \text{ nC}$, $q_4 = 1 \text{ nC}$. The value of the point charge q_0 is 1 nC . Which value needs E_4 to have to get a resulting force of 0 N on q_0 ?

Path: $q_0 = 1 \text{ nC}$

- $q_1 = 2 \text{ nC}$

Path: $E_4 = 2310.97 \text{ (nN/m)}$

- $\vec{F}_{01} = \left(\begin{array}{c} 19.97 \\ 0 \\ 0 \end{array} \right) \text{ (nN)}$

In the x -direction, the force components are $F_{01,x} = 19.97 \text{ nN}$. The force F_{01} is purely on the x -axis and therefore equal to $F_{01,x}$.

$$|\vec{F}_{01}| = \sqrt{\left(\sum_i F_{i,x} \right)^2 + \left(\sum_i F_{i,y} \right)^2} = \sqrt{19.97^2 + 0^2} = 19.97 \text{ nN}$$

$$|\vec{F}_{02}| = \sqrt{\left(\sum_i F_{i,x} \right)^2 + \left(\sum_i F_{i,y} \right)^2} = \sqrt{19.97^2 + 0^2} = 19.97 \text{ nN}$$

$$|\vec{F}_{03}| = \sqrt{\left(\sum_i F_{i,x} \right)^2 + \left(\sum_i F_{i,y} \right)^2} = \sqrt{19.97^2 + 0^2} = 19.97 \text{ nN}$$


$$|\vec{F}_{04}| = \sqrt{\left(\sum_i F_{i,x} \right)^2 + \left(\sum_i F_{i,y} \right)^2} = \sqrt{19.97^2 + 0^2} = 19.97 \text{ nN}$$

$$|\vec{F}_{01}| = 19.97 \text{ nN}$$

$$|\vec{F}_{02}| = 19.97 \text{ nN}$$

$$|\vec{F}_{03}| = 19.97 \text{ nN}$$

$$|\vec{F}_{04}| = 19.97 \text{ nN}$$

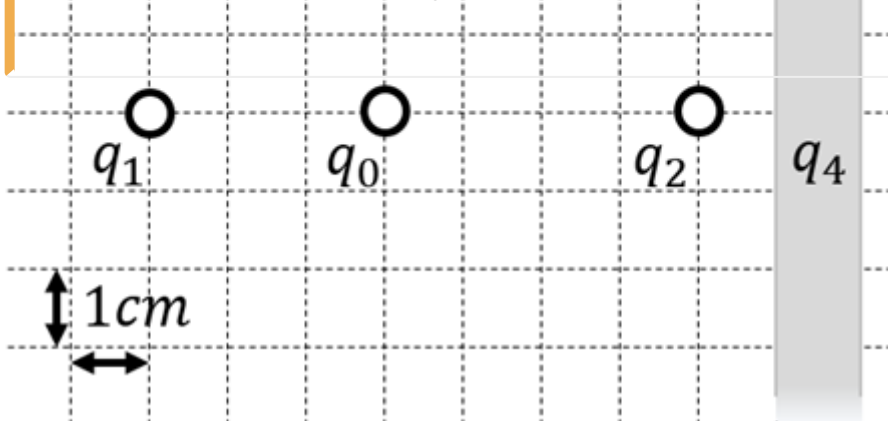

1. Calculate the single forces \vec{F}_{01} , \vec{F}_{02} , \vec{F}_{03} , on the charge q_0 !

Path

First, calculate the magnitude of the forces, like $|\vec{F}_{01}|$.

The force \vec{F}_{01} is purely on the x -axis and therefore equal to $F_{01,x}$.

$$\vec{F}_{01} = F_{01,x} \hat{x}$$

$$F_{01,x} = \frac{1}{4\pi\epsilon_0} \cdot \frac{q_1 \cdot q_0}{r_{01}^2} = \frac{1}{4\pi\epsilon_0} \cdot \frac{1 \text{ nC} \cdot 1 \text{ nC}}{(2 \text{ cm})^2} = \frac{1}{4\pi\epsilon_0} \cdot \frac{1 \text{ nC}^2}{4 \text{ cm}^2} = 19.97 \text{ nN}$$

$$F_{01,x} = 19.97 \text{ nN}$$

$$|\vec{F}_{01}| = 19.97 \text{ nN}$$

$$|\vec{F}_{02}| = 19.97 \text{ nN}$$

$$|\vec{F}_{03}| = 19.97 \text{ nN}$$

$$|\vec{F}_{04}| = 19.97 \text{ nN}$$

$\cdot 10^{-6} \frac{\text{VAs}}{\text{m}} = 19.97... \cdot 10^{-6} \frac{\text{Ws}}{\text{m}} \quad \&= 19.97... \mu\text{N} \quad \text{\texttt{\text{(to the right)}}}$

Similarly, we get for \vec{F}_{02} and \vec{F}_{03}

$$\vec{F}_{02} = F_{02,x} \quad \&= -28.09... \mu\text{N} \quad \text{\texttt{\text{(to the right)}}}$$

$$\vec{F}_{03} \quad \&= -22.47... \mu\text{N} \quad \text{\texttt{\text{(to the top left)}}}$$

For \vec{F}_{03} , we have to calculate the x - and y -component.

This is possible, by using the angle α between the line through q_0 and q_3 and the positive x -axis (pointing to the right).

So, α has to be between 90° and 180° . It can be calculated by:

$$\alpha = \arctan\left(\frac{-4\text{cm}}{+2\text{cm}}\right) = \pi - 1.1071... = 180^\circ - 63.4...^\circ = 116.6...^\circ$$

Based on this, the x - and y -component is:

$$F_{03,x} \quad \&= |\vec{F}_{03}| \cdot \cos \alpha = 10.05... \mu\text{N} \quad \text{\texttt{\text{(to the left)}}}$$

$$F_{03,y} \quad \&= |\vec{F}_{03}| \cdot \sin \alpha = 20.10... \mu\text{N} \quad \text{\texttt{\text{(to the top)}}}$$

From:

<https://mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link:

https://mexle.te.hs-heilbronn.de/electrical_engineering_and_electronics/task_dtoqpvrbdtcozfk_with_calculation

Last update: **2024/07/15 15:03**

