

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exam Winter Semester 2022	2
Additional permitted Aids	2
Hits	2
Only EEE1-relevant Part	2
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	2
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	3
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	3
Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	5
Full Exam	9
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	9
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	10
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	10
Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	12
Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	16
Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	17
Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	17
Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	18

Exam Winter Semester 2022

Additional permitted Aids

- non-programmable calculator,
- formulary (2 DIN A4 pages)

Hits

- The duration of the exam is 60 min.
- Attempts to cheat will lead to exclusion and failure of the exam.
- Withdrawal is no longer possible after these exam has been handed out.
- Please write down intermediate calculations and results on the assignment sheet. (when more space is needed also on the reverse side. In this case: Mark it clearly).
- Always use units in the calculation.
- Use a document-proof, non-red pen.

Only EEE1-relevant Part

This part is only for about 25 minutes !

Exercise E1 Resistance of a Wire by Resistivity

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. Heating elements are used to heat wire with a temperature of 180°C . An electric power dissipation (= heat flow) of $P=40\text{ W}$ is necessary.

Determine the current I needed to operate it.

The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6}\ \Omega\text{m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

∴ Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \\ &= \sqrt{\frac{P}{R}} = \sqrt{\frac{40\text{ W}}{0.33\ \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \text{with } A = r^2 \cdot \pi = \\ &= \frac{1}{4} d^2 \cdot \pi \quad \text{and } R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \text{and } R = \\ &= 1.10 \cdot 10^{-6}\ \Omega\text{m} \cdot \frac{4 \cdot 3\text{ m}}{(3.57 \cdot 10^{-3}\text{ m})^2 \cdot \pi} \end{aligned}$$

Exercise E2 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator, which has a temperature coefficient of resistance in a refrigeration system. The thermistor has a resistance of $10 \text{ k}\Omega$ at 25°C . Its temperature coefficients are: $\alpha = 0.01 \text{ } \frac{1}{\text{K}}$ and $\beta = 71 \cdot 10^{-6} \text{ } \frac{1}{\text{K}^2}$.

Result: The temperature inside the refrigeration system can reach down to -40°C .

Result: Calculate the resistance of the thermistor at -40°C .

Result: $R = 6.5 \text{ k}\Omega$

Resistance transfer characteristic of the circuit and of the heat. Therefore, a solution is to use a float up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

```

\begin{align*} R &= R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) && | \\ \text{with } \Delta T &= T_{\text{end}} - T_{\text{start}} && \\ R &= 10 \text{ k}\Omega \cdot \left(1 + 0.01 \frac{1}{\text{K}} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \frac{1}{\text{K}^2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right) && \\ &&& \end{align*}
    
```


Exercise E3 Pure Resistor Network Simplification
(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be used: $R_1 = 20 \text{ }\Omega$, $R_2 = 10 \text{ }\Omega$, $R_3 = 15 \text{ }\Omega$, $R_4 = 10 \text{ }\Omega$ and the voltage $U = 10 \text{ V}$.
 Result: R_B .

```

Solution
\begin{align*} R_{\text{eq}} &= 132.8 \text{ }\Omega && \end{align*}
    
```

Now a wye-delta transformation is necessary.

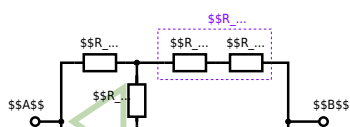


Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:
$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

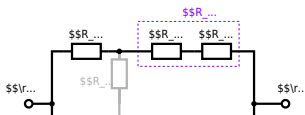


The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

**Exercise E3 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result


$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

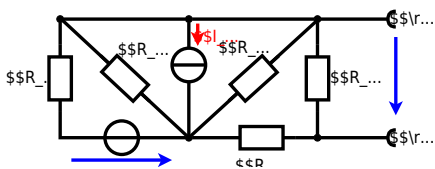


Calculate the internal resistance R_{int} and the source voltage U_s of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3=10 \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$. Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

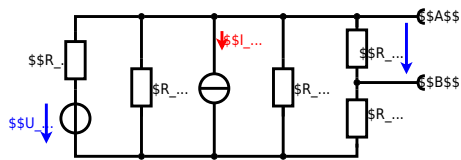

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

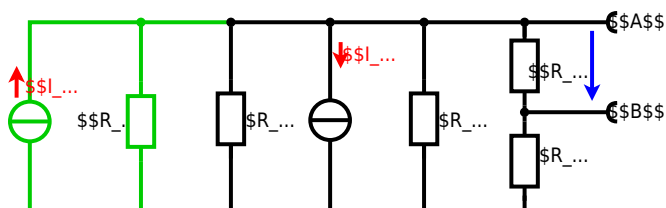

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24}$$

$$U_{24} = U_{24} \cdot \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \right) \cdot \left(\frac{U_2}{R_1} - I_4 \right) \cdot \left(\frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \right)$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$:

$$U_{AB} = \left(\frac{6.0\text{V}}{5.0\Omega} - 4.2\text{A} \right) \cdot \left(\frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \right)$$

$$R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

Full Exam

These is the full exam

Full exam

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element made of nichrome wire with a cross-section of 1.80mm^2 . Each second, a power dissipation (= heat flow) of $P=40\text{W}$ is necessary. Determine the current I needed to operate for heating elements. The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6}\Omega\text{m}$. The heating element is 3m long and has a diameter of 3.57mm . Calculate the resistance R of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40\text{W}}{0.33\Omega}}$$

$$R = \rho \cdot \frac{l}{A} \quad | \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad R = 1.10 \cdot 10^{-6}\Omega\text{m} \cdot \frac{4 \cdot 3\text{m}}{(3.57\text{mm})^2 \cdot \pi}$$

$$3 \cdot 10^{-3} \cdot (3.57 \cdot 10^{-3} \cdot R)^2 \cdot \pi$$

[electrical_engineering_and_electronics:task_rj0r6j4apumukrj6_with_calculation](#)
[resistivity, power, exam ee1 ws2022](#)

Exercise E2 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

A refrigerator is explained with the effect of temperature on the resistance of a resistor. The resistance of a resistor is given by $R = R_0 (1 + \alpha \Delta T + \beta \Delta T^2)$ for R_0 at T_0 .

Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

The temperature inside the refrigeration system can reach down to $-40 \text{ }^\circ\text{C}$.

Calculate the resistance of the thermistor at $-40 \text{ }^\circ\text{C}$.

The power transferred to the resistor $P = U^2/R$ is the heat generated. The heat flow Q is given by $Q = P \cdot t$. Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 (1 + \alpha \Delta T + \beta \Delta T^2) \quad | \text{with } \Delta T = T_{\text{end}} - T_{\text{start}}$$

$$R = 10 \cdot 10^3 \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$

[electrical_engineering_and_electronics:task_70jg4yzznocarsq_with_calculation](#)
[temperature dependent resistance, power, heat, exam ee1 ws2022](#)


Exercise E3 Pure Resistor Network Simplification
(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall hold: $R_1 = 20 \text{ } \Omega$, $R_2 = 10 \text{ } \Omega$, $R_3 = 10 \text{ } \Omega$, $R_4 = 10 \text{ } \Omega$, $R_5 = 10 \text{ } \Omega$, $R_6 = 10 \text{ } \Omega$, $R_7 = 10 \text{ } \Omega$, $R_8 = 10 \text{ } \Omega$, $R_9 = 10 \text{ } \Omega$, $R_{10} = 10 \text{ } \Omega$, $R_{11} = 10 \text{ } \Omega$, $R_{12} = 10 \text{ } \Omega$, $R_{13} = 10 \text{ } \Omega$, $R_{14} = 10 \text{ } \Omega$, $R_{15} = 10 \text{ } \Omega$, $R_{16} = 10 \text{ } \Omega$, $R_{17} = 10 \text{ } \Omega$, $R_{18} = 10 \text{ } \Omega$, $R_{19} = 10 \text{ } \Omega$, $R_{20} = 10 \text{ } \Omega$.

Solution

$$R_{\text{eq}} = 132.8 \text{ } \Omega$$

Now a wye-delta transformation is necessary.

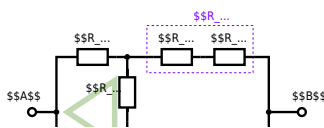

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel (R_Y + R_2 + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

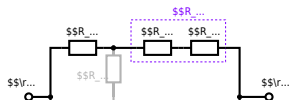

The equivalent resistor is given by a parallel configuration of resistors in series:


$$R_{\text{eq}} = (R_2 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega}$$

[electrical_engineering_and_electronics:task_x357drkaqv84jnsc_with_calculation_network_simplification,_exam_ee1_ws2022](#)

**Exercise E3 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result

$$U_{\text{S}} = U_{\text{AB}} = 4.5 \text{ V} \parallel R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

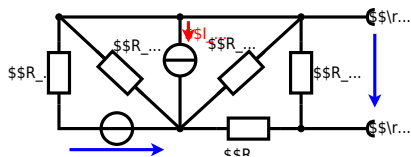


Calculated the internal resistance R_i and the source voltage U_s of an equivalent linear voltage source on the connectors A and B.

$R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \Omega$, $I_4=4.2 \text{ A}$,
 $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$


Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

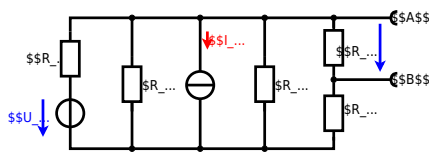


The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

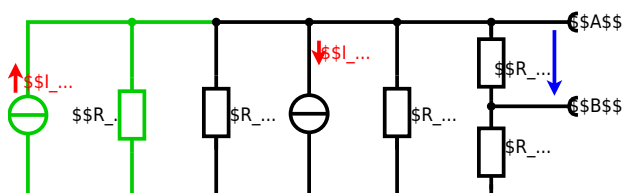

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in

parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \left\{ \frac{U_2}{R_1} \right\} - I_4$$
 The resulting circuit can again be transformed:

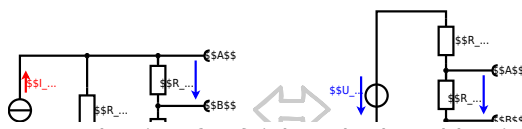

Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24} = R_{135} \cdot I_{24} = \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 . Therefore the voltage between A and B is given as:
$$U_{\text{AB}} = U_{24} \cdot \left\{ \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right\} = \left(\frac{U_2}{R_1} - I_4 \right) \cdot \left\{ \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right\}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):
$$R_{\text{AB}} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{\text{AB}} = \left\{ \frac{6.0 \text{ V}}{5.0 \Omega} \right\} - 4.2 \Omega \cdot \left\{ \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right\} || R_{\text{AB}} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$


[electrical_engineering_and_electronics:task_6tqtqtue1e2nf2c7_with_calculation](#)
 dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022

Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)

The capacitor becomes fully charged (voltage across the capacitor is U) again. The voltage across the capacitor is again 0 V at the moment $t_0=0$ s when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2=1$ ms after closing the switch.

Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_B .

The internal voltage of the equivalent source is $U \cdot \frac{R_B}{R_1 + R_B}$ and the internal resistance is $R_1 \parallel R_B$. The voltage across the capacitor is $u_c(t) = U \cdot \frac{R_B}{R_1 + R_B} (1 - e^{-t/(R_1 \parallel R_B) \cdot C})$.
On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

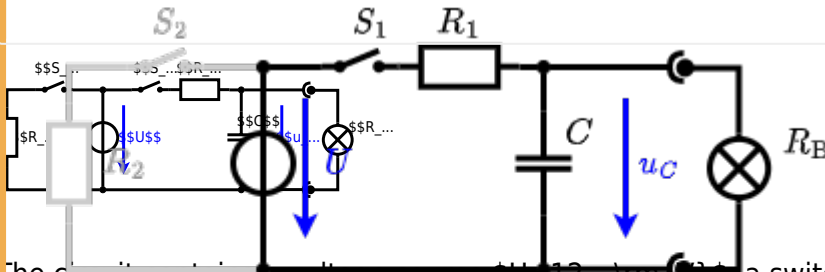


The circuit contains a voltage source $U = 12$ V, a switch S_1 , a resistor of $R_1 = 20$ Ohm and a capacitor of $C = 100$ uF.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0$ s the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0$ V.

First do not consider the light bulb - it is not connected to the RC circuit.

Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

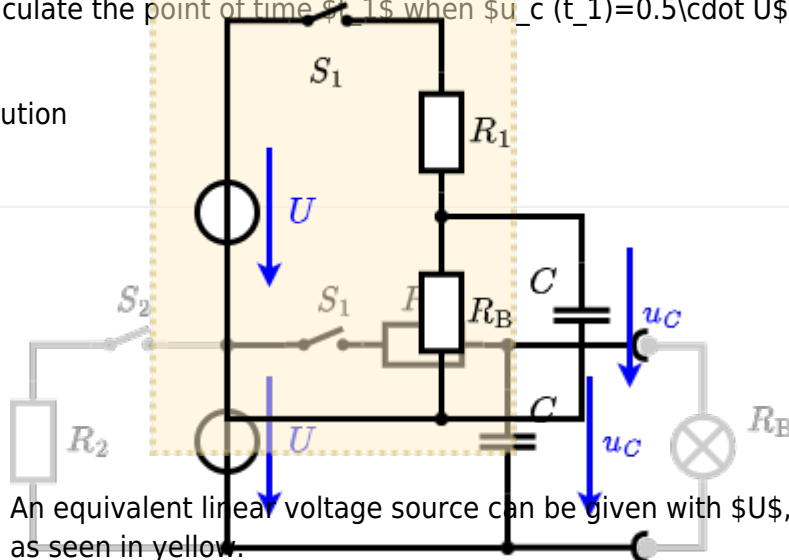

An equivalent linear voltage source can be given with U , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent instant source is $U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$. The internal resistance is given by $R_1 \parallel R_B$.

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t) = U \cdot \frac{R_B}{R_1 + R_B} (1 - e^{-t/(R_1 \parallel R_B) \cdot C})$. It has to be rearranged to $(1 - e^{-t/(R_1 \parallel R_B) \cdot C}) = 0.5$ $\Rightarrow e^{-t/(R_1 \parallel R_B) \cdot C} = 0.5$ $\Rightarrow -t/(R_1 \parallel R_B) \cdot C = \ln(0.5)$ $\Rightarrow t = R_1 \parallel R_B \cdot C \cdot \ln(2) = 100 \mu\text{s} \cdot \ln(2) \approx 69.3 \mu\text{s}$.

$$\frac{1}{2} \cdot U \cdot (1 - e^{-\frac{1}{\tau}}) \cdot I \cdot \mu F$$

electrical_engineering_and_electronics:task_tb6pi8dgh0m2e2pw_with_calculation charging capacitors, dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022

Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the effective value of the current $i(t)$ and the average power P in the circuit. The voltage $u(t)$ and the current $i(t)$ are given by $u(t) = 50 \sin(\omega t)$ V and $i(t) = 0.24 \cos(\omega t - \varphi)$ A. The effective value of the voltage U and the effective value of the current I shall be given.

After analysis, the following complex impedances can be extracted and brought into phase: $Z_1 = 2 + j4 \Omega$, $Z_2 = 4 - j2 \Omega$, $Z_3 = 1 + j5 \Omega$.

.. Calculate the physical values of the two components.
 Solution:
$$R = \frac{1}{\frac{1}{2} + \frac{1}{4 - j2} + \frac{1}{1 + j5}} = 1.67 - j1.26 \Omega$$

Solution:

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{1.67 - j1.26} = 30.4 \angle 36.9^\circ$$

 The effective value of the current is $I = 30.4$ A.
 The effective value of the voltage is $U = 50$ V.
 The average power is $P = U \cdot I \cdot \cos(\varphi) = 50 \cdot 30.4 \cdot \cos(36.9^\circ) = 1216$ W.

electrical_engineering_and_electronics:task_jti0uzudcmg4u22t_with_calculation complex impedance, exam ee1 ws2022

Exercise E6 Impedances at different Frequencies

(written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit contains a resistor with $R = 100 \Omega$ and a capacitor with $C = 40 \text{ nF}$. The voltage across the resistor is $U_R = 100 \text{ V}$ and the voltage across the capacitor is $U_C = 40 \text{ V}$. The current through the circuit is $I = 1 \text{ A}$. Calculate the total impedance Z of the circuit and the total voltage U across the series combination.

Solution

$$Z = \sqrt{R^2 + X_C^2} = \sqrt{100^2 + (1/(2\pi \cdot 40 \cdot 10^{-9}))^2} = 100 \Omega$$

$$U = I \cdot Z = 1 \text{ A} \cdot 100 \Omega = 100 \text{ V}$$

Result

The total impedance is $Z = 100 \Omega$ and the total voltage is $U = 100 \text{ V}$.

[electrical_engineering_and_electronics:task_pdkgtyexxy1ktu3_with_calculation](#)
[complex impedance, exam ee1 ws2022](#)

Exercise E7 Complex Impedance Circuit

(written test, approx. 15 % of a 60-minute written test, WS2022)


1. Calculate the effective value I_{eff} of the current $i(t) = 2 \sin(2\pi \cdot 15 \cdot t)$ A and the effective value U_{eff} of the voltage $u(t) = 3.0 \sin(2\pi \cdot 15 \cdot t)$ V. The circuit consists of a resistor $R = 10 \Omega$, an inductor $L = 10 \mu\text{H}$, and a capacitor $C = 0.22 \mu\text{F}$ in series.

Solution

Result

$$I_{eff} = 0.141 \text{ A} \quad U_{eff} = 2.12 \text{ V}$$

The effective value of the current is $I_{eff} = 0.141 \text{ A}$ and the effective value of the voltage is $U_{eff} = 2.12 \text{ V}$.

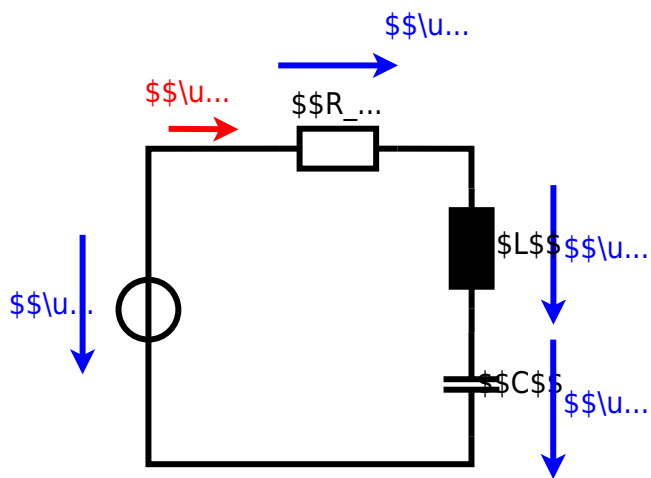

electrical_engineering_and_electronics:task_kricv9fh7haauo6q_with_calculation
complex impedance, exam ee1 ws2022

From:

<https://mexle.te.hs-heilbronn.de/> - **MEXLE Wiki**

Permanent link:

https://mexle.te.hs-heilbronn.de/electrical_engineering_and_electronics_1/ws2022_exam

Last update: **2026/01/12 00:24**

