

ws2022_exam

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E4 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	3
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	3
Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	3
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	4
Exercise E6 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	5
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	6
Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	8
Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	12
Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	16
Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	17
Exercise E2 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	19
Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	19
Exercise E3 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	20
Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	20
Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	

test, WS2022)	21
Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	24

Exercise E4 Resistance of a Wire by Resistivity
(written test, approx. 6 % of a 60-minute written test, WS2022)

A heating element made of solid nichrome wire with a diameter of $d = 0.357 \text{ mm}$ is used in an electric circuit. A power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary. Determine the current I needed to operate it. The Nichrome wire has a resistivity of $\rho = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m}$.

The heating element is $l = 3 \text{ m}$ long and has a diameter of $d = 0.357 \text{ mm}$.
 Solution: $R = \rho \cdot \frac{l}{A}$. Calculate the resistance R of the heating element.

```

solution
\begin{align*} P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \\ \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{align*}

\begin{align*} R &= \rho \cdot \frac{l}{A} \quad \text{with } A = r^2 \cdot \pi = \\ &= \frac{1}{4} d^2 \cdot \pi \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad R = \\ &= 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{align*}
  
```

Exercise E1 Resistance of a Wire by Resistivity
(written test, approx. 6 % of a 60-minute written test, WS2022)

A heating element made of solid nichrome wire with a diameter of $d = 0.357 \text{ mm}$ is used in an electric circuit. A power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary. Determine the current I needed to operate it. The Nichrome wire has a resistivity of $\rho = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m}$.

The heating element is $l = 3 \text{ m}$ long and has a diameter of $d = 0.357 \text{ mm}$.
 Solution: $R = \rho \cdot \frac{l}{A}$. Calculate the resistance R of the heating element.

```

solution
\begin{align*} P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \\ \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{align*}

\begin{align*} R &= \rho \cdot \frac{l}{A} \quad \text{with } A = r^2 \cdot \pi = \\ &= \frac{1}{4} d^2 \cdot \pi \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad R = \\ &= 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{align*}
  
```

Exercise E1 Temperature-dependent Resistance

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator exhibits a temperature coefficient of resistance in a refrigeration system. The refrigerator has a resistance of $10 \text{ k}\Omega$ at 25°C . Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

Result: The temperature inside the refrigeration system can reach down to -40°C .

Calculate the resistance of the thermal sensor at -40°C .

The power transfer resistor P depends on the current and the voltage. Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right)$$

Exercise E2 Temperature-dependent Resistance

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator exhibits a temperature coefficient of resistance in a refrigeration system. The refrigerator has a resistance of $10 \text{ k}\Omega$ at 25°C .

Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

Result: The temperature inside the refrigeration system can reach down to -40°C .

Calculate the resistance of the thermal sensor at -40°C .

The power transfer resistor P depends on the current and the voltage. Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right)$$

Exercise E6 Pure Resistor Network Simplification
(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at once, the result is given. R_{AB} .

Solution

$$R_{AB} = 132.8 \, \Omega$$

Now a wye-delta transformation is necessary.



Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{AB} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_4$$

.. The switch shall now be open. Calculate the equivalent resistance R_{AB} between terminals A and B.

Solution

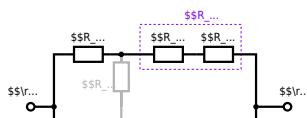

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel (500 \Omega) \parallel (200 \Omega) \parallel (500 \Omega \cdot 200 \Omega) / (500 \Omega + 200 \Omega)$$


Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved with $R_1 = 200 \Omega$, $R_2 = R_3 = 100 \Omega$ and the source $B = 15 \text{ V}$.
 Result given: $R_{\text{eq}} = 132.8 \Omega$.

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

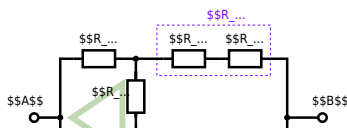


Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:
$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

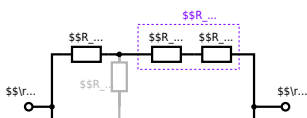


The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \, \Omega + 200 \, \Omega + 200 \, \Omega) \parallel (100 \, \Omega + 100 \, \Omega) \parallel R_{\text{eq}} = (500 \, \Omega) \parallel (200 \, \Omega) \parallel R_{\text{eq}} = \frac{500 \, \Omega \cdot 200 \, \Omega}{500 \, \Omega + 200 \, \Omega} \parallel$$

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result


$$U_{\text{s}} = U_{\text{AB}} = 4.5 \, \text{V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \, \Omega$$

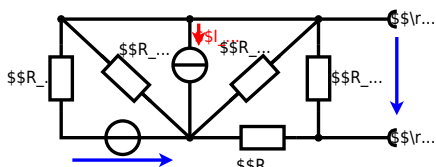


Calculate the internal resistance R_i and the source voltage U_s of an equivalent linear voltage source on the connectors A and B. $R_1=5.0 \text{ }\Omega$, $U_2=6.0 \text{ V}$, $R_3=10 \text{ }\Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \text{ }\Omega$, $R_6=7.5 \text{ }\Omega$, $R_7=15 \text{ }\Omega$. Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

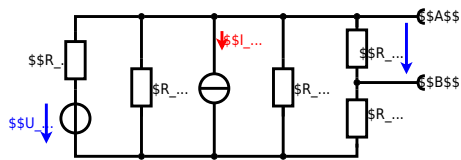

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

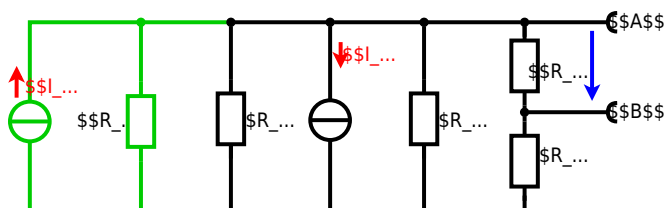

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135} + U_{24}$$

$$U_{24} = R_{135} \cdot I_{24} \quad \&= \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \quad \&= \left(\frac{U_2}{R_1} - I_4 \right) \cdot \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$


with $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$:

$$U_{AB} = \frac{6.0\text{V}}{5.0\Omega} - 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \quad R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result

$$U_s = U_{AB} = 4.5\text{V} \quad R_i = R_{AB} = 6\Omega$$

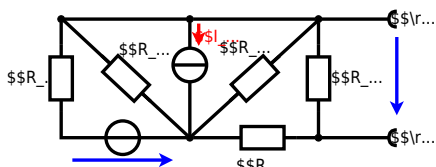


Calculated the internal resistance R_{i} and the source voltage U_{s} of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \text{ }\Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \text{ }\Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \text{ }\Omega$, $R_6=7.5 \text{ }\Omega$, $R_7=15 \text{ }\Omega$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

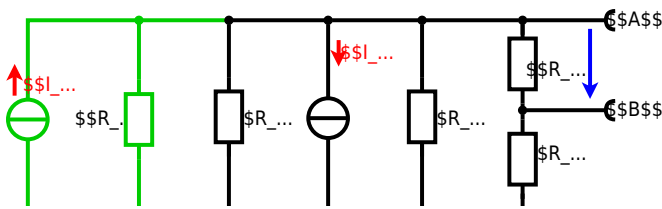

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_{24}}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24}$$

$$U_{AB} = R_{135} \cdot I_{24} = \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left\{ \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \right\} = \left(\frac{U_2}{R_1} - I_4 \right) \cdot \left\{ \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \right\}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$:

$$U_{AB} = \left(\frac{6.0\text{V}}{5.0\Omega} - 4.2\text{A} \right) \cdot \left\{ \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \right\}$$

$$R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

Exercise E5 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit below is a RC circuit consisting of a DC voltage source U , a resistor R_1 , a resistor R_2 , a capacitor C , and a switch S_1 . The switch S_1 is open. The voltage across the capacitor is again 0V at the moment $t_0=0\text{s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2=1\text{ms}$ after closing the switch.

Result: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution: The ideal voltage source U_{eq} is given by $U_{eq} = \frac{U \cdot R_2}{R_1 + R_2}$ and the internal resistance $R_{eq} = R_1 \parallel R_2$.

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .



The circuit contains a voltage source $U=12 \text{ V}$, a switch S_1 , a resistor of $R_1=20 \text{ }\Omega$ and a capacitor of $C=100 \text{ }\mu\text{F}$. The switch S_2 to an additional consumer R_2 will be considered to be open for the first task. At the moment $t_0=0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0)=0 \text{ V}$.



First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_c(t_1)=0.5 \cdot U$.

Solution



So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1)=0.5 \cdot U$:
$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5)$ An equivalent linear voltage source can be given with U_s , R_1 and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$ The internal resistance is given by substituting the ideal voltage source with its resistance ($=0 \text{ }\Omega$, short-circuit).
$$R_i = R_1 \parallel R_B = 10 \text{ }\Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ ms} / (10 \text{ }\Omega \cdot 100 \text{ }\mu\text{F})})$$

Exercise E4 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (as shown in the solution) consists of a 12 V DC voltage source, a $20 \text{ }\Omega$ resistor, a $100 \text{ }\mu\text{F}$ capacitor, a $20 \text{ }\Omega$ resistor, and a light bulb. The voltage across the capacitor is again 0 V at the moment $t_0=0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2=1 \text{ ms}$ after closing the switch.

Solution To solve this, first create an equivalent linear voltage source from U , R_1 , and R_B .
$$U_s = U \cdot \frac{R_B}{R_1 + R_B} = 6 \text{ V}$$

$$R_i = R_1 \parallel R_B = 10 \text{ }\Omega$$

Solution

The ideal voltage source is $U = 12 \text{ V}$. The internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .



The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ }\Omega$ and a capacitor of $C = 100 \text{ }\mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

First do not consider the light bulb - it is not connected to the RC circuit.

Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.



Solution

An equivalent linear voltage source can be given with U , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($R = 0 \text{ }\Omega$, short-circuit).

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2 / (R_1 \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t_2 / (10 \text{ ms} / (10 \text{ }\Omega \cdot 100 \text{ }\mu\text{F}))})$$

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$: $u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$. It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$

Exercise E2 Analyzing complex Impedances
 (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Given that the phasor voltage source $\underline{U}(t) = 50 \cos(300t) \text{ V}$ and the impedances \underline{Z}_1 and \underline{Z}_2 are both real components. ($\$R\$ and \underline{X}_1) shall be given.$

After analysis, the full width dimensioned current $i(t)$ can be extracted and written in the form $i(t) = I_m \cos(\omega t + \varphi)$ with I_m in A and φ in degrees.

Solution
 .. Calculation of physical values of the two components.
 Solution
$$R = 0.24 \text{ } \Omega \quad \varphi = 0^\circ$$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \underline{Z} = 0.24 + j4.68 \text{ } \Omega$$
 The current $i(t)$ is the real part of $\underline{I} e^{j\omega t}$.
 The resulting current $i(t) = 0.24 \cos(300t - 90^\circ) \text{ A}$.
 Therefore, the current $i(t)$ is $0.24 \cos(300t - 90^\circ) \text{ A}$.
 Impedance $\underline{Z} = 0.24 + j4.68 \text{ } \Omega$.

$$\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{4.68}{0.24}\right) = 87.06^\circ$$
 The phase φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right)$.
 With the complex part $\varphi = 87.06^\circ$.

$$\varphi = \arctan\left(\frac{4.68}{0.24}\right) = 87.06^\circ$$
 The phase φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right)$.

Exercise E5 Analyzing complex Impedances
 (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Given that the phasor voltage source $\underline{U}(t) = 50 \cos(300t) \text{ V}$ and the impedances \underline{Z}_1 and \underline{Z}_2 are both real components. ($\$R\$ and \underline{X}_1) shall be given.$

After analysis, the full width dimensioned current $i(t)$ can be extracted and written in the form $i(t) = I_m \cos(\omega t + \varphi)$ with I_m in A and φ in degrees.

Solution
 .. Calculation of physical values of the two components.
 Solution
$$R = 0.24 \text{ } \Omega \quad \varphi = 0^\circ$$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \underline{Z} = 0.24 + j4.68 \text{ } \Omega$$
 The current $i(t)$ is the real part of $\underline{I} e^{j\omega t}$.
 The resulting current $i(t) = 0.24 \cos(300t - 90^\circ) \text{ A}$.
 Therefore, the current $i(t)$ is $0.24 \cos(300t - 90^\circ) \text{ A}$.
 Impedance $\underline{Z} = 0.24 + j4.68 \text{ } \Omega$.

$$\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{4.68}{0.24}\right) = 87.06^\circ$$
 The phase φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right)$.
 With the complex part $\varphi = 87.06^\circ$.

$$\varphi = \arctan\left(\frac{4.68}{0.24}\right) = 87.06^\circ$$
 The phase φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right)$.

The absolute value of the impedance is $Z = \sqrt{R^2 + (X_L - X_C)^2}$ with $R = 5 \Omega$, $X_L = \omega L = 2\pi \cdot 4 \text{ MHz} \cdot 100 \text{ nH} = 2.51 \text{ m}\Omega$ and $X_C = \frac{1}{\omega C} = \frac{1}{2\pi \cdot 4 \text{ MHz} \cdot 10 \text{ nF}} = 3.98 \text{ m}\Omega$.
 The phase φ is given by $\varphi = \arctan\left(\frac{X_L - X_C}{R}\right) = \arctan\left(\frac{2.51 - 3.98}{5}\right) = -0.24 \text{ rad}$.
 With the complex part comes the physical value: $I = \frac{U}{Z} = \frac{50 \text{ V}}{\sqrt{5^2 + (2.51 - 3.98)^2}} = 9.9 \text{ A}$.
 The phase φ is $\varphi = -0.24 \text{ rad} = -13.7^\circ$.

Exercise E3 Impedances at different Frequencies
 (written test, approx. 18 % of a 60-minute written test, WS2022)

At a series circuit with a resistor $R_1 = 1 \text{ k}\Omega$, a capacitor $C_1 = 40 \text{ nF}$ and an inductor $L_1 = 4.7 \text{ }\mu\text{H}$ in AC with a voltage $U = 50 \text{ V}$ and a frequency $f = 450 \text{ kHz}$.
 Result: $Z = 1.00 \text{ }\Omega$, $I = 50 \text{ A}$, $\varphi = -0.24 \text{ rad}$.
 A resistor R_1 shall have the same absolute value of the impedance as a capacitor $C_1 = 40 \text{ nF}$ at $f_1 = 4 \text{ MHz}$.

Solution
 Solution: $R_1 = 1.00 \text{ }\Omega$
 Solution: $R_2 = 10.0 \text{ }\Omega$

A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $Z_{RL} = \sqrt{R^2 + X_L^2}$.
 Parallel circuit means that the voltage is the same on R_2 and C_2 .
 The equivalent impedance for R_2 and C_2 combined is given by $Z_{RC} = \frac{R_2 \cdot X_C}{\sqrt{R_2^2 + X_C^2}}$.
 Since $Z_{RL} = Z_{RC}$, we have $\sqrt{R^2 + X_L^2} = \frac{R_2 \cdot X_C}{\sqrt{R_2^2 + X_C^2}}$.
 Squaring both sides: $R^2 + X_L^2 = \frac{R_2^2 \cdot X_C^2}{R_2^2 + X_C^2}$.
 Rearranging: $R^2(R_2^2 + X_C^2) + X_L^2(R_2^2 + X_C^2) = R_2^2 \cdot X_C^2$.
 $R^2 R_2^2 + R^2 X_C^2 + X_L^2 R_2^2 + X_L^2 X_C^2 = R_2^2 X_C^2$.
 $R^2 R_2^2 + X_L^2 R_2^2 = R_2^2 X_C^2 - R^2 X_C^2 - X_L^2 X_C^2$.
 $R^2 + X_L^2 = X_C^2 - \frac{R^2 X_C^2}{R_2^2} - X_L^2 X_C^2$.
 Therefore, the resulting current of the parallel circuit is given as:
 $I = \frac{U}{Z} = \frac{50 \text{ V}}{\sqrt{1.00^2 + (2.51 - 3.98)^2}} = 9.9 \text{ A}$.
 This current is the same as the current through R_2 : $I = \frac{U}{Z_{RC}} = \frac{50 \text{ V}}{\frac{R_2 \cdot X_C}{\sqrt{R_2^2 + X_C^2}}} = 9.9 \text{ A}$.
 Back to the first formula: $R_2 \cdot X_C = \sqrt{R^2 + X_L^2} \cdot \sqrt{R_2^2 + X_C^2}$.
 $R_2 \cdot \frac{1}{2\pi \cdot 4 \text{ MHz} \cdot 40 \text{ nF}} = \sqrt{1^2 + (2.51)^2} \cdot \sqrt{R_2^2 + (3.98)^2}$.
 $R_2 = \sqrt{1^2 + (2.51)^2} \cdot \sqrt{R_2^2 + (3.98)^2} \cdot 2\pi \cdot 4 \text{ MHz} \cdot 40 \text{ nF}$.
 $R_2 = 10.0 \text{ }\Omega$.

Exercise E6 Impedances at different Frequencies
 (written test, approx. 18 % of a 60-minute written test, WS2022)

Resistor R_1 shall have the same absolute value of the impedance as a capacitor $C_1 = 40 \text{ nF}$ at $f_1 = 4 \text{ MHz}$.

Solution

$$R_1 = 1.00 \text{ } \Omega$$

$$R_2 = 10.0 \text{ } \Omega$$

A series circuit means that the current is constant on every component.

The equivalent impedance for R and L combined is given by

$$Z_{RL} = R + j\omega L$$

Parallel circuit means that the voltage is the same on R_2 and C_1

$$Z_{RC} = \frac{R_2 \cdot (-j/\omega C_1)}{R_2 - j/\omega C_1}$$

Since R_2 and C_1 are perpendicular to each other, the resulting current of the parallel circuit is given as:

$$I_{RC} = \sqrt{I_{R2}^2 + I_{C1}^2}$$

Therefore, the resulting current of the parallel circuit is given as:

$$I_{RC} = \sqrt{I_{R2}^2 + I_{C1}^2}$$

Back to the first formula:

$$R_3 \cdot I_{RC} = X_{C3} \cdot I_{RC}$$

$$R_3 = \frac{X_{C3} \cdot I_{RC}}{I_{RC}}$$

$$R_3 = \frac{1}{2\pi \cdot f \cdot C_3} \cdot \frac{1}{\sqrt{R_2^2 + (1/\omega C_1)^2}}$$

Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

1. Calculate the current $i(t)$ through the resistor R in the circuit shown in the figure. The voltage source is $u(t) = 3.0 \text{ V} \cdot \sin(2\pi \cdot 15 \text{ kHz} \cdot t)$.

Solution

Result

$$Z = 48.2 \text{ } \Omega \quad Z_C = 19.8 \text{ } \Omega$$

Draw the circuit diagram of the given circuit with all components, voltages, and currents.


$$Z = \frac{U}{I} \quad I = \frac{U}{Z}$$


$$Z_C = \frac{1}{2\pi \cdot f \cdot C}$$

Result

$$I = \frac{3.0 \text{ V}}{\sqrt{48.2^2 + 19.8^2}} = 0.107 \text{ A} = 107 \text{ mA}$$

$$i(t) = 107 \text{ mA} \cdot \sin(2\pi \cdot 15 \text{ kHz} \cdot t)$$

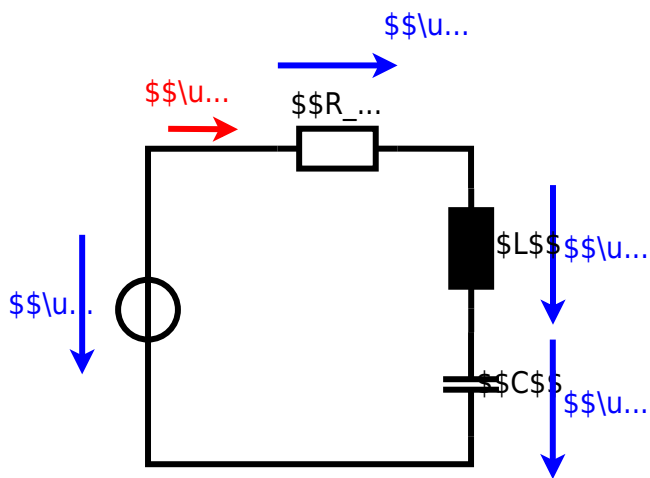

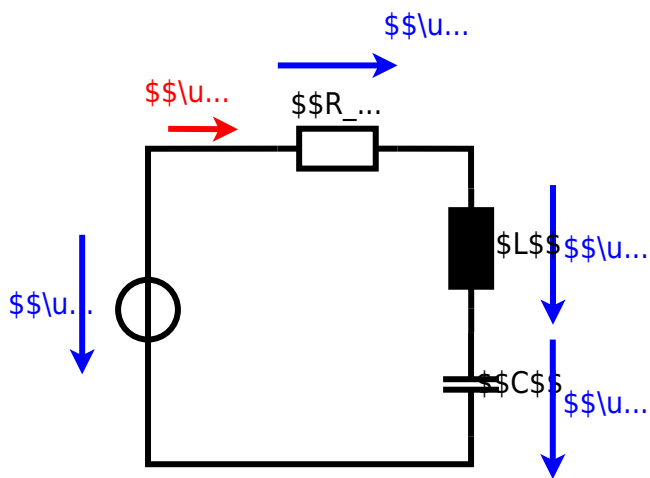

From:

<https://mexle.te.hs-heilbronn.de/> - **MEXLE Wiki**

Permanent link:

https://mexle.te.hs-heilbronn.de/ee1/ws2022_exam

Last update: **2023/04/02 00:45**

