

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 3

Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 6

Exercise E2 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 7

Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 7

Exercise E3 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 11

Exercise E4 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 11

Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) 12

Exercise E6 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 13

Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 15

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 19

Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 20

Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 20

Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 24

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 24

Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,


WS2022)	25
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	26

~~#@ee1_taskctr.#~~

**Exercise E1 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result


$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \text{ } \Omega \end{aligned}$$

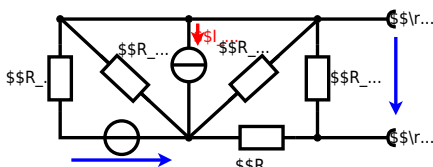

Calculate the internal resistance R_{i} and the source voltage U_{rs} of an equivalent linear voltage source on the connectors A and B .
 $R_1=5.0 \text{ } \Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \text{ } \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \text{ } \Omega$, $R_6=7.5 \text{ } \Omega$, $R_7=15 \text{ } \Omega$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

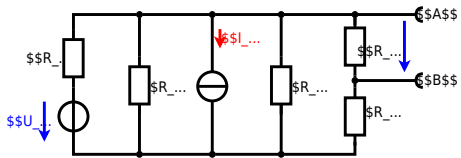

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :



Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{56}$$

$$U_{24} = U_{23} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5}$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) \cdot \left(\frac{U_{23}}{R_1} - I_4 \right) \cdot \left(\frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right)$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \left(\frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot \left(\frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right) || R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

~~#@ee1_taskctr.##~~

Exercise E1 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. The diagram shows a temperature-dependent resistor with a temperature coefficient of resistance α and a temperature T inside the refrigerator. The resistor has a resistance of $10 \text{ k}\Omega$ at 25°C . Calculate the resistance of the thermistor at -40°C .

Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

The temperature inside the refrigeration system can reach down to -40°C .

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

Resistor transfer resistor R and U are given. The power P is $P = \frac{U^2}{R}$. Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad | \quad \text{with } \Delta T = T_{\text{end}} - T_{\text{start}}$$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

~~#@ee1_taskctr.#~~

Exercise E2 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage \underline{U} and the phasor current \underline{I} in the circuit shown in the figure. The components R and X_L shall be given.

After analysis, the following phasors shall be determined and extracted in the form $\underline{U} = U \cdot e^{j(\omega t + \varphi)}$ and $\underline{I} = I \cdot e^{j(\omega t + \varphi)}$.

Solution
.. Calculation of the physical values of the components.
Solution
$$\underline{U} = 50 \text{ V} \cdot e^{j(\omega t + \varphi)}$$

Solution
$$\underline{U} = \underline{U} \cdot \frac{1}{\underline{Z}} \parallel \underline{I} = \frac{50}{4.68 - j0.24} \parallel \underline{I}$$

The current and voltage are in phase since the circuit is purely resistive.
resulting $\underline{U} = 50 \text{ V} \cdot e^{j(\omega t + \varphi)}$
The phase, the component R is a capacitor with the ω value $\frac{1}{\omega C} = 4.68$
$$\underline{U} = \underline{U} \cdot \frac{1}{\underline{Z}} \parallel \underline{I} = \frac{50}{4.68 - j0.24} \parallel \underline{I}$$

$$\underline{U} = \underline{U} \cdot \frac{1}{\underline{Z}} \parallel \underline{I} = \frac{50}{4.68 - j0.24} \parallel \underline{I}$$

With the complex part comes the complex value $\underline{U} = 50 \text{ V} \cdot e^{j(\omega t + \varphi)}$
$$\underline{U} = \underline{U} \cdot \frac{1}{\underline{Z}} \parallel \underline{I} = \frac{50}{4.68 - j0.24} \parallel \underline{I}$$

The phase φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{-0.24}{4.68}\right)$

~~#@ee1_taskctr.#~~

Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage \underline{U} and the phasor current \underline{I} in the circuit shown in the figure. The components R and X_L shall be given. The source $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$ V is connected to a series combination of a resistor of $10 \text{ }\Omega$ and a capacitor of $30 \text{ }\mu\text{F}$.

Solution
Result
.. Draw the circuit diagram of the given circuit.
label all components, voltages, and currents.

```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi f = 2\pi \cdot 15 \\
\omega &= 2\pi \cdot 15 = 94.2 \text{ rad/s} \\
\end{align*}
\begin{align*} Z_L &= 2\pi f L = 2\pi \cdot 15 \cdot 330 \cdot 10^{-6} \\
&= 3.16 \text{ } \Omega \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} = \frac{1}{2\pi \cdot 15 \cdot 330 \cdot 10^{-6}} \\
&= 159.15 \text{ } \Omega \\
\end{align*}
\underline{Z} = R + \underline{Z}_L + \underline{Z}_C \quad \underline{Z} = R + j \\
\cdot \underline{Z}_L - j \cdot \underline{Z}_C \quad \underline{Z} = R + j(\underline{Z}_L - \underline{Z}_C) \quad |\underline{Z}| = \\
\sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2}

```

□□□□□□□□ □510...



~~#@ee1_taskctr.#~~

Exercise E3 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit means that the current is constant on every component.
 The equivalent impedance for R_1 and R_2 combined is given by $Z_{R1R2} = R_1 + R_2$
 Parallel circuit means that the voltage is the same on R_3 and C_1
 The resulting current of the parallel circuit is given as:
 $I_{R3C1} = I_{R3} + I_{C1}$
 $I_{R3C1} = \frac{U}{R_3} + \frac{U}{X_{C1}}$
 $I_{R3C1} = \frac{U}{R_3} + \frac{U}{\frac{1}{\omega C_1}}$
 $I_{R3C1} = \frac{U}{R_3} + U \cdot \omega C_1$
 $I_{R3C1} = \frac{U}{R_3} + U \cdot 2\pi \cdot f \cdot C_1$
 $I_{R3C1} = \frac{U}{R_3} + U \cdot 2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}$
 $I_{R3C1} = \frac{U}{R_3} + U \cdot 0.5024$
 Back to the first formula:
 $R_3 \cdot I_{R3C1} = X_{C1} \cdot I_{R3C1} \cdot \frac{R_3}{X_{C1}}$
 $R_3 \cdot I_{R3C1} = X_{C1} \cdot I_{R3C1} \cdot \frac{R_3}{\frac{1}{\omega C_1}}$
 $R_3 \cdot I_{R3C1} = X_{C1} \cdot I_{R3C1} \cdot R_3 \cdot \omega C_1$
 $R_3 \cdot I_{R3C1} = \frac{1}{\omega C_1} \cdot I_{R3C1} \cdot R_3 \cdot \omega C_1$
 $R_3 \cdot I_{R3C1} = I_{R3C1} \cdot R_3$
 $R_3 = R_3$

Solution

$R_1 = 1.00 \text{ } \Omega$

$R_2 = 10.0 \text{ } \Omega$

A series circuit means that the current is constant on every component.
 The equivalent impedance for R_1 and R_2 combined is given by $Z_{R1R2} = R_1 + R_2$
 Parallel circuit means that the voltage is the same on R_3 and C_1
 The resulting current of the parallel circuit is given as:
 $I_{R3C1} = I_{R3} + I_{C1}$
 $I_{R3C1} = \frac{U}{R_3} + \frac{U}{X_{C1}}$
 $I_{R3C1} = \frac{U}{R_3} + \frac{U}{\frac{1}{\omega C_1}}$
 $I_{R3C1} = \frac{U}{R_3} + U \cdot \omega C_1$
 $I_{R3C1} = \frac{U}{R_3} + U \cdot 2\pi \cdot f \cdot C_1$
 $I_{R3C1} = \frac{U}{R_3} + U \cdot 2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}$
 $I_{R3C1} = \frac{U}{R_3} + U \cdot 0.5024$
 Back to the first formula:
 $R_3 \cdot I_{R3C1} = X_{C1} \cdot I_{R3C1} \cdot \frac{R_3}{X_{C1}}$
 $R_3 \cdot I_{R3C1} = X_{C1} \cdot I_{R3C1} \cdot \frac{R_3}{\frac{1}{\omega C_1}}$
 $R_3 \cdot I_{R3C1} = X_{C1} \cdot I_{R3C1} \cdot R_3 \cdot \omega C_1$
 $R_3 \cdot I_{R3C1} = \frac{1}{\omega C_1} \cdot I_{R3C1} \cdot R_3 \cdot \omega C_1$
 $R_3 \cdot I_{R3C1} = I_{R3C1} \cdot R_3$
 $R_3 = R_3$

~~#@ee1_taskctr.#~~

Exercise E4 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element is used to heat the wire with a temperature of $180 \text{ } ^\circ\text{C}$.
 The power dissipation (= heat flow) of $P=40 \text{ W}$ is necessary.
 Calculate the current I needed to operate it.
 The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

Solution

$R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m}$

Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad | \quad R &= \rho \cdot \frac{l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$


~~#@ee1_taskctr.#~~

Exercise E5 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance R_1 of the battery. The capacitor C is initially uncharged. The switch S_1 is closed at $t_0 = 0 \text{ s}$ and the voltage across the capacitor is again U_c at the moment $t_2 = 1 \text{ ms}$ after closing the switch. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution
Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution
The ideal voltage source U is in series with the internal resistance R_1 and the external resistor R_2 . The voltage across the capacitor is $u_c(t) = U \cdot (1 - e^{-t/\tau})$, where $\tau = (R_1 + R_2) \cdot C$.
On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

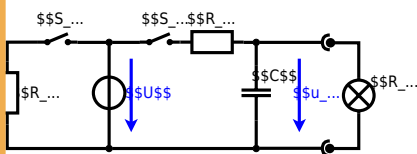


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

- 1. First do not consider the light bulb - it is not connected to the RC circuit.
- 2. Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

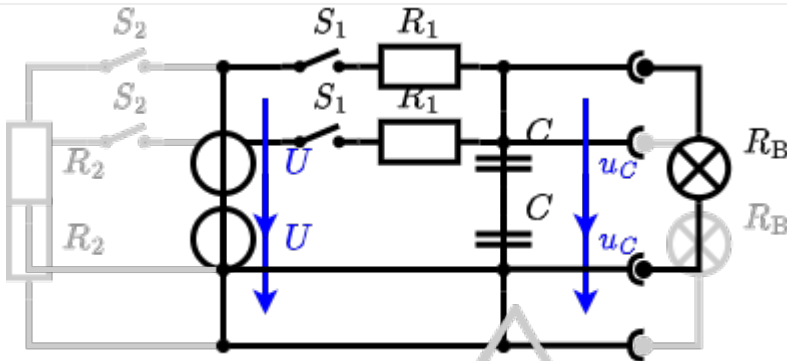

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_C(t_1) = 0.5 \cdot U$:

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$
 The internal resistance is given by substituting the ideal voltage source with its resistance ($\rightarrow 0 \Omega$, short-circuit).
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms}/(10 \Omega \cdot 100 \mu\text{F})})$$


~~#@ee1_taskctr.#~~

Exercise E6 Pure Resistor Network Simplification
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0°C. On the left, $R_1 = R_2 = 1.5 \text{ k}\Omega$ and the voltage source $U = 10 \text{ V}$.
 Result: R_B .

Solution

$R_2 = R_3 = 100 \Omega$

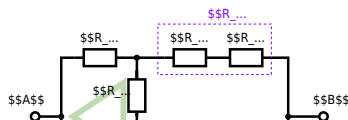

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

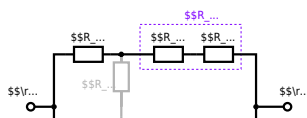

The equivalent resistor is given by a parallel configuration of resistors in series:


$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

~~#@ee1_taskctr.#~~

**Exercise E3 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

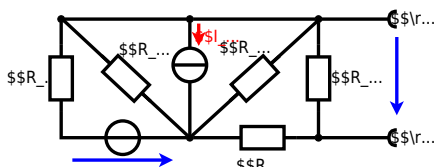


Calculated the internal resistance R_{int} and the source voltage U_s of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \Omega$, $U_s=6.0 \text{ V}$, $R_2=10 \Omega$, $I_4=4.2 \text{ A}$, $R_3=10 \Omega$, $R_4=7.5 \Omega$, $R_5=15 \Omega$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

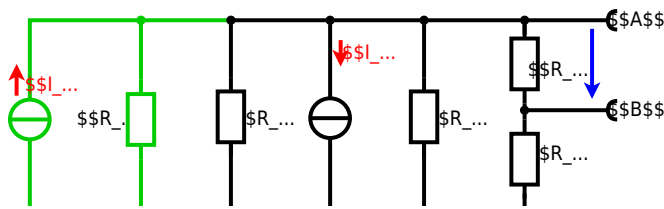

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{67}$$

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 || R_3 || R_5$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \left(\frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot 15 \Omega \cdot 2.5 \Omega \cdot \frac{1}{7.5 \Omega + 15 \Omega + 2.5 \Omega}$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

~~#@ee1_taskctr.##~~

Exercise E2 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. The diagram shows a temperature-dependent resistor with a temperature coefficient of resistance $\alpha = 0.01 \text{ K}^{-1}$ and a temperature constant $\beta = 71 \text{ K}^2$. The resistor has a resistance of $10 \text{ k}\Omega$ at 25°C . Calculate the resistance of the thermistor at -40°C .

Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^2$.

The temperature inside the refrigeration system can reach down to -40°C .

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

Resistor transfer resistor R and R_0 are in the circuit and U is constant. Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^2 \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

~~#@ee1_taskctr.#~~

Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage \underline{U} and the complex power \underline{S} in the circuit shown in the figure. The current \underline{i} and the voltage \underline{u} shall be given.

After analysis, the following phasors can be determined: $\underline{u} = 4.68 \cdot \sin(\omega t - 2.6^\circ)$ V and $\underline{i} = 0.24 \cdot \sin(\omega t + 1.6^\circ)$ A.

Solution
.. Calculate the physical values of the components.
Solution $\underline{R} = 10 \Omega$, $\underline{L} = 2.6 \text{ mH}$, $\underline{C} = 100 \text{ nF}$

Solution
$$\underline{U} = \underline{U}_R + \underline{U}_L + \underline{U}_C = \underline{I} \cdot (\underline{R} + \underline{Z}_L + \underline{Z}_C)$$

The current \underline{i} is given as $i(t) = 0.24 \cdot \sin(\omega t + 1.6^\circ)$ A. The voltage \underline{u} is given as $u(t) = 4.68 \cdot \sin(\omega t - 2.6^\circ)$ V.
The impedance of the resistor is $\underline{Z}_R = 10 \Omega$. The impedance of the inductor is $\underline{Z}_L = j\omega L = j2.6 \text{ mH} \cdot \omega = j0.026 \Omega$. The impedance of the capacitor is $\underline{Z}_C = -j/\omega C = -j/(\omega \cdot 100 \text{ nF}) = -j3.18 \Omega$.
The total impedance is $\underline{Z} = 10 \Omega + j0.026 \Omega - j3.18 \Omega = 10 \Omega - j3.154 \Omega$.
The voltage \underline{U} is $\underline{U} = \underline{I} \cdot \underline{Z} = 0.24 \text{ A} \cdot (10 \Omega - j3.154 \Omega) = 2.4 \text{ V} - j0.757 \text{ V}$.
The complex power \underline{S} is $\underline{S} = \underline{U} \cdot \underline{I}^* = (2.4 - j0.757) \text{ V} \cdot (0.24 \text{ A})^* = 0.576 \text{ W} - j0.181 \text{ var}$.
The phase angle φ can be calculated as $\varphi = \arctan(\frac{\text{Im}(\underline{U})}{\text{Re}(\underline{U})}) = \arctan(\frac{-0.757}{2.4}) = -17.3^\circ$.

~~#@ee1_taskctr.#~~

Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the steady-state phasor voltage \underline{u} and the complex power \underline{S} in the circuit shown in the figure. The current \underline{i} and the voltage \underline{u} shall be given. The voltage source is $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$ V. The frequency is $f = 15 \text{ Hz}$.

Solution
The circuit consists of a voltage source $\underline{U}_s = 3.0 \text{ V}$, an inductor $\underline{Z}_L = j\omega L = j2.25 \text{ mH} \cdot \omega = j0.0225 \Omega$, and a capacitor $\underline{Z}_C = -j/\omega C = -j/(\omega \cdot 22 \text{ }\mu\text{F}) = -j2.02 \Omega$, all in series.

Result
.. Draw the circuit diagram of the given circuit. Label all components, voltages, and currents.
Solution $\underline{Z} = 19.731 \text{ }\Omega$, $\underline{U} = 48.2 \text{ V}$, $\underline{S} = 19.8 \text{ W}$

```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi \cdot 15 \\
\omega &= 2\pi \cdot 15 \cdot 10^{-3} = 942 \text{ rad/s} \\
\begin{align*} I &= \frac{U}{Z} = \frac{10 \text{ V}}{\sqrt{R^2 + \left(\frac{1}{\omega C} - \omega L\right)^2}} \\
&= \frac{10}{\sqrt{30^2 + \left(\frac{1}{942 \cdot 10^{-6}} - 942 \cdot 0.02\right)^2}} \\
&= 19.28 \text{ mA} \quad \omega = 19.28 \cdot 2\pi \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot 15 \cdot 10^{-3} \cdot 10^{-6}} \\
&= 5510 \text{ } \Omega \\
\end{align*}
\underline{Z} = R + j\underline{Z}_L + \underline{Z}_C \quad \underline{Z} = R + j \\
\cdot \underline{Z}_L - j \cdot \underline{Z}_C \quad \underline{Z} = R + j(\underline{Z}_L - \underline{Z}_C) \quad |\underline{Z}| = \\
\sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2}

```

□□□□□□□□ 5510...



Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad | \quad R &= \rho \cdot \frac{l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$


~~#@ee1_taskctr.#~~

Exercise E4 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance of the battery. The voltage across the capacitor is again $U_c(t_2)$ at the moment $t_2 = 1 \text{ ms}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution
Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution
The ideal voltage source U is in series with the internal resistance R_1 and the external resistance R_2 . The voltage across the capacitor is $u_c(t)$.
On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

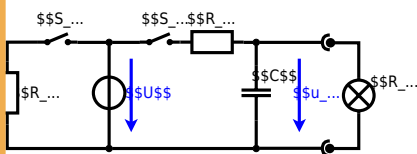


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

- .. First do not consider the light bulb - it is not connected to the RC circuit.
- Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

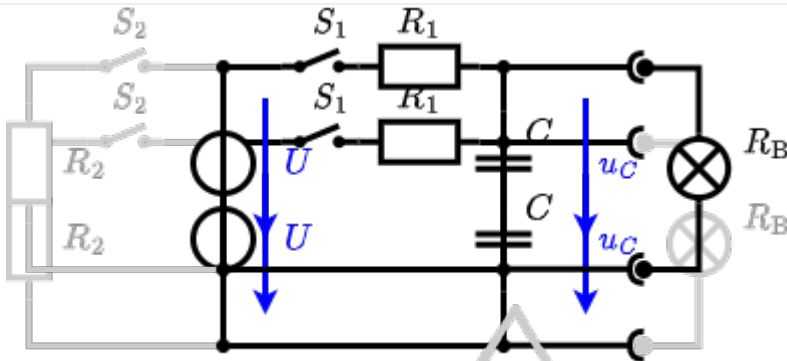

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_C(t_1) = 0.5 \cdot U$:

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$
 The internal resistance is given by substituting the ideal voltage source with its resistance ($= 0 \Omega$, short-circuit).
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms} / (10 \Omega \cdot 100 \mu\text{F})})$$


~~#@ee1_taskctr.#~~

Exercise E3 Pure Resistor Network Simplification
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0°C. $R_1 = R_2 = R_3 = 10 \Omega$, $C = 1 \mu\text{F}$ and the switch is given. R_B .

Solution

R_{eq} (transfer function) $\omega = 100 \text{ rad/s}$

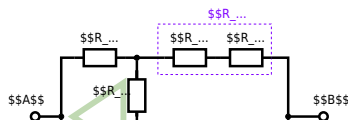

Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{eq} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

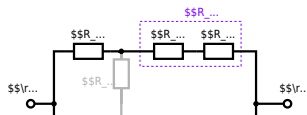

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = (500 \sim \Omega) \parallel (200 \sim \Omega) \parallel R_{\text{eq}} = \frac{500 \sim \Omega \cdot 200 \sim \Omega}{500 \sim \Omega + 200 \sim \Omega}$$

From: <https://mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link: https://mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1678504927

Last update: 2023/03/11 04:22

