

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	3
Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	6
Exercise E2 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	7
Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	7
Exercise E3 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	11
Exercise E4 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	11
Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	12
Exercise E6 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	13
Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	15
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	19
Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	20
Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	20
Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	24
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	24
Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,	


WS2022)	25
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	26

d

**Exercise E1 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result

$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \text{ } \Omega \end{aligned}$$

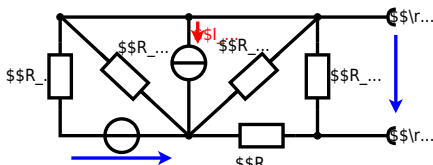

Calculate the internal resistance R_{i} and the source voltage U_{rs} of an equivalent linear voltage source on the connectors A and B .
 $R_1=5.0 \text{ } \Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \text{ } \Omega$, $I_4=4.2 \text{ A}$,
 $R_5=10 \text{ } \Omega$, $R_6=7.5 \text{ } \Omega$, $R_7=15 \text{ } \Omega$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :



Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{7}$$

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5}$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \Omega \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega}$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

d

Exercise E1 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. The graph shows the temperature dependence of the resistance of a resistor. The resistor has a resistance of $10 \text{ k}\Omega$ at 25°C . Calculate the resistance of the thermistor at -40°C .

Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

The temperature inside the refrigeration system can reach down to -40°C .

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

Resistance of the resistor R depends on the temperature T and the heat Q . Therefore, a solution is to use a heat pump up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

with $\Delta T = T_{\text{end}} - T_{\text{start}}$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right)$$

d

Exercise E2 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage \underline{u} and the phasor current \underline{i} in the circuit shown in the figure. The components R and X_L shall be given.

After analysis, the following phasors shall be determined: \underline{u} and \underline{i} in the circuit. The voltage \underline{u} shall be given in the form $\underline{u} = \hat{u} \cdot e^{j(\omega t + \varphi)}$ and the current \underline{i} in the form $\underline{i} = \hat{i} \cdot e^{j(\omega t + \varphi)}$.

Solution
.. Calculate the physical values of the components.
Solution $\underline{u} = 10 \sqrt{2} \cdot e^{j(\omega t + \varphi)}$ and $\underline{i} = 10 \sqrt{2} \cdot e^{j(\omega t + \varphi)}$

Solution
$$\underline{u} = \frac{\underline{U}}{\underline{Z}} \parallel \underline{u} = \{50 \text{ V} \cdot e^{j(\omega t + \varphi)}\} \parallel \underline{u} = \{50 \text{ V} \cdot e^{j(\omega t + \varphi)}\}$$

The current and voltage are in phase since the circuit is purely resistive.
resulting $\underline{u} = 0.24 \cdot \underline{u} \parallel \underline{u} = \{0.24 \cdot 50 \text{ V} \cdot e^{j(\omega t + \varphi)}\} \parallel \underline{u} = \{12 \text{ V} \cdot e^{j(\omega t + \varphi)}\}$
The voltage \underline{u} shall be given in the form $\underline{u} = \hat{u} \cdot e^{j(\omega t + \varphi)}$ and the current \underline{i} in the form $\underline{i} = \hat{i} \cdot e^{j(\omega t + \varphi)}$.
$$\underline{u} = 12 \sqrt{2} \cdot e^{j(\omega t + \varphi)}$$

The phase φ shall be calculated as $\varphi = \arctan\left(\frac{\text{Im}(\underline{u})}{\text{Re}(\underline{u})}\right) = \arctan\left(\frac{-4.68}{0.24}\right) = -10.8^\circ$
With the complex part comes the complex value $\underline{u} = 12 \sqrt{2} \cdot e^{j(\omega t - 10.8^\circ)}$
$$\underline{u} = 12 \sqrt{2} \cdot e^{j(\omega t - 10.8^\circ)}$$

The phase φ shall be calculated as $\varphi = \arctan\left(\frac{\text{Im}(\underline{u})}{\text{Re}(\underline{u})}\right) = \arctan\left(\frac{-4.68}{0.24}\right) = -10.8^\circ$

d

Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage \underline{u} and the phasor current \underline{i} in the circuit shown in the figure. The components R and X_L shall be given. The voltage source $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$ V is connected to a series combination of a resistor of $30 \mu\Omega$ and a capacitor of $30.22 \mu\text{F}$, all in series.


Solution
Result
.. Draw the circuit diagram of the given circuit. Label all components, voltages, and currents.

```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot f \cdot C} \quad \omega = 2\pi \cdot 15 \\
\text{Winkel } \varphi &= \arctan\left(\frac{X_L}{X_C}\right) = \arctan\left(\frac{2\pi \cdot f \cdot L}{\frac{1}{2\pi \cdot f \cdot C}}\right) \\
\end{align*}
\begin{align*} Z &= \sqrt{R^2 + (X_L - X_C)^2} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot f \cdot C} \quad \omega = 2\pi \cdot 15 \\
&\sim \text{kHz} \cdot 330 \sim \mu\text{H} \\
\end{align*}
\begin{align*} \underline{Z} &= R + \underline{Z}_L + \underline{Z}_C \quad \underline{Z} = R + j \\
&\cdot \underline{Z}_L - j \cdot \underline{Z}_C \quad \underline{Z} = R + j \cdot (\underline{Z}_L - \underline{Z}_C) \\
|\underline{Z}| &= \sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2} \\
\end{align*}

```

□□□□□□□□ □510...

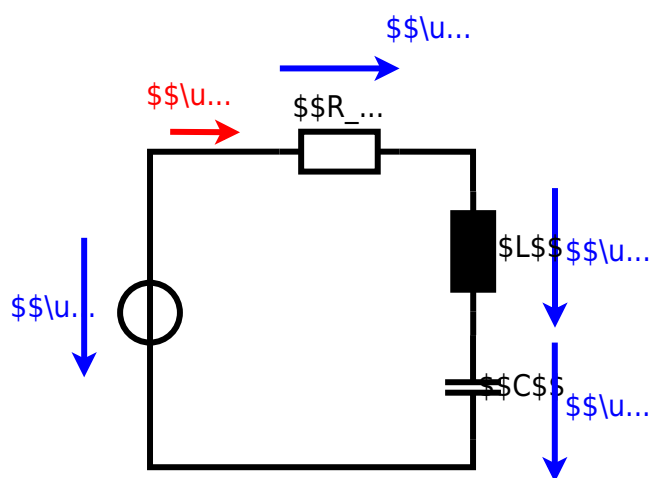

d

Exercise E3 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $Z = R + j\omega L$
 A parallel circuit means that the voltage is the same on R and C .
 The equivalent impedance for R and C combined is given by $Z = \frac{R \cdot j\omega C}{1 + \omega^2 R^2 C^2}$
 The resulting current of the parallel circuit is given as: $I = \frac{U}{Z}$
 Back to the first formula: $R \cdot I = X \cdot I \cdot \frac{I}{I} = X \cdot I \cdot \frac{I}{I} = X \cdot I \cdot \frac{I}{I}$

Solution

$R_1 = 1.00 \cdot \omega$

$R_2 = 10.0 \cdot \omega$

A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $Z = R + j\omega L$
 A parallel circuit means that the voltage is the same on R and C .
 The equivalent impedance for R and C combined is given by $Z = \frac{R \cdot j\omega C}{1 + \omega^2 R^2 C^2}$
 The resulting current of the parallel circuit is given as: $I = \frac{U}{Z}$
 Back to the first formula: $R \cdot I = X \cdot I \cdot \frac{I}{I} = X \cdot I \cdot \frac{I}{I} = X \cdot I \cdot \frac{I}{I}$

d

Exercise E4 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element is used to heat the wire with a temperature of 1800 K .
 The power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary.
 Calculate the current I needed to operate it.
 The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \cdot \omega \text{ m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .
 Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad | \quad R &= \rho \cdot \frac{l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

d

Exercise E5 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance of the battery. The voltage across the capacitor is again $U_c(t_2)$ at the moment $t_2 = 1 \text{ ms}$ after closing the switch.

Solution
Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution
The ideal voltage source U and the internal resistance R_1 are in series. On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .




The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

- .. First do not consider the light bulb - it is not connected to the RC circuit.
- Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

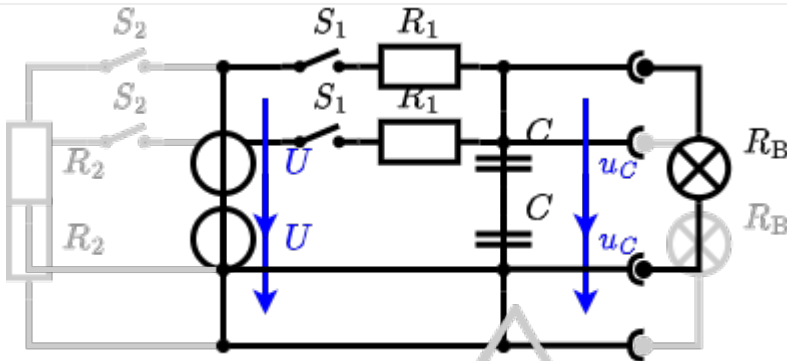

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_C(t_1) = 0.5 \cdot U$:

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with U , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$
 The internal resistance is given by substituting the ideal voltage source with its resistance ($= 0 \Omega$, short-circuit).
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms} / (10 \Omega \cdot 100 \mu\text{F})})$$


d

Exercise E6 Pure Resistor Network Simplification
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0.10 A. On the left, $R_1 = R_2 = 10 \Omega$ and $R_3 = 10 \Omega$ and the voltage source $U = 10 \text{ V}$.
 Result: $I = 0.5 \text{ A}$.

Solution

$R_2 = R_3 = 100 \Omega$

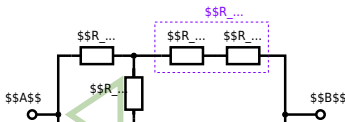

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

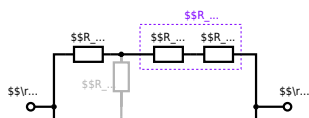

The equivalent resistor is given by a parallel configuration of resistors in series:


$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

d

**Exercise E3 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

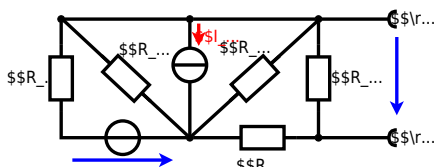


Calculate the internal resistance R_i and the source voltage U_s of an equivalent linear voltage source on the connectors A and B .
 $R_1=5.0 \text{ } \Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \text{ } \Omega$, $I_4=4.2 \text{ A}$,
 $R_5=10 \text{ } \Omega$, $R_6=7.5 \text{ } \Omega$, $R_7=15 \text{ } \Omega$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

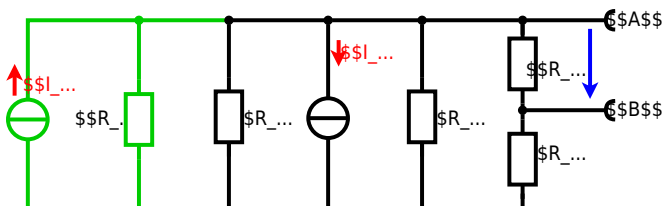

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{71356}$$

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left(\frac{U_2}{R_1} - I_4 \right) \cdot \left(\frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right)$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \left(\frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot \left(\frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

d

Exercise E2 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. The given diagram shows a temperature sensitive resistor with a negative temperature coefficient. The resistor has a resistance of $10 \text{ k}\Omega$ at 25°C and $2.5 \text{ k}\Omega$ at 40°C . Your answer.

Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

Result The temperature inside the refrigeration system can reach down to -40°C .

$$R = 6.5 \text{ k}\Omega \text{ at } -40^\circ\text{C}$$

Resistor transfer resistor $P = U^2 / R$ and $Q = P \cdot t$. Therefore, a solution is to use a heat pump up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

with $\Delta T = T_{\text{end}} - T_{\text{start}}$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

d

Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage \underline{U} and the phasor current \underline{I} in the circuit shown in the figure. The components R and X_L shall be given.

After analysis, the following phasors can be determined: $\underline{U} = 48.2 \angle -19.8^\circ \text{ V}$ and $\underline{I} = 19.8 \angle -19.8^\circ \text{ A}$.
Solution

1. Calculation of the physical values of the components.
Solution $R = 10 \Omega$, $X_L = 20 \Omega$, $X_C = 10 \Omega$

Solution
$$\underline{U} = \underline{I} \cdot \underline{Z} = \underline{I} \cdot (R + jX_L - jX_C) = \underline{I} \cdot (10 + j10 - j10) = \underline{I} \cdot 10$$

The current \underline{I} is determined by the voltage source $\underline{U}_s = 50 \angle 0^\circ \text{ V}$ and the total impedance $\underline{Z} = 10 \Omega$.
$$\underline{I} = \frac{\underline{U}_s}{\underline{Z}} = \frac{50 \angle 0^\circ}{10} = 5 \angle 0^\circ \text{ A}$$

The voltage \underline{U} across the resistor is $\underline{U} = \underline{I} \cdot R = 5 \angle 0^\circ \cdot 10 = 50 \angle 0^\circ \text{ V}$.
With the complex part $\cos(\omega t - 19.8^\circ)$ and $\sin(\omega t - 19.8^\circ)$ we get
$$u(t) = 50 \cos(\omega t - 19.8^\circ) \text{ V}$$

The phase φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{0}{10}\right) = 0^\circ$.

d

Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage \underline{U} and the phasor current \underline{I} in the circuit shown in the figure. The components R and X_L shall be given.
Result
The voltage source is $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t) \text{ V}$.
This linear source is connected with an inductor of $330 \mu\text{H}$ and a capacitor of $30.22 \mu\text{F}$, all in series.

Solution
Result
1. Draw the circuit diagram of the given circuit.
Label all components, voltages, and currents.
$$\underline{Z} = 107.31 \angle 19.8^\circ \Omega$$

$$\underline{U} = 48.2 \angle -19.8^\circ \text{ V}$$

$$\underline{I} = 19.8 \angle -19.8^\circ \text{ A}$$

```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot f \cdot C} \quad \omega = 2\pi \cdot 15 \\
\text{Winkel } \varphi &= \arctan\left(\frac{X_L}{X_C}\right) = \arctan\left(\frac{30 \cdot \omega}{19.28 \cdot \omega}\right) \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot f \cdot C} \quad \omega = 2\pi \cdot 15 \\
&\sim \text{kHz} \cdot 330 \cdot \mu\text{H} \\
\end{align*}
\begin{align*} \underline{Z} &= R + \underline{Z}_L + \underline{Z}_C \quad \underline{Z} = R + j \\
&\cdot Z_L - j \cdot Z_C \quad \underline{Z} = R + j \cdot (Z_L - Z_C) \\
|\underline{Z}| &= \sqrt{R^2 + (Z_L - Z_C)^2} \\
\end{align*}

```

□□□□□□□□ □510...



d

Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit with three resistors $R_1=247 \Omega$, $R_2=47 \Omega$ and $R_3=100 \Omega$ is connected to an AC voltage source $U_{eff}=100 \text{ V}$. The current I_{eff} through the circuit is $I_{eff}=0.1 \text{ A}$. The voltage U_{R_1} across R_1 is $U_{R_1}=24.7 \text{ V}$. The voltage U_{R_2} across R_2 is $U_{R_2}=4.7 \text{ V}$. The voltage U_{R_3} across R_3 is $U_{R_3}=10 \text{ V}$. The voltage U_{C_1} across a capacitor $C_1=40 \text{ nF}$ is $U_{C_1}=40 \text{ V}$ at $f_1=4 \text{ MHz}$.

Solution

$R_1 = 247 \Omega$
 $R_2 = 47 \Omega$
 $R_3 = 100 \Omega$
 $C_1 = 40 \text{ nF}$
 $f_1 = 4 \text{ MHz}$
 $U_{eff} = 100 \text{ V}$
 $I_{eff} = 0.1 \text{ A}$
 $U_{R_1} = 24.7 \text{ V}$
 $U_{R_2} = 4.7 \text{ V}$
 $U_{R_3} = 10 \text{ V}$
 $U_{C_1} = 40 \text{ V}$

A series circuit means that the current is constant on every component.
 The equivalent impedance for R_1 and R_2 combined is given by $Z_{R1R2} = R_1 + R_2 = 247 \Omega + 47 \Omega = 294 \Omega$.
 The equivalent impedance for R_3 and C_1 combined is given by $Z_{R3C1} = R_3 + X_{C1} = 100 \Omega - jX_{C1}$.
 The total impedance is $Z_{total} = Z_{R1R2} + Z_{R3C1} = 294 \Omega - jX_{C1}$.
 The current is $I_{eff} = \frac{U_{eff}}{Z_{total}} = \frac{100 \text{ V}}{294 \Omega - jX_{C1}} = 0.1 \text{ A}$.
 The voltage across R_1 is $U_{R1} = I_{eff} \cdot R_1 = 0.1 \text{ A} \cdot 247 \Omega = 24.7 \text{ V}$.
 The voltage across R_2 is $U_{R2} = I_{eff} \cdot R_2 = 0.1 \text{ A} \cdot 47 \Omega = 4.7 \text{ V}$.
 The voltage across R_3 is $U_{R3} = I_{eff} \cdot R_3 = 0.1 \text{ A} \cdot 100 \Omega = 10 \text{ V}$.
 The voltage across C_1 is $U_{C1} = I_{eff} \cdot X_{C1} = 0.1 \text{ A} \cdot X_{C1} = 40 \text{ V}$.
 The reactance $X_{C1} = \frac{U_{C1}}{I_{eff}} = \frac{40 \text{ V}}{0.1 \text{ A}} = 400 \Omega$.
 The capacitance $C_1 = \frac{1}{2\pi f X_{C1}} = \frac{1}{2\pi \cdot 4 \text{ MHz} \cdot 400 \Omega} = 40 \text{ nF}$.

d

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

A heating element made of nichrome wire with a diameter of $d = 0.357 \text{ mm}$ and a length of $l = 3.57 \text{ m}$ is connected to a power source of $U = 100 \text{ V}$. The power dissipation is $P = 40 \text{ W}$. Calculate the resistance R of the heating element.

Solution

$U = 100 \text{ V}$
 $P = 40 \text{ W}$
 $d = 0.357 \text{ mm}$
 $l = 3.57 \text{ m}$

The resistance R is given by $R = \frac{U^2}{P} = \frac{(100 \text{ V})^2}{40 \text{ W}} = 250 \Omega$.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad R &= \rho \cdot \frac{l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

d

Exercise E4 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance of the battery. The voltage across the capacitor is again $U_c(t_2)$ at the moment $t_2 = 1 \text{ ms}$ after closing the switch. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution
Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .


Solution
The ideal voltage source U is in series with the internal resistance R_1 and the external resistance R_2 . The voltage across the capacitor is $u_c(t)$. On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .



The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$. The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

... First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

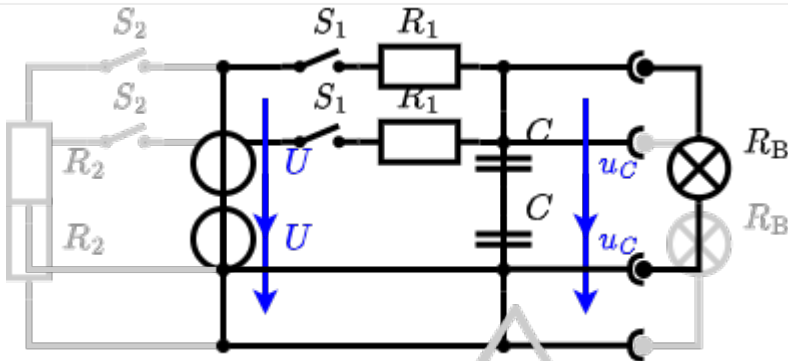

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_C(t_1) = 0.5 \cdot U$:

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$
 The internal resistance is given by substituting the ideal voltage source with its resistance ($R_i = 0 \Omega$, short-circuit).
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms} / (10 \Omega \cdot 100 \mu\text{F})})$$


d

Exercise E3 Pure Resistor Network Simplification
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0.01 sec, $R_1 = R_2 = R_3 = 10 \Omega$ and the voltage between B and C shall be given.

Solution

$R_2 = R_3 = 100 \Omega$

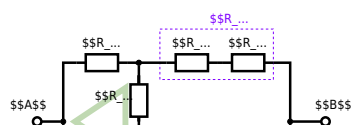

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

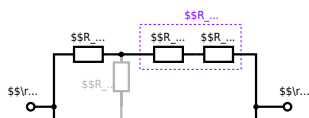

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = \{500 \sim \Omega \parallel (200 \sim \Omega) \parallel R_{\text{eq}} = \{500 \sim \Omega \cdot 200 \sim \Omega \} \over {500 \sim \Omega + 200 \sim \Omega} \}$$

From: <https://mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link: https://mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1678504982

Last update: 2023/03/11 04:23

