

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	3
Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	6
Exercise E2 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	7
Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	7
Exercise E3 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	11
Exercise E4 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	11
Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	12
Exercise E6 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	13
Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	15
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	19
Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	20
Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	20
Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	24
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	24
Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,	


WS2022) 25
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute
written test, WS2022) 26

d

**Exercise E1 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result

$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \text{ } \Omega \end{aligned}$$

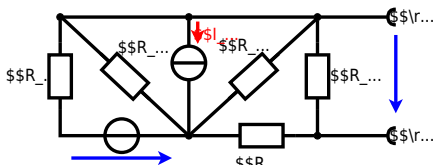

Calculate the internal resistance R_{i} and the source voltage U_{rs} of an equivalent linear voltage source on the connectors A and B .
 $R_1=5.0 \text{ } \Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \text{ } \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \text{ } \Omega$, $R_6=7.5 \text{ } \Omega$, $R_7=15 \text{ } \Omega$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :



Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{67}$$

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left(\frac{U_2}{R_1} - I_4 \right) \cdot \left(\frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right)$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \left(\frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot \left(\frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

d

Exercise E1 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. The graph shows the temperature dependence of the resistance of a resistor. The resistor has a resistance of $10 \text{ k}\Omega$ at 25°C . Calculate the resistance of the thermistor at -40°C .

Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

The temperature inside the refrigeration system can reach down to -40°C .

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

Resistor transfer resistor R and R_0 are in the circuit and U is constant. Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

with $\Delta T = T_{\text{end}} - T_{\text{start}}$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

d

Exercise E2 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage \underline{u} (in V) at $t = 30 \text{ ms}$ for the circuit shown in the figure. The components R and X_L shall be given.

After analysis, the following phasor voltage \underline{u} is extracted: $\underline{u} = 10 \sqrt{2} \cos(\omega t - 45^\circ) \text{ V}$.
Solution

.. Calculate the physical values of the components.
Solution $R = 10 \sqrt{2} \cos(45^\circ) = 14.14 \text{ } \Omega$ and $X_L = 10 \sqrt{2} \sin(45^\circ) = 14.14 \text{ } \Omega$

Solution
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{4.68 \angle -20.9^\circ} = 10.68 \angle 20.9^\circ \text{ A}$$

The current $i(t)$ is $i(t) = 10.68 \sqrt{2} \cos(\omega t + 20.9^\circ) \text{ A}$
At $t = 30 \text{ ms}$, $\omega t = 2\pi \cdot 150 \cdot 0.03 = 5.65 \text{ rad}$
$$i(30 \text{ ms}) = 10.68 \sqrt{2} \cos(5.65 + 20.9^\circ) = 10.68 \sqrt{2} \cos(6.14 \text{ rad}) = 10.68 \sqrt{2} \cdot (-0.99) = -15.0 \text{ A}$$

The voltage $u(t)$ is $u(t) = 10 \sqrt{2} \cos(\omega t - 45^\circ) \text{ V}$
At $t = 30 \text{ ms}$, $\omega t = 5.65 \text{ rad}$
$$u(30 \text{ ms}) = 10 \sqrt{2} \cos(5.65 - 45^\circ) = 10 \sqrt{2} \cos(5.16 \text{ rad}) = 10 \sqrt{2} \cdot (-0.63) = -8.9 \text{ V}$$

With the complex part $\cos(\omega t - 45^\circ) = \cos(\omega t) \cos(45^\circ) + \sin(\omega t) \sin(45^\circ)$
$$u(t) = 10 \sqrt{2} [\cos(\omega t) \cos(45^\circ) + \sin(\omega t) \sin(45^\circ)] = 10 \sqrt{2} [\cos(\omega t) \frac{\sqrt{2}}{2} + \sin(\omega t) \frac{\sqrt{2}}{2}] = 10 [\cos(\omega t) + \sin(\omega t)]$$

The phase φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{-4.68}{0.24}\right) = -10.9^\circ$

d

Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage \underline{u} (in V) at $t = 30 \text{ ms}$ for the circuit shown in the figure. The components R and X_L shall be given. The voltage source $u(t) = 3.0 \cos(2\pi \cdot 150 \cdot t) \text{ V}$.
Solution


This linear source is connected with an inductor of $330 \text{ } \mu\text{H}$ and a capacitor of $30.22 \text{ } \mu\text{F}$, all in series.
Result
.. Draw the circuit diagram of the given circuit.
Label all components, voltages, and currents.

```

Result
\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
&\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot f \cdot C} \quad \omega = 2\pi \cdot 15 \\
\text{Winkel } \varphi &= \arctan\left(\frac{X_L}{X_C}\right) = \arctan\left(\frac{2\pi \cdot f \cdot L}{\frac{1}{2\pi \cdot f \cdot C}}\right) \\
&= \arctan(2\pi \cdot f \cdot L \cdot C) \\
&= \arctan(2\pi \cdot 15 \cdot 10^{-3} \cdot 10^{-6}) \\
&= \arctan(9.42 \cdot 10^{-5}) \approx 0.000942 \text{ rad} \\
&\approx 0.054^\circ \\
&\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot f \cdot C} \quad \omega = 2\pi \cdot 15 \\
&\sim \text{kHz} \cdot 330 \sim \mu\text{H} \\
&\end{align*}
\begin{align*} \underline{Z} &= R + \underline{Z}_L + \underline{Z}_C \quad \underline{Z} = R + j \\
&\cdot \underline{Z}_L - j \cdot \underline{Z}_C \quad \underline{Z} = R + j \cdot (\underline{Z}_L - \underline{Z}_C) \\
|\underline{Z}| &= \sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2} \\
&\end{align*}

```

□□□□□□□□ □510...

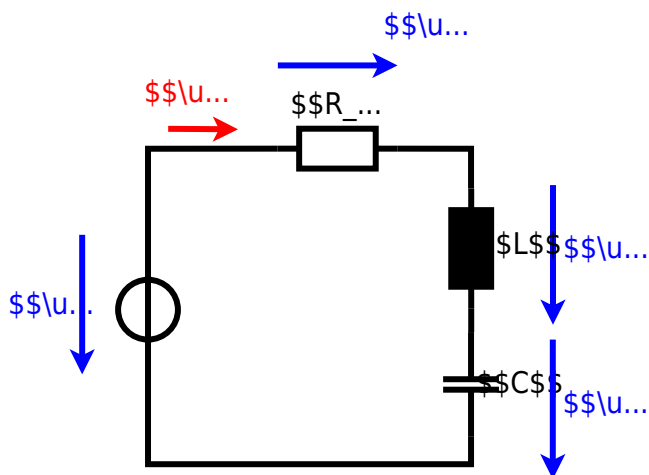

d

Exercise E3 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $Z = R + j\omega L$.
 A parallel circuit means that the voltage is the same on R and C .
 The equivalent impedance for R and C combined is given by $Z = \frac{R \cdot j\omega C}{1 + \omega^2 R^2 C^2}$.
 The resulting current of the parallel circuit is given as: $I = \frac{U}{Z}$.

Solution

$R_1 = 1.00 \cdot \omega$

$R_2 = 10.0 \cdot \omega$

A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $Z = R + j\omega L$.
 A parallel circuit means that the voltage is the same on R and C .
 The equivalent impedance for R and C combined is given by $Z = \frac{R \cdot j\omega C}{1 + \omega^2 R^2 C^2}$.
 The resulting current of the parallel circuit is given as: $I = \frac{U}{Z}$.

Therefore, the resulting current of the parallel circuit is given as: $I = \frac{U}{Z}$.

Back to the first formula: $R_3 \cdot I_{R3} = X_{C3} \cdot I_{C3}$

$R_3 = X_{C3} \cdot \frac{I_{C3}}{I_{R3}}$

$R_3 = \frac{1}{\omega C} \cdot \frac{I_{C3}}{I_{R3}}$

$R_3 = \frac{1}{\omega C} \cdot \frac{\sqrt{I_{R3}^2 - I_{L3}^2}}{I_{R3}}$

$R_3 = \frac{1}{\omega C} \cdot \frac{\sqrt{I_{R3}^2 - (I_{R3} \cdot \omega L)^2}}{I_{R3}}$

$R_3 = \frac{1}{\omega C} \cdot \frac{\sqrt{1 - \omega^2 L^2}}{\omega L}$

$R_3 = \frac{1}{\omega^2 L C} \cdot \sqrt{1 - \omega^2 L^2}$

$R_3 = \frac{1}{\omega^2 L C} \cdot \sqrt{1 - \omega^2 L^2}$

$R_3 = \frac{1}{\omega^2 L C} \cdot \sqrt{1 - \omega^2 L^2}$

d

Exercise E4 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element is used to heat the wire with a temperature of 180°C .
 The power dissipation (= heat flow) of $P=40 \text{ W}$ is necessary.
 Calculate the current I needed to operate it.
 The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \cdot \Omega \cdot \text{m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

Solution

$R = \frac{\rho \cdot L}{A}$

$R = \frac{1.10 \cdot 10^{-6} \cdot 3}{\pi \cdot (1.785 \cdot 10^{-3})^2}$

$R = 1.10 \cdot 10^{-6} \cdot 3 \cdot \frac{1}{\pi \cdot (1.785 \cdot 10^{-3})^2}$

$R = 1.10 \cdot 10^{-6} \cdot 3 \cdot \frac{1}{\pi \cdot 3.186 \cdot 10^{-6}}$

$R = 1.10 \cdot 10^{-6} \cdot 3 \cdot \frac{1}{1.008 \cdot 10^{-5}}$

$R = 1.10 \cdot 10^{-6} \cdot 3 \cdot 9.92 \cdot 10^4$

$R = 1.10 \cdot 10^{-6} \cdot 2.976 \cdot 10^5$

$R = 0.327 \cdot \Omega$

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

d

Exercise E5 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance R_1 of the battery. The capacitor is initially uncharged. The switch S_1 is closed at $t_0 = 0 \text{ s}$ and the voltage across the capacitor is again $U_c(t_2) = 0.5 \cdot U$ at the moment $t_2 = 1 \text{ ms}$ after closing the switch. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution
Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution
The ideal voltage source U and the internal resistance R_1 can be replaced by an equivalent voltage source $U_{eq} = U \cdot \frac{R_2}{R_1 + R_2}$ and an internal resistance $R_{eq} = R_1 \cdot \frac{R_2}{R_1 + R_2}$.
On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .




The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

- .. First do not consider the light bulb - it is not connected to the RC circuit.
- Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

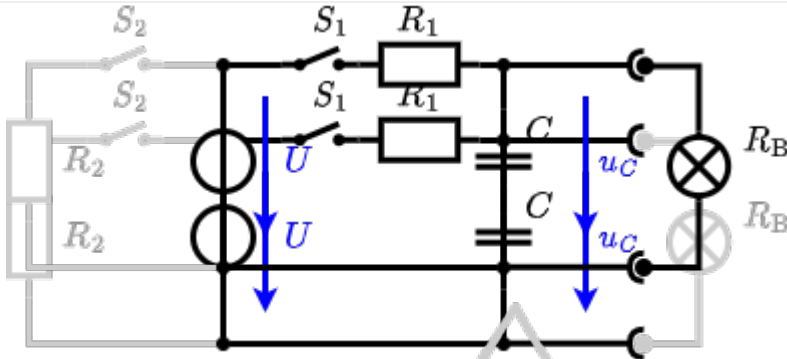

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_C(t_1) = 0.5 \cdot U$:

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$ The internal resistance is given by substituting the ideal voltage source with its resistance ($R_i = 0 \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms}/(10 \Omega \cdot 100 \mu\text{F})})$$


d

Exercise E6 Pure Resistor Network Simplification
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0.10 A. On the left, $R_1 = R_2 = 10 \Omega$ and $R_3 = 10 \Omega$ and the voltage source $U = 10 \text{ V}$. The result is given in R_B .

Solution

R_{eq} between A and B

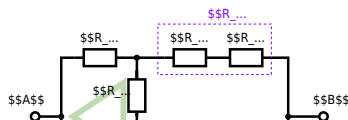

Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

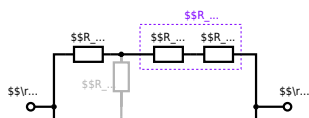

The equivalent resistor is given by a parallel configuration of resistors in series:


$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

d

**Exercise E3 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result


$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

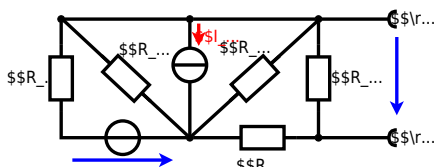


Calculate the internal resistance R_{int} and the source voltage U_s of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3=10 \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$. Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

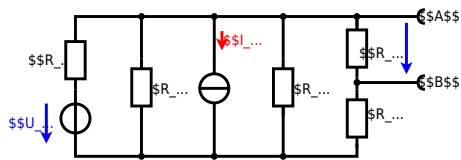

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

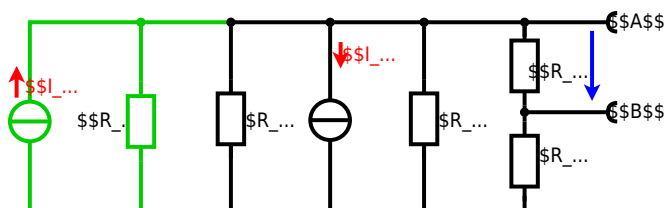

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135} + U_{24}$$

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left(\frac{U_2}{R_1} - I_4 \right) \cdot \left(\frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right)$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \left(\frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot \left(\frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

d

Exercise E2 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. The graph shows the temperature dependence of the resistance of a resistor. The resistor has a resistance of $10 \text{ k}\Omega$ at 25°C . Calculate the resistance of the thermistor at -40°C .

Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

The temperature inside the refrigeration system can reach down to -40°C .

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

Resistor transfer resistor $P = U \cdot I$ and $P = \frac{U^2}{R}$. Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

with $\Delta T = T_{\text{end}} - T_{\text{start}}$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

d

Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage \underline{u} (in V) at $t = 30$ ms for the circuit in the figure. The components R and X_L shall be given.

After analysis, the following phasor voltage \underline{u} is extracted: $\underline{u} = 4.68 \angle -90^\circ$ V. In the time domain, the voltage is $u(t) = 4.68 \sin(2\pi \cdot 1500 t - 90^\circ)$ V.

.. Calculate the physical values of the components. Solution: $R = 10 \Omega$, $X_L = 20 \Omega$.

Solution:
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{4.68 \angle -90^\circ} = 10.68 \angle 90^\circ$$
 The current $i(t) = 10.68 \sin(2\pi \cdot 1500 t + 90^\circ)$ A. The voltage $u(t) = 4.68 \sin(2\pi \cdot 1500 t - 90^\circ)$ V. With the complex part comes the complex value $\underline{Z} = 4.68 \angle -90^\circ$ Ω . The phase φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{-4.68}{0.24}\right) = -90^\circ$.

d

Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage \underline{u} (in V) at $t = 30$ ms for the circuit in the figure. The components R and X_L shall be given. The voltage source is $u(t) = 3.0 \sin(2\pi \cdot 1500 t)$ V.

This linear source is connected with an inductor of $330 \mu\text{H}$ and a capacitor of $30.22 \mu\text{F}$, all in series.


.. Draw the circuit diagram of the given circuit. Label all components, voltages, and currents. Solution: $\underline{Z} = 19.8 \angle -90^\circ \Omega$.

```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot f \cdot C} \quad \omega = 2\pi \cdot 15 \\
\text{Winkel } \varphi &= \arctan\left(\frac{X_L}{X_C}\right) = \arctan\left(\frac{30 \cdot \omega}{19.28 \cdot \omega}\right) \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot f \cdot C} \quad \omega = 2\pi \cdot 15 \\
&\sim \text{kHz} \cdot 330 \cdot \mu\text{H} \\
\end{align*}
\underline{Z} = R + \underline{Z}_L + \underline{Z}_C \quad \underline{Z} = R + j \\
\cdot \underline{Z}_L - j \cdot \underline{Z}_C \quad \underline{Z} = R + j \cdot (\underline{Z}_L - \underline{Z}_C) \quad |\underline{Z}| = \\
\sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2}
\end{align*}

```

□□□□□□□□ □510...

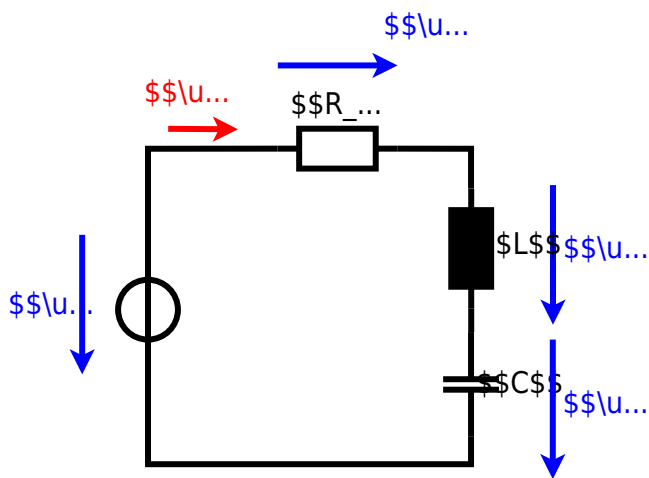

d

Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $Z = \sqrt{R^2 + X_L^2}$
 Parallel circuit means that the voltage is the same on R_1 and C_1
 The equivalent impedance for R and C combined is given by $Z = \frac{R \cdot X_C}{\sqrt{R^2 + X_C^2}}$
 A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $Z = \sqrt{R^2 + X_L^2}$
 Parallel circuit means that the voltage is the same on R_1 and C_1
 The equivalent impedance for R and C combined is given by $Z = \frac{R \cdot X_C}{\sqrt{R^2 + X_C^2}}$

Solution

$R_1 = 1.00 \cdot \Omega$

$R_2 = 10.0 \cdot \Omega$

A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $Z = \sqrt{R^2 + X_L^2}$
 Parallel circuit means that the voltage is the same on R_1 and C_1
 The equivalent impedance for R and C combined is given by $Z = \frac{R \cdot X_C}{\sqrt{R^2 + X_C^2}}$
 A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $Z = \sqrt{R^2 + X_L^2}$
 Parallel circuit means that the voltage is the same on R_1 and C_1
 The equivalent impedance for R and C combined is given by $Z = \frac{R \cdot X_C}{\sqrt{R^2 + X_C^2}}$

d

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element is used to heat the wire with a temperature of 1800 K .
 Result: power dissipation (= heat flow) of $P=40 \text{ W}$ is necessary.
 Calculate the current I needed to operate for heating elements.
 The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \cdot \Omega \cdot \text{m}$.
 The heating element is 3 m long and has a diameter of 3.57 mm .
 Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad | \quad R &= \rho \cdot \frac{l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

d

Exercise E4 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance R_1 of the battery. The capacitor C is initially charged to a voltage $U_0 = 20 \text{ V}$. The voltage across the capacitor is again U_0 at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution
Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution
The ideal voltage source U is in series with the internal resistance R_1 and the external resistance R_2 . The voltage across the capacitor is $u_c(t) = U \cdot \exp(-t/\tau)$, where $\tau = (R_1 + R_2) \cdot C$.
On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .




The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

- 1. First do not consider the light bulb - it is not connected to the RC circuit.
- 2. Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

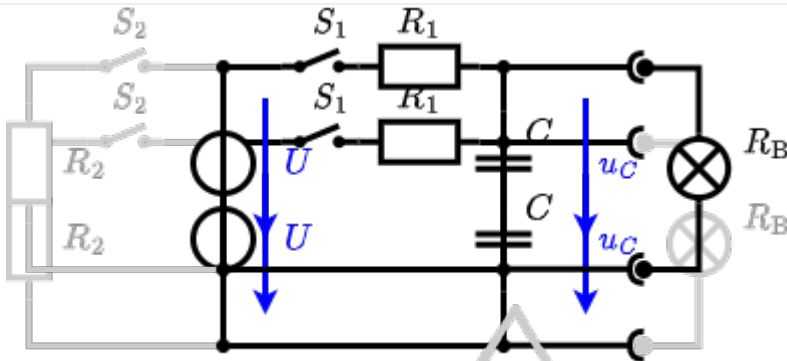

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_C(t_1) = 0.5 \cdot U$:

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with U , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$
 The internal resistance is given by substituting the ideal voltage source with its resistance ($\rightarrow 0 \Omega$, short-circuit).
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms} / (10 \Omega \cdot 100 \mu\text{F})})$$


d

Exercise E3 Pure Resistor Network Simplification
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall hold with $R_1 = 200 \Omega$ and $R_2 = R_3 = 100 \Omega$ and the voltage source $U = 10 \text{V}$.
 Result: R_B .

Solution

R_{eq} (transfer function) $\omega = 100 \text{ rad/s}$

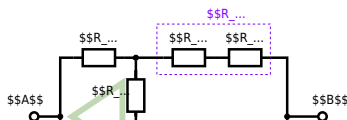

Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

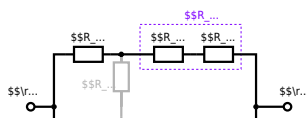

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = \{500 \sim \Omega \parallel (200 \sim \Omega) \parallel R_{\text{eq}} = \{500 \sim \Omega \cdot 200 \sim \Omega \} \over {500 \sim \Omega + 200 \sim \Omega} \}$$

From: <https://mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link: https://mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1680087384

Last update: 2023/03/29 12:56

