

# Exam Winter Semester 2022

## Student Group

First Name	Surname	Matrikel Nr.

## Table of Contents

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) .....	3
Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) .....	6
Exercise E2 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) .....	7
Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) .....	7
Exercise E3 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) .....	11
Exercise E4 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) .....	11
Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) .....	12
Exercise E6 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) .....	13
Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) .....	15
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) .....	19
Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) .....	20
Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) .....	20
Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) .....	24
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) .....	24
Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,	

WS2022) ..... 25


Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute  
written test, WS2022) ..... 26

start

**Exercise E1 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result


$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \text{ } \Omega \end{aligned}$$

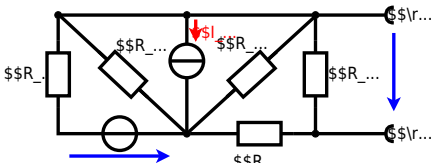


Calculate the internal resistance  $R_{\text{i}}$  and the source voltage  $U_{\text{rs}}$  of an equivalent linear voltage source on the connectors  $\text{A}$  and  $\text{B}$ . 
$$R_1=5.0 \text{ } \Omega, \quad U_2=6.0 \text{ V}, \quad R_3= 10 \text{ } \Omega, \quad I_4=4.2 \text{ A}, \quad R_5=10 \text{ } \Omega, \quad R_6=7.5 \text{ } \Omega, \quad R_7=15 \text{ } \Omega$$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

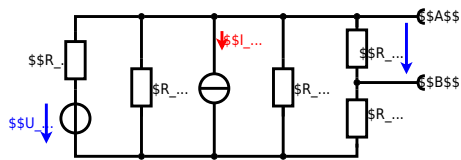

The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

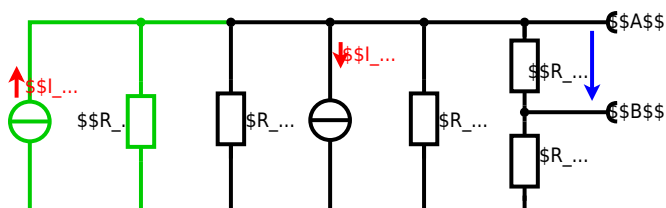

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following:

$$U_{24} = I_{24} \cdot R_{67}$$

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left( \frac{U_2}{R_1} - I_4 \right) \cdot \left( \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right)$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \left( \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot \left( \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

endstart

**Exercise E1 Temperature-dependent Resistance**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

2. The diagram shows a circuit with a resistor  $R$  and a voltage source  $U$ . The resistor has a temperature-dependent resistance  $R(T)$ . The voltage source has a constant voltage  $U = 10 \text{ V}$ . The resistor has a resistance  $R_0 = 10 \text{ k}\Omega$  at  $T_0 = 25^\circ\text{C}$ . The temperature coefficient of resistance is  $\alpha = 0.01 \text{ K}^{-1}$  and the temperature coefficient of resistance squared is  $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$ . Calculate the resistance  $R$  at  $T = -40^\circ\text{C}$ .

Result:  $R = 6.5 \text{ k}\Omega$  at  $T = -40^\circ\text{C}$ .

The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

Resistance of the resistor  $R$  depends on the temperature  $T$  and the heat  $Q$ . Therefore, a solution is to use a heat sink up the refrigeration system.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

with  $\Delta T = T_{\text{end}} - T_{\text{start}}$

$$R = 10 \text{ k}\Omega \cdot \left( 1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

endstart

### Exercise E2 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage  $\underline{U}$  and the phasor current  $\underline{I}$  in the circuit shown in the figure. The components  $R$  and  $X_L$  shall be given.

After analysis, the following phasors shall be determined:  $\underline{U}$  and  $\underline{I}$  in the circuit. The phasors shall be given in the form  $\underline{U} = U \cdot e^{j(\omega t + \varphi)}$  and  $\underline{I} = I \cdot e^{j(\omega t + \varphi)}$ .

Solution  
.. Calculation of the phasor voltage  $\underline{U}$  and the phasor current  $\underline{I}$  in the circuit. The phasors shall be given in the form  $\underline{U} = U \cdot e^{j(\omega t + \varphi)}$  and  $\underline{I} = I \cdot e^{j(\omega t + \varphi)}$ .

Solution  
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \text{with } \underline{Z} = R + j\omega L + \frac{1}{j\omega C}$$
  
The current and voltage are in phase since the circuit is purely resistive.  
The voltage  $\underline{U}$  is  $U = 50 \text{ V}$  and the current  $\underline{I}$  is  $I = 0.24 \text{ A}$ .  
The phase angle  $\varphi$  is  $\varphi = \arctan\left(\frac{-4.68}{0.24}\right) = -10.9^\circ$ .  
The phasor voltage  $\underline{U}$  is  $\underline{U} = 50 \cdot e^{j(\omega t - 10.9^\circ)}$  and the phasor current  $\underline{I}$  is  $\underline{I} = 0.24 \cdot e^{j(\omega t - 10.9^\circ)}$ .

endstart

### Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage  $\underline{U}$  and the resulting phasor current  $\underline{I}$  in the circuit shown in the figure. The components  $R$  and  $X_L$  shall be given. The voltage source  $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t) \text{ V}$  and the current source  $i(t) = 0.22 \cdot \cos(2\pi \cdot 15 \cdot t) \text{ A}$  are given.

Solution  
This linear source is connected with an inductor of  $330 \mu\text{H}$  and a capacitor of  $30.22 \mu\text{F}$ , all in series.

Result  
.. Draw the circuit diagram of the given circuit. Label all components, voltages, and currents.

```


\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot f \cdot C} \quad \omega = 2\pi \cdot 15 \\
\omega &= 2\pi \cdot 15 \cdot 10^{-3} = 942 \text{ rad/s} \\
\begin{align*} I &= \frac{U}{Z} = \frac{10 \text{ V}}{\sqrt{R^2 + (Z_L - Z_C)^2}} \\
&= \frac{10}{\sqrt{30^2 + (19.28 - 0.02)^2}} \\
&= 0.33 \text{ A} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot f \cdot C} \quad \omega = 2\pi \cdot 15 \\
&\approx 330 \text{ } \mu\text{H} \\
\end{align*}
\begin{align*} \underline{Z} &= R + \underline{Z}_L + \underline{Z}_C \quad \underline{Z} = R + j \\
&\cdot Z_L - j \cdot Z_C \quad \underline{Z} = R + j \cdot (Z_L - Z_C) \\
|\underline{Z}| &= \sqrt{R^2 + (Z_L - Z_C)^2} \\
\end{align*}

```

□□□□□□□□ □510...





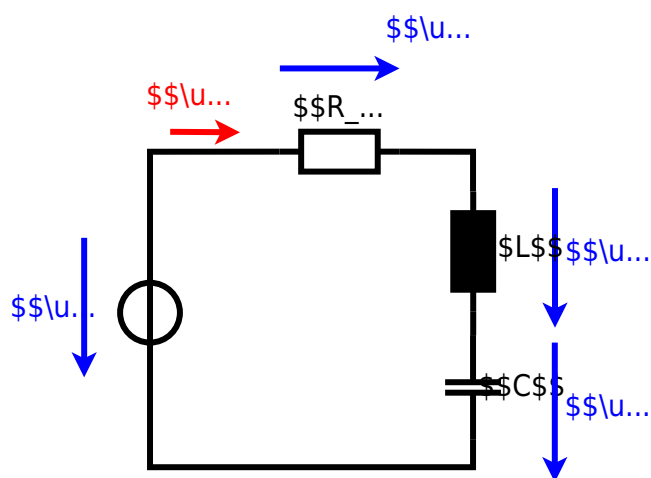

endstart

### Exercise E3 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit means that the current is constant on every component.  
 The equivalent impedance for  $R$  and  $L$  combined is given by  $Z = \sqrt{R^2 + X_L^2}$   
 Parallel circuit means that the voltage is the same on  $R_1$  and  $C_1$   
 Budget in the parallel circuit:  $X_C = \frac{1}{\omega C}$  since  $\omega$  and  $C$  are perpendicular  
 $X_C = \frac{1}{2\pi \cdot 40 \cdot 10^{-6}} = 398 \text{ } \Omega$  (It has to, since  $R_3$  is perpendicular to  $X_C$ )  
 $Z = \sqrt{R_2^2 + X_C^2} = \sqrt{100^2 + 398^2} = 410 \text{ } \Omega$   
 Therefore the resulting current of the parallel circuit is given as:  
 $I_{3C} = \frac{U}{Z} = \frac{10}{410} = 24.4 \text{ mA}$   
 Back to the first formula:  $R_3 \cdot I_{3C} = X_C \cdot I_{3C} \cdot \frac{I_{3C}}{I_{3R}}$   
 $R_3 = X_C \cdot \frac{I_{3C}}{I_{3R}} = 398 \cdot \frac{24.4}{100} = 97.1 \text{ } \Omega$

Solution

$R_1 = 100 \text{ } \Omega$

$R_2 = 100 \text{ } \Omega$

A series circuit means that the current is constant on every component.  
 The equivalent impedance for  $R$  and  $L$  combined is given by  $Z = \sqrt{R^2 + X_L^2}$   
 Parallel circuit means that the voltage is the same on  $R_1$  and  $C_1$   
 Budget in the parallel circuit:  $X_C = \frac{1}{\omega C}$  since  $\omega$  and  $C$  are perpendicular  
 $X_C = \frac{1}{2\pi \cdot 40 \cdot 10^{-6}} = 398 \text{ } \Omega$  (It has to, since  $R_3$  is perpendicular to  $X_C$ )  
 $Z = \sqrt{R_2^2 + X_C^2} = \sqrt{100^2 + 398^2} = 410 \text{ } \Omega$   
 Therefore the resulting current of the parallel circuit is given as:  
 $I_{3C} = \frac{U}{Z} = \frac{10}{410} = 24.4 \text{ mA}$   
 Back to the first formula:  $R_3 \cdot I_{3C} = X_C \cdot I_{3C} \cdot \frac{I_{3C}}{I_{3R}}$   
 $R_3 = X_C \cdot \frac{I_{3C}}{I_{3R}} = 398 \cdot \frac{24.4}{100} = 97.1 \text{ } \Omega$

endstart

### Exercise E4 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element is used to heat the wire with a temperature of  $1800 \text{ } ^\circ\text{C}$ .  
 Result power dissipation (= heat flow) of  $P=40 \text{ W}$  is necessary.  
 Calculate the current  $I$  needed to operate for heating elements.  
 The Nichrome wire has a resistivity of  $1.10 \cdot 10^{-6} \text{ } \Omega\text{m}$ .  
 The heating element is  $3 \text{ m}$  long and has a diameter of  $3.57 \text{ mm}$ .  
 Calculate the resistance  $R$  of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$


endstart

**Exercise E5 Charging Capacitors**  
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance  $r$  of the battery. The voltage across the capacitor is again  $U_c(t_0) = 0 \text{ V}$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Solution**  
Hint: To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

**Solution**  
The ideal voltage source  $U$  is in series with the internal resistance  $r$  and the resistor  $R_1$ . The voltage across the capacitor is  $u_c(t) = U \cdot (1 - e^{-t/\tau})$ , where  $\tau = (R_1 + r) \cdot C$ .  
On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .

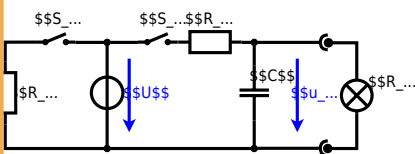


The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ } \Omega$  and a capacitor of  $C = 100 \text{ } \mu\text{F}$ .

The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first asks. At the moment  $t_0 = 0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0) = 0 \text{ V}$ .

- 1. First do not consider the light bulb - it is not connected to the RC circuit.
- 2. Calculate the point of time  $t_1$  when  $u_c(t_1) = 0.5 \cdot U$ .

Solution

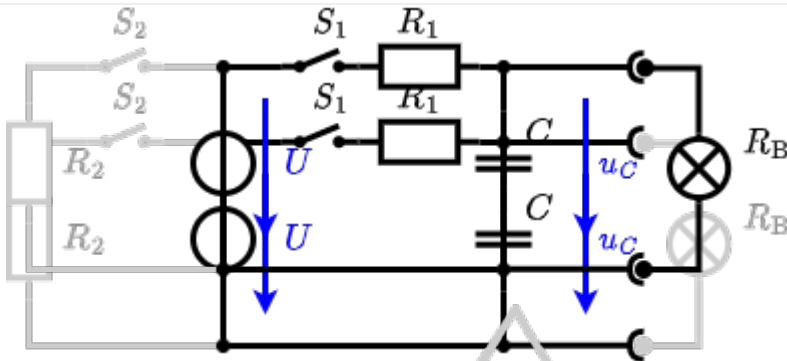


So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_C(t)$  which has to be  $u_C(t_1) = 0.5 \cdot U$ :  

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5$   

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$

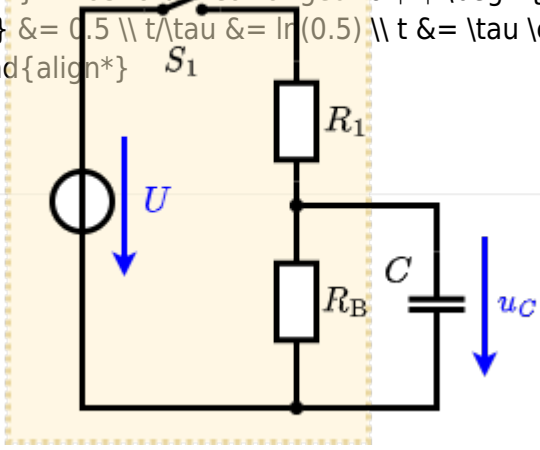

An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$   
 The internal resistance is given by substituting the ideal voltage source with its resistance ( $R_i = 0 \Omega$ , short-circuit).  
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms}/(10 \Omega \cdot 100 \mu\text{F})})$$


endstart

**Exercise E6 Pure Resistor Network Simplification**  
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0.10 A. On the left,  $R_1 = R_2 = 10 \Omega$  and  $R_3 = 10 \Omega$  and the voltage source  $U = 10 \text{ V}$ .  
 Result:  $R_B$ .

Solution

$R_2 = R_3 = 100 \Omega$

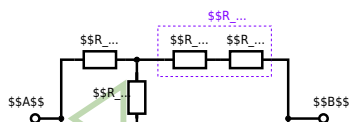

Since  $R_2 = R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between  $A$  and  $B$ .

Solution

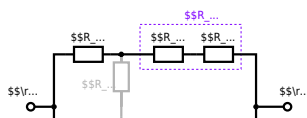

The equivalent resistor is given by a parallel configuration of resistors in series:


$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

endstart

**Exercise E3 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

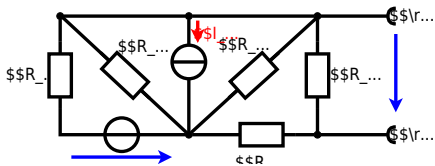


Calculated the internal resistance  $R_{int}$  and the source voltage  $U_s$  of an equivalent linear voltage source on the connectors  $A$  and  $B$ .  $R_1=5.0 \Omega$ ,  $U_s=6.0 \text{ V}$ ,  $R_3=10 \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \Omega$ ,  $R_6=7.5 \Omega$ ,  $R_7=15 \Omega$  Use equivalent sources in order to simplify the circuit!


Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



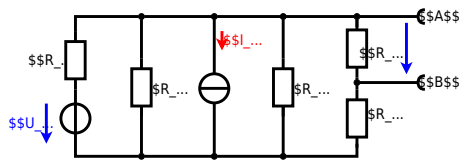

The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

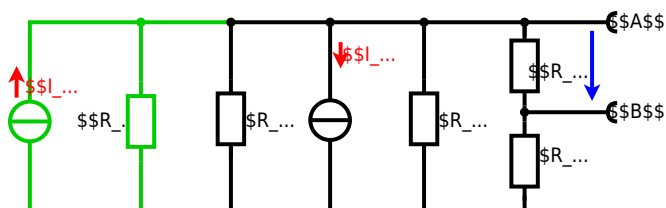

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following:

$$U_{24} = I_{24} \cdot R_{135} + I_{24} \cdot R_4 + I_{24} \cdot R_6 + I_{24} \cdot R_7$$

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left( \frac{U_2}{R_1} - I_4 \right) \cdot \left( \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right)$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \left( \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot \left( \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

endstart

**Exercise E2 Temperature-dependent Resistance**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

2. The diagram shows a circuit with a constant voltage source  $U_0$  and a resistor  $R_0$  in series with a temperature-dependent resistor  $R$ . The resistor  $R$  has a resistance of  $10 \text{ k}\Omega$  at  $25^\circ\text{C}$ . Your answer.

Its temperature coefficients are:  $\alpha = 0.01 \text{ K}^{-1}$  and  $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$ .

**Result** The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

$$R = 10 \text{ k}\Omega \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

Resistor transfer resistance  $P = U^2 / R$  and  $Q = P \cdot t$ . Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

with  $\Delta T = T_{\text{end}} - T_{\text{start}}$

$$R = 10 \text{ k}\Omega \cdot \left( 1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

endstart

### Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage  $\underline{U}$  and the phasor current  $\underline{I}$  in the circuit shown in the figure. The components  $R$  and  $X_L$  shall be given.

After analysis, the following phasors can be determined:  $\underline{U} = 48.2 \angle 19.8^\circ \text{ V}$  and  $\underline{I} = 19.8 \angle -48.2^\circ \text{ A}$ .

Solution  
.. Calculate the physical values of the components.  
Solution  $R = 10 \Omega$ ,  $X_L = 20 \Omega$

Solution  
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{10 + j20} = 1.96 \angle -63.4^\circ \text{ A}$$
  
The current and voltage are in phase since the circuit is purely resistive.  
The voltage across the capacitor is  $\underline{U}_C = \underline{I} \cdot (-j40) = -78.4 \angle -63.4^\circ \text{ V}$   
The voltage across the inductor is  $\underline{U}_L = \underline{I} \cdot j20 = 39.2 \angle -23.4^\circ \text{ V}$   
The phase angle  $\varphi$  can be calculated as  $\varphi = \arctan\left(\frac{-40}{10}\right) = -76^\circ$   
With the complex part comes the complex value  $\underline{U} = 50 \angle 0^\circ \text{ V}$   
 $\varphi = \arctan\left(\frac{X_L}{R}\right) = \arctan\left(\frac{20}{10}\right) = 63.4^\circ$   
The phase angle  $\varphi$  can be calculated as  $\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{20}{10}\right) = 63.4^\circ$

endstart

### Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage  $\underline{U}$  and the phasor current  $\underline{I}$  in the circuit shown in the figure. The components  $R$  and  $X_L$  shall be given. The voltage source  $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t) \text{ V}$  is connected to a series combination of a resistor of  $10 \mu\Omega$  and a capacitor of  $30.22 \mu\text{F}$ , all in series.

Solution  
Result  
.. Draw the circuit diagram of the given circuit.  
Label all components, voltages, and currents.


```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi \cdot 15 \\
\omega &= 2\pi \cdot 15 \cdot 10^{-3} = 942 \text{ rad/s} \\
\begin{align*} I &= \frac{U}{Z} = \frac{10 \text{ V}}{\sqrt{R^2 + \left(\frac{1}{\omega C}\right)^2}} \\
&= \frac{10}{\sqrt{30^2 + \left(\frac{1}{942 \cdot 10^{-6}}\right)^2}} \\
&= \frac{10}{\sqrt{900 + 112.5}} = \frac{10}{\sqrt{1012.5}} \approx 0.31 \text{ A} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot 15 \cdot 10^{-3} \cdot 10^{-6}} \\
&= \frac{1}{300 \cdot 10^{-9}} = \frac{1}{3 \cdot 10^{-7}} = 333.33 \text{ k}\Omega \\
\end{align*}
\begin{align*} \underline{Z} &= R + j\underline{Z}_L + \underline{Z}_C \\
&= 30 + j\underline{Z}_L - j\underline{Z}_C \\
|\underline{Z}| &= \sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2}
\end{align*}

```

□□□□□□□□ □510...



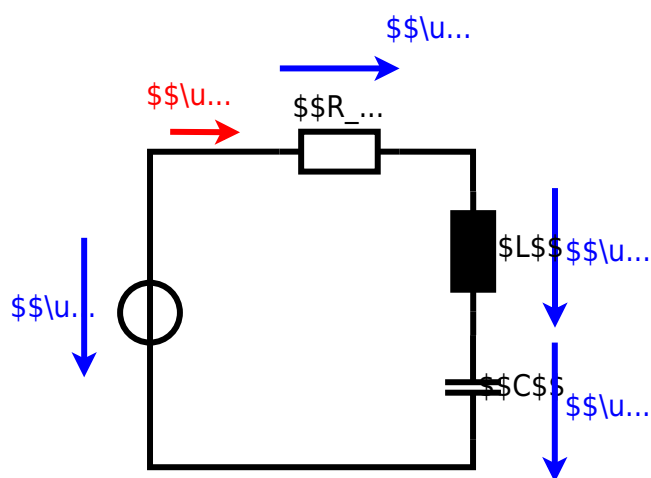

endstart

**Exercise E6 Impedances at different Frequencies**  
(written test, approx. 18 % of a 60-minute written test, WS2022)

**2. A series circuit contains a resistor with  $R_1 = 1.00 \text{ k}\Omega$  and a capacitor with  $C_1 = 40 \text{ nF}$ . A voltage source of  $U = 10 \text{ V}$  is connected in series with the resistor and the capacitor. Calculate the absolute value of the impedance  $|Z|$  at  $f = 4 \text{ MHz}$ .**

**Solution**

$|Z| = \sqrt{R^2 + X_C^2}$

$|Z| = \sqrt{(1.00 \text{ k}\Omega)^2 + (10 \text{ V} / (2\pi \cdot 4 \text{ MHz} \cdot 40 \text{ nF}))^2}$

$|Z| = \sqrt{(1.00 \text{ k}\Omega)^2 + (10 \text{ V} / (2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}))^2}$

$|Z| = \sqrt{(1.00 \text{ k}\Omega)^2 + (10 \text{ V} / (2\pi \cdot 4 \cdot 40 \cdot 10^{-3}))^2}$

$|Z| = \sqrt{(1.00 \text{ k}\Omega)^2 + (10 \text{ V} / (1000))^2}$

$|Z| = \sqrt{(1.00 \text{ k}\Omega)^2 + (0.01 \text{ V})^2}$

$|Z| = \sqrt{1.000001 \text{ k}\Omega^2}$

$|Z| \approx 1.00 \text{ k}\Omega$

endstart

**Exercise E1 Resistance of a Wire by Resistivity**  
(written test, approx. 6 % of a 60-minute written test, WS2022)

**2. A heating element made of nichrome wire with a diameter of  $d = 0.18 \text{ mm}$  and a length of  $l = 3 \text{ m}$  is used for heating. Calculate the resistance  $R$  of the heating element.**

**Solution**

$R = \rho \cdot \frac{l}{A}$

$R = 1.10 \cdot 10^{-6} \text{ }\Omega\text{m} \cdot \frac{3 \text{ m}}{\pi \cdot (0.18 \text{ mm} / 2)^2}$

$R = 1.10 \cdot 10^{-6} \text{ }\Omega\text{m} \cdot \frac{3 \text{ m}}{\pi \cdot (0.09 \text{ mm})^2}$

$R = 1.10 \cdot 10^{-6} \text{ }\Omega\text{m} \cdot \frac{3 \text{ m}}{\pi \cdot 0.0081 \text{ mm}^2}$

$R = 1.10 \cdot 10^{-6} \text{ }\Omega\text{m} \cdot \frac{3 \text{ m}}{0.0254 \text{ mm}^2}$

$R = 1.10 \cdot 10^{-6} \text{ }\Omega\text{m} \cdot 118.11 \text{ m}^{-2}$

$R = 0.13 \text{ }\Omega$



Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad | \quad R &= \rho \cdot \frac{l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$


endstart

**Exercise E4 Charging Capacitors**  
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance of the battery. The voltage across the capacitor is again  $U_c(t_2)$  at the moment  $t_2 = 1 \text{ ms}$  after closing the switch. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Solution**  
Hint: To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .


**Solution**  
The ideal voltage source  $U$  and the internal resistance  $R_1$  can be replaced by an equivalent voltage source  $U_{eq} = U \cdot \frac{R_2}{R_1 + R_2}$  and an internal resistance  $R_{eq} = R_1 \parallel R_2$ .  
On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .

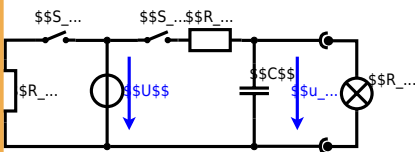

The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ } \Omega$  and a capacitor of  $C = 100 \text{ } \mu\text{F}$ .  
The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first asks. At the moment  $t_0 = 0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0) = 0 \text{ V}$ .

... First do not consider the light bulb - it is not connected to the RC circuit.  
Calculate the point of time  $t_1$  when  $u_c(t_1) = 0.5 \cdot U$ .

Solution

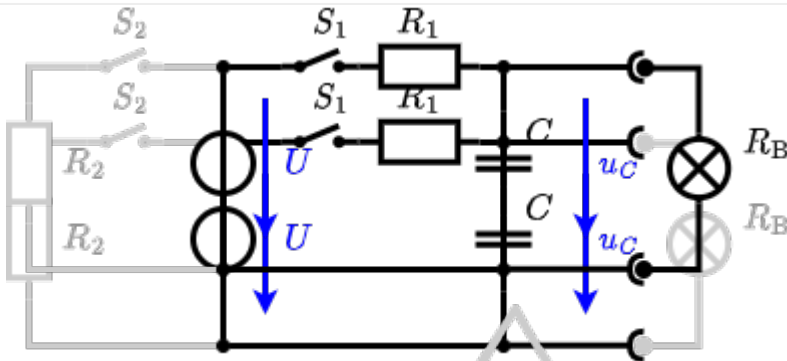


So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_C(t)$  which has to be  $u_C(t_1) = 0.5 \cdot U$ :  

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5$   

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$

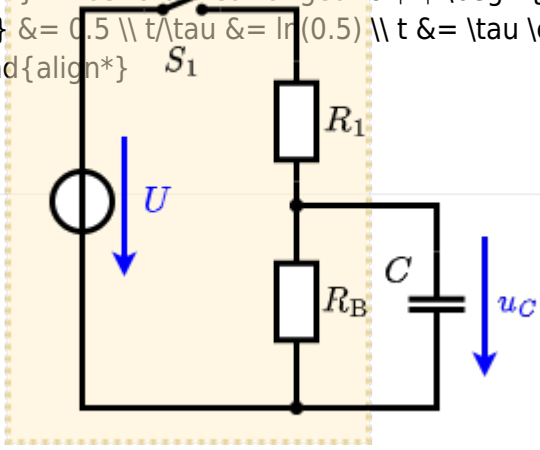

An equivalent linear voltage source can be given with  $U$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$   
 The internal resistance is given by substituting the ideal voltage source with its resistance ( $R_i = 0 \Omega$ , short-circuit).  

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms}/(10 \Omega \cdot 100 \mu\text{F})})$$


endstart

**Exercise E3 Pure Resistor Network Simplification**  
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0.10 A. On the left,  $R_1 = R_2 = 10 \Omega$  and  $R_3 = 10 \Omega$  and the voltage source  $U = 10 \text{ V}$ .  
 Result:  $R_B$ .

Solution

$R_{\text{eq}}$  (transfer function)  $\omega = 100 \text{ rad/s}$

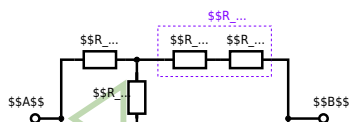

Since  $R_2=R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between  $A$  and  $B$ .

Solution

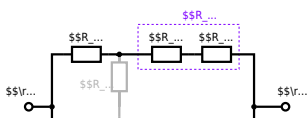

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = \{500 \sim \Omega \parallel (200 \sim \Omega) \parallel R_{\text{eq}} = \{500 \sim \Omega \cdot 200 \sim \Omega \} \over {500 \sim \Omega + 200 \sim \Omega} \}$$

end

From: <https://mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link: [https://mexle.te.hs-heilbronn.de/electrical\\_engineering\\_1/ws2022\\_exam?rev=1680091981](https://mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1680091981)

Last update: **2023/03/29 14:13**

