

# Exam Winter Semester 2022

## Student Group

First Name	Surname	Matrikel Nr.

## Table of Contents

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) .....	3
Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) .....	6
Exercise E2 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) .....	7
Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) .....	7
Exercise E3 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) .....	11
Exercise E4 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) .....	11
Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) .....	12
Exercise E6 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) .....	13
Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) .....	15
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) .....	19
Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) .....	20
Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) .....	20
Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) .....	24
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) .....	24
Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,	

WS2022) ..... 25


Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute  
written test, WS2022) ..... 26

start

**Exercise E1 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result

$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \text{ } \Omega \end{aligned}$$

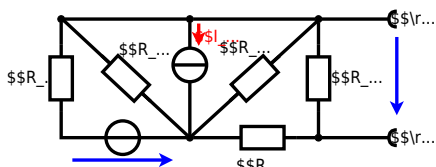

Calculated the internal resistance  $R_{\text{i}}$  and the source voltage  $U_{\text{rs}}$  of an equivalent linear voltage source on the connectors  $\text{A}$  and  $\text{B}$ .  $R_1=5.0 \text{ } \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3= 10 \text{ } \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \text{ } \Omega$ ,  $R_6=7.5 \text{ } \Omega$ ,  $R_7=15 \text{ } \Omega$  Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :



Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ : 
$$R_{135} = R_1 || R_3 || R_5$$
 
$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following: 
$$U_{24} = I_{24} \cdot R_{135} + I_{24} \cdot R_4 + I_{24} \cdot R_5$$

$$U_{24} = U_{23} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5}$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) = \left( \frac{U_{23}}{R_1} - I_4 \right) \cdot \left( \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right)$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \left( \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot \left( \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

endstart

**Exercise E1 Temperature-dependent Resistance**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

2. The diagram shows a circuit with a resistor  $R$  and a voltage source  $U_0$ . The resistor has a temperature-dependent resistance  $R(T)$ . The circuit is connected to a refrigerator with a temperature  $T_{ref}$ . The resistor is placed in the refrigerator. The voltage  $U$  across the resistor is measured. The resistance  $R$  is determined by the voltage  $U$  and the current  $I$  through the resistor.

Its temperature coefficients are:  $\alpha = 0.01 \text{ K}^{-1}$  and  $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$ .

The temperature inside the refrigeration system can reach down to  $-40 \text{ }^\circ\text{C}$ .

$$R = 10 \text{ k}\Omega \cdot (1 + 0.01 \cdot \Delta T + 71 \cdot 10^{-6} \cdot \Delta T^2)$$

The power  $P$  dissipated in the resistor is  $P = U \cdot I = \frac{U^2}{R}$ . Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

with  $\Delta T = T_{end} - T_{start}$

$$R = 10 \text{ k}\Omega \cdot \left( 1 + 0.01 \cdot (-40 \text{ }^\circ\text{C} - 25 \text{ }^\circ\text{C}) + 71 \cdot 10^{-6} \cdot (-40 \text{ }^\circ\text{C} - 25 \text{ }^\circ\text{C})^2 \right)$$

endstart

### Exercise E2 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage  $\underline{U}$  and the phasor current  $\underline{I}$  in the circuit shown in the figure. The components  $R$  and  $X_L$  shall be given.

After analysis, the following phasors can be determined:  $\underline{U} = 48.2 \angle 19.8^\circ \text{ V}$  and  $\underline{I} = 19.8 \angle -48.2^\circ \text{ A}$ .

Solution  
.. Calculate the physical values of the components.  
Solution  $R = 10 \Omega$ ,  $X_L = 20 \Omega$

Solution  
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{10 + j20} = 1.98 \angle -63.4^\circ \text{ A}$$
  
The current and voltage are in phase since the circuit is purely resistive.  
The voltage across the capacitor is  $\underline{U}_C = \underline{I} \cdot (-j20) = -39.6 \angle -63.4^\circ \text{ V}$   
The voltage across the inductor is  $\underline{U}_L = \underline{I} \cdot j20 = 39.6 \angle -23.4^\circ \text{ V}$   
The phase angle  $\varphi$  can be calculated as  $\varphi = \arctan\left(\frac{-4.68}{0.24}\right) = -10.8^\circ$   
With the complex part comes the complex value  $\underline{U} = 48.2 \angle 19.8^\circ \text{ V}$   
 $\varphi = \arctan\left(\frac{4.68}{0.24}\right) = 10.8^\circ$   
The phase angle  $\varphi$  can be calculated as  $\varphi = \arctan\left(\frac{\text{Im}(\underline{U})}{\text{Re}(\underline{U})}\right) = \arctan\left(\frac{16.5}{48.2}\right) = 19.8^\circ$

endstart

### Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage  $\underline{U}$  and the phasor current  $\underline{I}$  in the circuit shown in the figure. The components  $R$  and  $X_L$  shall be given. The voltage source  $u(t) = 3.0 \sin(2\pi \cdot 15 \cdot t) \text{ V}$  has a frequency of  $f = 15 \text{ Hz}$ .

Solution  
This linear source is connected with an inductor of  $330 \mu\text{H}$  and a capacitor of  $30.22 \mu\text{F}$ , all in series.

Result  
.. Draw the circuit diagram of the given circuit.  
Label all components, voltages, and currents.

```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi f = 2\pi \cdot 15 \\
\omega &= 2\pi \cdot 15 = 94.2 \text{ rad/s} \\
\end{align*}
\begin{align*} Z_L &= 2\pi f L = 2\pi \cdot 15 \cdot 330 \cdot 10^{-6} \\
&= 3.16 \text{ m}\Omega \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} = \frac{1}{2\pi \cdot 15 \cdot 330 \cdot 10^{-6}} \\
&= 159.15 \text{ }\Omega \\
\end{align*}
\underline{Z} = R + \underline{Z}_L + \underline{Z}_C \quad \underline{Z} = R + j \\
\cdot \underline{Z}_L - j \cdot \underline{Z}_C \quad \underline{Z} = R + j(\underline{Z}_L - \underline{Z}_C) \quad |\underline{Z}| = \\
\sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2}

```

□□□□□□□□ □510...





endstart

### Exercise E3 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit means that the current is constant on every component.  
 The equivalent impedance for  $R$  and  $L$  combined is given by  $Z = \sqrt{R^2 + X_L^2}$   
 Parallel circuit means that the voltage is the same on  $R_1$  and  $C_1$   
 Budget in the parallel circuit:  $X_C = \frac{1}{\omega C}$  and  $X_L = \omega L$   
 $X_C = \frac{1}{2\pi \cdot 40 \cdot 10^{-9}} = 199 \text{ } \Omega$   
 $X_L = 2\pi \cdot 4 \cdot 10^6 \cdot 4 \cdot 10^{-9} = 100 \text{ } \Omega$   
 $Z = \sqrt{100^2 + 199^2} = 223 \text{ } \Omega$   
 Therefore the resulting current of the parallel circuit is given as:  
 $I = \frac{U}{Z} = \frac{10 \text{ V}}{223 \text{ } \Omega} = 44.8 \text{ mA}$   
 Back to the first formula:  $R_3 \cdot I = X_C \cdot I$   
 $R_3 = X_C = 199 \text{ } \Omega$

**Solution**

$R_1 = 100 \text{ } \Omega$   
 $R_2 = 100 \text{ } \Omega$

A series circuit means that the current is constant on every component.  
 The equivalent impedance for  $R$  and  $L$  combined is given by  $Z = \sqrt{R^2 + X_L^2}$   
 Parallel circuit means that the voltage is the same on  $R_1$  and  $C_1$   
 Budget in the parallel circuit:  $X_C = \frac{1}{\omega C}$  and  $X_L = \omega L$   
 $X_C = \frac{1}{2\pi \cdot 40 \cdot 10^{-9}} = 199 \text{ } \Omega$   
 $X_L = 2\pi \cdot 4 \cdot 10^6 \cdot 4 \cdot 10^{-9} = 100 \text{ } \Omega$   
 $Z = \sqrt{100^2 + 199^2} = 223 \text{ } \Omega$   
 Therefore the resulting current of the parallel circuit is given as:  
 $I = \frac{U}{Z} = \frac{10 \text{ V}}{223 \text{ } \Omega} = 44.8 \text{ mA}$   
 Back to the first formula:  $R_3 \cdot I = X_C \cdot I$   
 $R_3 = X_C = 199 \text{ } \Omega$

endstart

### Exercise E4 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element is used to heat the wire with a temperature of  $1800 \text{ } ^\circ\text{C}$ .  
 Result: power dissipation (= heat flow) of  $P=40 \text{ W}$  is necessary.  
 Distribute the current in the heating elements.  
 The Nichrome wire has a resistivity of  $1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m}$ .  
 The heating element is  $3 \text{ m}$  long and has a diameter of  $3.57 \text{ mm}$ .  
 Calculate the resistance  $R$  of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad | \quad R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

endstart

**Exercise E5 Charging Capacitors**  
**(written test, approx. 16 % of a 60-minute written test, WS2022)**

The circuit (with the real battery) also takes into account the internal resistance  $R_1$  of the battery. The capacitor  $C$  is initially uncharged. The switch  $S_1$  is closed at  $t_0 = 0 \text{ s}$  and the voltage across the capacitor is again  $U_C$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_C(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Solution**  
 Hint: To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

**Solution**  
 The ideal voltage source  $U$  is in series with the internal resistance  $R_1$  and the external resistance  $R_2$ . The voltage across the capacitor is again  $U_C$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_C(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.




The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ } \Omega$  and a capacitor of  $C = 100 \text{ } \mu\text{F}$ .

The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first asks. At the moment  $t_0 = 0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_C(t_0) = 0 \text{ V}$ .

- .. First do not consider the light bulb - it is not connected to the RC circuit.
- Calculate the point of time  $t_1$  when  $u_C(t_1) = 0.5 \cdot U$ .

Solution

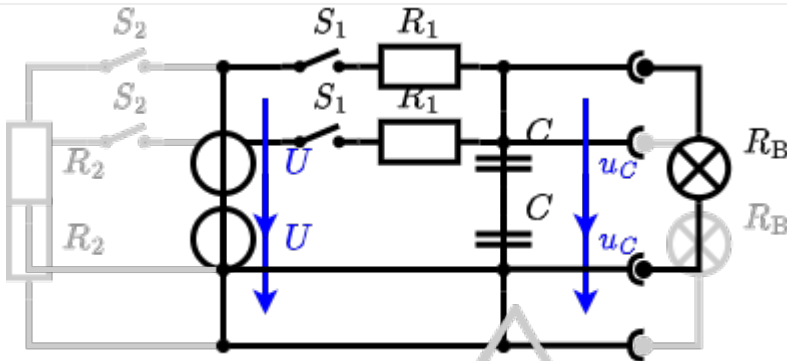

So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_C(t)$  which has to be  $u_C(t_1) = 0.5 \cdot U$ :  

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5$   

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$   
 The internal resistance is given by substituting the ideal voltage source with its resistance ( $R_i = 0 \Omega$ , short-circuit).  
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms}/(10 \Omega \cdot 100 \mu\text{F})})$$


endstart

**Exercise E6 Pure Resistor Network Simplification**  
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0°C. On the left,  $R_1 = R_2 = R_3 = 10 \Omega$  and  $R_4 = R_5 = 20 \Omega$ . The voltage source  $U = 10 \text{V}$  is connected between terminals A and B.

Solution

$R_2 = R_3 = 100 \Omega$

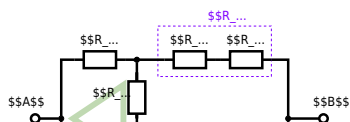

Since  $R_2 = R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between  $A$  and  $B$ .

Solution

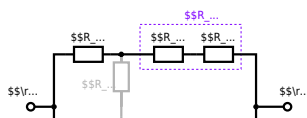

The equivalent resistor is given by a parallel configuration of resistors in series:


$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

endstart

**Exercise E3 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

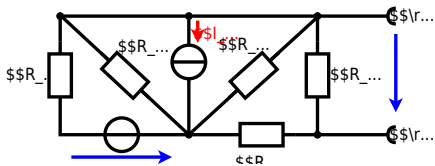


Calculate the internal resistance  $R_{in}$  and the source voltage  $U_{s}$  of an equivalent linear voltage source on the connectors  $A$  and  $B$ .  
 $R_1=5.0 \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3= 10 \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \Omega$ ,  $R_6=7.5 \Omega$ ,  $R_7=15 \Omega$   
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

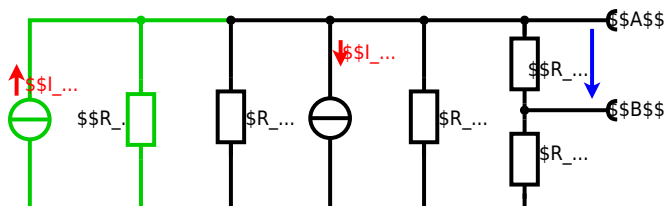

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ : 
$$R_{135} = R_1 || R_3 || R_5$$
 
$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following: 
$$U_{24} = I_{24} \cdot R_{135} + U_1$$

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left( \frac{U_2}{R_1} - I_4 \right) \cdot \left( \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right)$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \left( \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot \left( \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

endstart

**Exercise E2 Temperature-dependent Resistance**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

2. The diagram shows a circuit with a resistor  $R$  and a voltage source  $U$ . The resistor has a temperature-dependent resistance  $R(T) = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$ . The voltage source has a constant voltage  $U = 10 \text{ V}$ . The resistor is initially at  $T_{start} = 25 \text{ °C}$  and is heated to  $T_{end} = 40 \text{ °C}$ . Calculate the power  $P$  dissipated in the resistor at  $T_{end}$ .

Its temperature coefficients are:  $\alpha = 0.01 \text{ K}^{-1}$  and  $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$ .

Result: The temperature inside the refrigeration system can reach down to  $-40 \text{ °C}$ . Calculate the resistance of the thermistor at  $-40 \text{ °C}$ .

Resistor transfer resistor  $P = U^2 / R$  and  $P = U \cdot I$ . Therefore, a solution is to heat up the refrigeration system.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

with  $\Delta T = T_{end} - T_{start}$

$$R = 10 \text{ k}\Omega \cdot \left( 1 + 0.01 \text{ K}^{-1} \cdot (-40 \text{ °C} - 25 \text{ °C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40 \text{ °C} - 25 \text{ °C})^2 \right)$$

endstart

### Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage  $\underline{U}$  and the complex power  $\underline{S}$  in the circuit shown in the figure. The current  $i(t) = 0.24 \cos(\omega t - 20^\circ)$  A and the voltage  $u(t) = 50 \cos(\omega t + 30^\circ)$  V are given. The components ( $R$  and  $X_L$ ) shall be given.

After analysis, the full low-dimensional circuit impedance  $\underline{Z}$  can be extracted and the magnitude  $|\underline{Z}|$  and phase  $\angle \underline{Z}$  of the impedance  $\underline{Z}$  can be determined.

Solution  
.. Calculate the physical values of the components.  
Solution  $\underline{Z} = \frac{\underline{U}}{\underline{I}} = \frac{50 \angle 30^\circ}{0.24 \angle -20^\circ} = 208.3 \angle 50^\circ \Omega$

Solution  
$$\underline{U} = \underline{Z} \cdot \underline{I} = (208.3 \angle 50^\circ) \cdot (0.24 \angle -20^\circ) = 50 \angle 30^\circ \text{ V}$$
  
The current and voltage are in phase, so the circuit is purely resistive.  
Resulting impedance  $\underline{Z} = \frac{\underline{U}}{\underline{I}} = \frac{50 \angle 30^\circ}{0.24 \angle -20^\circ} = 208.3 \angle 50^\circ \Omega$   
The real part is the resistance  $R = 130 \Omega$  and the imaginary part is the inductive reactance  $X_L = 158.3 \Omega$ .  
With the complex part comes the complex value  $\underline{S} = \underline{U} \cdot \underline{I}^* = 50 \angle 30^\circ \cdot 0.24 \angle 20^\circ = 12 \angle 50^\circ \text{ VA}$   
The phase  $\varphi$  can be calculated as  $\varphi = \arctan\left(\frac{\text{Im}(\underline{S})}{\text{Re}(\underline{S})}\right) = \arctan\left(\frac{9.6}{7.7}\right) = 51.1^\circ$

endstart

### Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage  $\underline{U}$  and the complex power  $\underline{S}$  in the circuit shown in the figure. The current  $i(t) = 3.0 \cos(\omega t - 15^\circ)$  A and the voltage  $u(t) = 30 \cos(\omega t + 30^\circ)$  V are given. The components ( $R$  and  $X_L$ ) shall be given.

After analysis, the full low-dimensional circuit impedance  $\underline{Z}$  can be extracted and the magnitude  $|\underline{Z}|$  and phase  $\angle \underline{Z}$  of the impedance  $\underline{Z}$  can be determined.

Solution  
.. Draw the circuit diagram of the given circuit.  
Solution  $\underline{Z} = \frac{\underline{U}}{\underline{I}} = \frac{30 \angle 30^\circ}{3.0 \angle -15^\circ} = 10 \angle 45^\circ \Omega$   
Result  $\underline{S} = \underline{U} \cdot \underline{I}^* = 30 \angle 30^\circ \cdot 3.0 \angle 15^\circ = 90 \angle 45^\circ \text{ VA}$

```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi \cdot 15 \\
\omega &= 2\pi \cdot 15 \cdot 10^{-3} = 942 \text{ rad/s} \\
\begin{align*} I &= \frac{U}{|Z|} = \frac{10}{\sqrt{R^2 + \left(\frac{1}{\omega C}\right)^2}} \\
&= \frac{10}{\sqrt{30^2 + \left(\frac{1}{942 \cdot 10^{-6}}\right)^2}} \\
&= 19.28 \text{ mA} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot 15 \cdot 10^{-3} \cdot 10^{-6}} \\
&= 1105 \text{ } \Omega \\
\end{align*}
\underline{Z} = R + j\underline{Z}_L + \underline{Z}_C \quad \underline{Z} = R + j \\
\cdot \underline{Z}_L - j \cdot \underline{Z}_C \quad \underline{Z} = R + j(\underline{Z}_L - \underline{Z}_C) \quad |\underline{Z}| = \\
\sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2}

```

□□□□□□□□ □510...





endstart

### Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit means that the current is constant on every component.  
 The equivalent impedance for  $R$  and  $L$  combined is given by  $Z = \sqrt{R^2 + X_L^2}$   
 Parallel circuit means that the voltage is the same on  $R_1$  and  $C_1$   
 Budget in the parallel circuit:  $V = I \cdot Z$  since  $V$  is perpendicular to  $R_2$  this can be simplified to  $I \cdot R_2 = V$  (It has to, since  $R_3$  is perpendicular to  $V$ )  
 Therefore the resulting current of the parallel circuit is given as:  
 $I_{3R} = \frac{V}{R_3} + \frac{V}{X_{C3}}$   
 This can be rearranged to get  $R_2 = \frac{V}{I_{3R}}$  Under  $\sqrt{R_2^2 + X_{L2}^2} = \frac{V}{I_{3R}}$   
 $R_2 = \frac{V}{I_{3R}} \cdot \sqrt{1 - (2\pi \cdot 450 \cdot 4.7 \cdot 10^{-6})^2}$   
 Back to the first formula:  $R_3 \cdot I_{3R} = X_{C3} \cdot I_{3R} \cdot \frac{R_3}{X_{C3}}$   
 $I_{3R} = \frac{V}{R_3} \cdot \frac{R_3}{\sqrt{R_3^2 - (2\pi \cdot f \cdot C_3)^2}}$

Solution

$R_1 = 1.00 \cdot \Omega$

$R_2 = 10.0 \cdot \Omega$

---

A series circuit means that the current is constant on every component.  
 The equivalent impedance for  $R$  and  $L$  combined is given by  $Z = \sqrt{R^2 + X_L^2}$   
 Parallel circuit means that the voltage is the same on  $R_1$  and  $C_1$   
 Budget in the parallel circuit:  $V = I \cdot Z$  since  $V$  is perpendicular to  $R_2$  this can be simplified to  $I \cdot R_2 = V$  (It has to, since  $R_3$  is perpendicular to  $V$ )  
 Therefore the resulting current of the parallel circuit is given as:  
 $I_{3R} = \frac{V}{R_3} + \frac{V}{X_{C3}}$   
 This can be rearranged to get  $R_2 = \frac{V}{I_{3R}}$  Under  $\sqrt{R_2^2 + X_{L2}^2} = \frac{V}{I_{3R}}$   
 $R_2 = \frac{V}{I_{3R}} \cdot \sqrt{1 - (2\pi \cdot 450 \cdot 4.7 \cdot 10^{-6})^2}$   
 Back to the first formula:  $R_3 \cdot I_{3R} = X_{C3} \cdot I_{3R} \cdot \frac{R_3}{X_{C3}}$   
 $I_{3R} = \frac{V}{R_3} \cdot \frac{R_3}{\sqrt{R_3^2 - (2\pi \cdot f \cdot C_3)^2}}$

endstart

### Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element is used to heat the wire with a temperature of  $180^\circ\text{C}$ .  
 Result power dissipation (= heat flow) of  $P=40 \text{ W}$  is necessary.  
 Calculate the current  $I$  needed to operate it.  
 The Nichrome wire has a resistivity of  $1.10 \cdot 10^{-6} \cdot \Omega \cdot \text{m}$ .

The heating element is  $3 \text{ m}$  long and has a diameter of  $3.57 \text{ mm}$ .  
 Calculate the resistance  $R$  of the heating element.

Solution  $R = 10.3 \cdot \Omega$

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad | \quad R &= \rho \cdot \frac{l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

endstart

**Exercise E4 Charging Capacitors**  
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance  $R_1$  of the battery. The capacitor  $C$  is initially uncharged. The switch  $S_1$  is closed at  $t_0 = 0 \text{ s}$  and the voltage across the capacitor is again  $U_C$  at the moment  $t_2 = 1 \text{ ms}$  after closing the switch. Calculate the voltage  $u_C(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Solution**  
Hint: To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

**Solution**  
The ideal voltage source  $U$  and the internal resistance  $R_1$  can be replaced by an equivalent voltage source  $U_{eq} = U \cdot \frac{R_2}{R_1 + R_2}$  and an internal resistance  $R_{eq} = R_1 \cdot \frac{R_2}{R_1 + R_2}$ .  
On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .




The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ } \Omega$  and a capacitor of  $C = 100 \text{ } \mu\text{F}$ .

The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first asks. At the moment  $t_0 = 0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_C(t_0) = 0 \text{ V}$ .

- 1. First do not consider the light bulb - it is not connected to the RC circuit.
- 2. Calculate the point of time  $t_1$  when  $u_C(t_1) = 0.5 \cdot U$ .

Solution

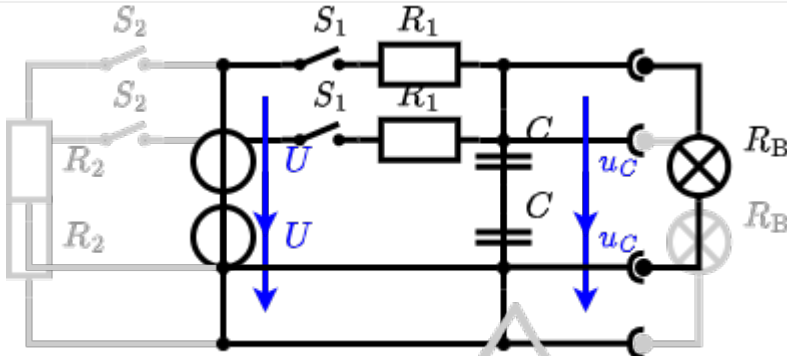

So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_C(t)$  which has to be  $u_C(t_1) = 0.5 \cdot U$ :  

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5$   

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$   
 The internal resistance is given by substituting the ideal voltage source with its resistance ( $R_i = 0 \Omega$ , short-circuit).  
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms} / (10 \Omega \cdot 100 \mu\text{F})})$$


endstart

**Exercise E3 Pure Resistor Network Simplification**  
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0°C. On the left,  $R_1 = R_2 = 1.5 \text{ k}\Omega$  and the voltage source  $U = 10 \text{ V}$ .  
 Result:  $R_B$ .

Solution

$R_2 = R_3 = 100 \Omega$

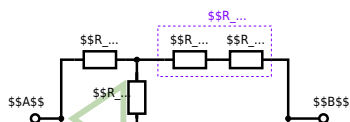

Since  $R_2 = R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between  $A$  and  $B$ .

Solution

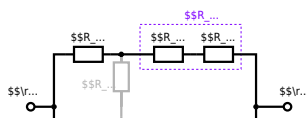

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = \{500 \sim \Omega \parallel (200 \sim \Omega) \parallel R_{\text{eq}} = \{500 \sim \Omega \cdot 200 \sim \Omega \} \over {500 \sim \Omega + 200 \sim \Omega} \}$$

end

From: <https://mexle.te.hs-heilbronn.de/> - **MEXLE Wiki**

Permanent link: [https://mexle.te.hs-heilbronn.de/electrical\\_engineering\\_1/ws2022\\_exam?rev=1680100793](https://mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1680100793)

Last update: **2023/03/29 16:39**

