

# Exam Winter Semester 2022

## Student Group

First Name	Surname	Matrikel Nr.

## Table of Contents

- Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 3
- Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 6
- Exercise E2 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 7
- Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) ..... 7
- Exercise E3 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) ..... 10
- Exercise E4 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 10
- Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) ..... 11
- Exercise E6 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) ..... 12
- Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 14
- Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 18
- Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 19
- Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) ..... 19
- Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) ..... 22
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 22
- Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,


WS2022) ..... 23

Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute  
written test, WS2022) ..... 24

**Exercise E1 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result

$$\begin{aligned} U_{\text{S}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \Omega \end{aligned}$$

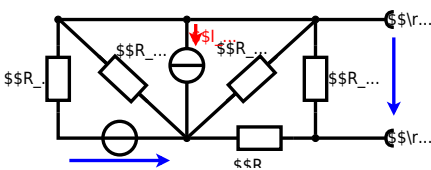


Calculated the internal resistance  $R_{\text{i}}$  and the source voltage  $U_{\text{S}}$  of an equivalent linear voltage source on the connectors  $\text{A}$  and  $\text{B}$ .  
 $R_1=5.0 \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3= 10 \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \Omega$ ,  $R_6=7.5 \Omega$ ,  $R_7=15 \Omega$  Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

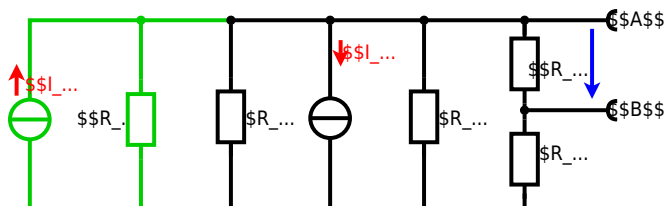

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ : 
$$R_{135} = R_1 || R_3 || R_5$$
 
$$I_{24} = I_2 - I_4 = \frac{U_{24}}{R_1} - I_4$$
 The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following: 
$$U_{24}$$

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left( \frac{U_2}{R_1} - I_4 \right) \cdot R_1 || R_3 || R_5$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \left( \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot 15 \Omega \cdot 2.5 \Omega \cdot \frac{1}{7.5 \Omega + 15 \Omega + 2.5 \Omega}$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

**Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)**

2. A refrigerator is explained with the effect of resistance on refrigeration system. The refrigerator has a resistance of  $15 \Omega$  at  $25^\circ \text{C}$  and  $2.5 \Omega$  at  $0^\circ \text{C}$ .

Its temperature coefficients are:  $\alpha = 0.01 \text{ K}^{-1}$  and  $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$ .

**Result** The temperature inside the refrigeration system can reach down to  $-40^\circ \text{C}$ .

$$R = 6.5 \text{ k}\Omega \text{ at } -40^\circ \text{C}$$

The power transfer is  $P = U \cdot I = \frac{U^2}{R}$  and  $Q = P \cdot t$ . Therefore, a solution is to use a heat pump.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$\Delta T = T_{\text{end}} - T_{\text{start}}$$

$$R = 10 \text{ k}\Omega \cdot \left( 1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ \text{C} - 25^\circ \text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ \text{C} - 25^\circ \text{C})^2 \right)$$

**Exercise E2 Analyzing complex Impedances**  
 (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the complex power  $\underline{S}$  (W and var) of the load  $\underline{Z}_L$  through the components.  $\underline{S}_R$  and  $\underline{X}_L$  shall be given.

After analysis, the full load impedance  $\underline{Z}_L$  can be extracted and the magnitude in phase  $\varphi$  can be determined.  $\underline{Z}_L = (2 + j4) \Omega$

Solution  
 .. Calculate the physical values of the load components.  
 Solution  $R = 2 \Omega$  and  $X_L = 4 \Omega$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{(2 + j4) \Omega} = 12.5 \angle -63.4^\circ \text{ A}$$
 The voltage across the load is  $\underline{U}_L = \underline{I} \cdot \underline{Z}_L = 12.5 \angle -63.4^\circ \cdot (2 + j4) = 50 \angle 0^\circ \text{ V}$   
 The complex power is  $\underline{S} = \underline{U}_L \cdot \underline{I}^* = 50 \angle 0^\circ \cdot 12.5 \angle 63.4^\circ = 625 \angle 63.4^\circ \text{ VA}$   
 With the complex power  $\underline{S} = P + jQ$ , the physical values are  $P = 281.25 \text{ W}$  and  $Q = 549.7 \text{ var}$   
 The phase  $\varphi$  can be calculated as  $\varphi = \arctan\left(\frac{\text{Im}(\underline{S})}{\text{Re}(\underline{S})}\right) = \arctan\left(\frac{549.7}{281.25}\right) = 63.4^\circ$

**Exercise E1 Complex Impedance Circuit**  
 (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the circuit impedance  $\underline{Z}$  for a source  $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t) \text{ V}$ .  
 The circuit consists of a resistor of  $10 \Omega$ , an inductor of  $330 \mu\text{H}$ , and a capacitor of  $0.22 \mu\text{F}$ , all in series.

Solution

Result  
 .. Draw the circuit diagram of the given circuit and label all components, voltages, and currents.

$$\underline{Z} = R + j\omega L - j\omega C = 10 \Omega + j(2\pi \cdot 15 \cdot 330 \cdot 10^{-6}) - j(2\pi \cdot 15 \cdot 0.22 \cdot 10^{-6}) = 10 \Omega + j0.0314 \Omega - j0.00207 \Omega = 10 \Omega + j0.0293 \Omega$$

$$|\underline{Z}| = \sqrt{10^2 + 0.0293^2} \approx 10 \Omega$$

$$\varphi = \arctan\left(\frac{0.0293}{10}\right) \approx 0.17^\circ$$





**Exercise E3 Impedances at different Frequencies**  
**(written test, approx. 18 % of a 60-minute written test, WS2022)**

2. A series circuit consists of a resistor with a resistance of  $R_1 = 1.00 \text{ k}\Omega$ , a capacitor with a capacitance of  $C_1 = 40 \text{ nF}$ , and an inductor with an inductance of  $L_1 = 4.7 \text{ }\mu\text{H}$ . The circuit is connected to an AC voltage source with a voltage of  $U = 10 \text{ V}$  and a frequency of  $f = 4 \text{ MHz}$ . Calculate the absolute value of the impedance of the circuit.

Solution

$$R_1 = 1.00 \text{ k}\Omega$$

$$R_2 = 10.0 \text{ }\Omega$$

A series circuit means that the current is constant on every component.

The equivalent impedance for  $R_1$  and  $L_1$  combined is given by 
$$Z_{RL} = \sqrt{R_1^2 + X_{L1}^2}$$

Parallel circuit means that the voltage is the same on  $R_2$  and  $C_1$  
$$Z_{RC} = \frac{R_2 \cdot X_{C1}}{\sqrt{R_2^2 + X_{C1}^2}}$$

Since  $U$  is perpendicular to  $R_2$  this can be simplified to 
$$Z_{RC} = \frac{R_2}{\sqrt{1 + \left(\frac{X_{C1}}{R_2}\right)^2}}$$

$X_{L1}$  is perpendicular to  $X_{C1}$  (It has to, since  $R_1$  is perpendicular to  $X_{L1}$  and  $X_{C1}$  too)

Therefore, the resulting current of the parallel circuit is given as: 
$$I_{RC} = \frac{U}{Z_{RC}} + \frac{U}{Z_{RL}}$$

This can be rearranged to 
$$I_{RC} = \frac{U}{\sqrt{R_2^2 + X_{C1}^2}} + \frac{U}{\sqrt{R_1^2 + X_{L1}^2}}$$

Back to the first formula: 
$$R_3 \cdot I_{RC} = X_{C1} \cdot \frac{I_{RC}}{I_{RC}} + \sqrt{R_1^2 + X_{L1}^2} \cdot \frac{I_{RC}}{I_{RC}}$$

**Exercise E4 Resistance of a Wire by Resistivity**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

2. For a heating element used to heat the oven at a temperature of  $180 \text{ }^\circ\text{C}$ , an electric power dissipation (= heat flow) of  $P = 40 \text{ W}$  is necessary.

Calculate the current  $I$  needed to operate the heating elements.

The Nichrome wire has a resistivity of  $\rho = 1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m}$ .

The heating element is  $l = 3 \text{ m}$  long and has a diameter of  $d = 3.57 \text{ mm}$ .

Calculate the resistance  $R$  of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}}$$

$$\sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \cdot \Omega}} \quad \text{align*}$$

$$\begin{aligned} R &= \rho \cdot l \cdot \frac{1}{A} \quad \& \quad | \quad \text{with } A = r^2 \cdot \pi = \\ &= \frac{1}{4} \cdot d^2 \cdot \pi \quad \& \quad \rho = \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = \\ &= 1.10 \cdot 10^{-6} \cdot \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \quad \& \quad \end{aligned}$$


**Exercise E5 Charging Capacitors**  
**(written test, approx. 16 % of a 60-minute written test, WS2022)**

The circuit (with the light bulb) is a series RC circuit. The capacitor is initially uncharged. At  $t_0 = 0 \text{ s}$  the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Solution:** To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

The ideal voltage source  $U$  is in series with  $R_1$  and  $R_2$ . The voltage  $u_c$  is independent of the choice of  $R_1$  and  $R_2$ .

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $S_2$ .

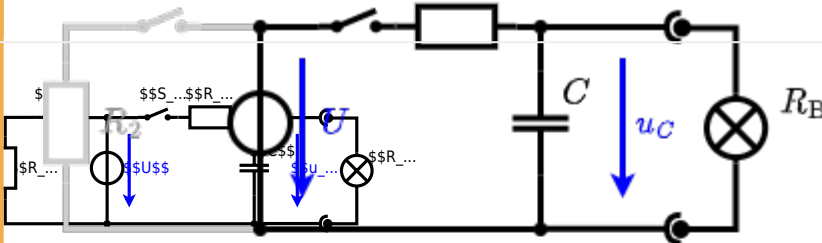


The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ }\Omega$  and a capacitor of  $C = 100 \text{ }\mu\text{F}$ .

The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first tasks. At the moment  $t_0 = 0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0) = 0 \text{ V}$ .

.. First do not consider the light bulb - it is not connected to the RC circuit.

Calculate the point of time  $t_1$  when  $u_c(t_1) = 0.5 \cdot U$ .

**Solution**

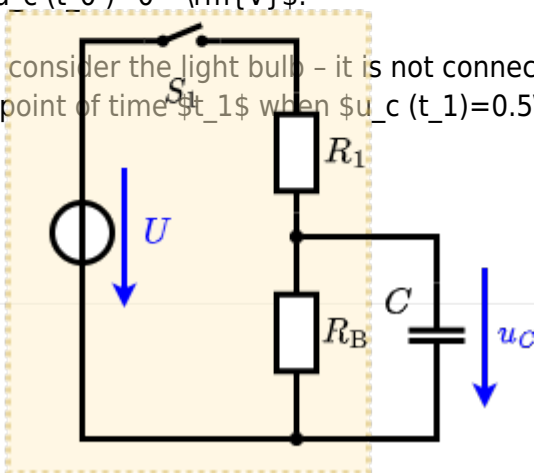

An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$  The internal resistance is given by substituting the ideal voltage source with its resistance ( $R_1 = 0 \Omega$ , short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_c(t) = U_s \cdot (1 - e^{-t/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t/(10 \Omega \cdot 100 \mu F)})$$

The following formula describes the time course of  $u_c(t)$  which has to be  $u_c(t_1) = 0.5 \cdot U$ : 
$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$




**Exercise E6 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall be solved at 0.1 A.  $R_1 = 10 \Omega$ ,  $R_2 = 10 \Omega$ ,  $R_3 = 10 \Omega$ ,  $R_4 = 10 \Omega$ ,  $R_5 = 10 \Omega$ ,  $R_6 = 10 \Omega$ ,  $R_7 = 10 \Omega$ ,  $R_8 = 10 \Omega$ ,  $R_9 = 10 \Omega$ ,  $R_{10} = 10 \Omega$ ,  $R_{11} = 10 \Omega$ ,  $R_{12} = 10 \Omega$ ,  $R_{13} = 10 \Omega$ ,  $R_{14} = 10 \Omega$ ,  $R_{15} = 10 \Omega$ ,  $R_{16} = 10 \Omega$ ,  $R_{17} = 10 \Omega$ ,  $R_{18} = 10 \Omega$ ,  $R_{19} = 10 \Omega$ ,  $R_{20} = 10 \Omega$ ,  $R_{21} = 10 \Omega$ ,  $R_{22} = 10 \Omega$ ,  $R_{23} = 10 \Omega$ ,  $R_{24} = 10 \Omega$ ,  $R_{25} = 10 \Omega$ ,  $R_{26} = 10 \Omega$ ,  $R_{27} = 10 \Omega$ ,  $R_{28} = 10 \Omega$ ,  $R_{29} = 10 \Omega$ ,  $R_{30} = 10 \Omega$ ,  $R_{31} = 10 \Omega$ ,  $R_{32} = 10 \Omega$ ,  $R_{33} = 10 \Omega$ ,  $R_{34} = 10 \Omega$ ,  $R_{35} = 10 \Omega$ ,  $R_{36} = 10 \Omega$ ,  $R_{37} = 10 \Omega$ ,  $R_{38} = 10 \Omega$ ,  $R_{39} = 10 \Omega$ ,  $R_{40} = 10 \Omega$ ,  $R_{41} = 10 \Omega$ ,  $R_{42} = 10 \Omega$ ,  $R_{43} = 10 \Omega$ ,  $R_{44} = 10 \Omega$ ,  $R_{45} = 10 \Omega$ ,  $R_{46} = 10 \Omega$ ,  $R_{47} = 10 \Omega$ ,  $R_{48} = 10 \Omega$ ,  $R_{49} = 10 \Omega$ ,  $R_{50} = 10 \Omega$ ,  $R_{51} = 10 \Omega$ ,  $R_{52} = 10 \Omega$ ,  $R_{53} = 10 \Omega$ ,  $R_{54} = 10 \Omega$ ,  $R_{55} = 10 \Omega$ ,  $R_{56} = 10 \Omega$ ,  $R_{57} = 10 \Omega$ ,  $R_{58} = 10 \Omega$ ,  $R_{59} = 10 \Omega$ ,  $R_{60} = 10 \Omega$ ,  $R_{61} = 10 \Omega$ ,  $R_{62} = 10 \Omega$ ,  $R_{63} = 10 \Omega$ ,  $R_{64} = 10 \Omega$ ,  $R_{65} = 10 \Omega$ ,  $R_{66} = 10 \Omega$ ,  $R_{67} = 10 \Omega$ ,  $R_{68} = 10 \Omega$ ,  $R_{69} = 10 \Omega$ ,  $R_{70} = 10 \Omega$ ,  $R_{71} = 10 \Omega$ ,  $R_{72} = 10 \Omega$ ,  $R_{73} = 10 \Omega$ ,  $R_{74} = 10 \Omega$ ,  $R_{75} = 10 \Omega$ ,  $R_{76} = 10 \Omega$ ,  $R_{77} = 10 \Omega$ ,  $R_{78} = 10 \Omega$ ,  $R_{79} = 10 \Omega$ ,  $R_{80} = 10 \Omega$ ,  $R_{81} = 10 \Omega$ ,  $R_{82} = 10 \Omega$ ,  $R_{83} = 10 \Omega$ ,  $R_{84} = 10 \Omega$ ,  $R_{85} = 10 \Omega$ ,  $R_{86} = 10 \Omega$ ,  $R_{87} = 10 \Omega$ ,  $R_{88} = 10 \Omega$ ,  $R_{89} = 10 \Omega$ ,  $R_{90} = 10 \Omega$ ,  $R_{91} = 10 \Omega$ ,  $R_{92} = 10 \Omega$ ,  $R_{93} = 10 \Omega$ ,  $R_{94} = 10 \Omega$ ,  $R_{95} = 10 \Omega$ ,  $R_{96} = 10 \Omega$ ,  $R_{97} = 10 \Omega$ ,  $R_{98} = 10 \Omega$ ,  $R_{99} = 10 \Omega$ ,  $R_{100} = 10 \Omega$ .

Solution

$$R_{eq} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

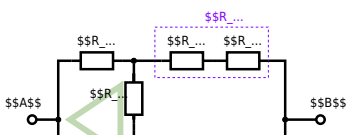

Since  $R_2=R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as:

$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between  $A$  and  $B$ .

Solution




The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

**Exercise E3 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

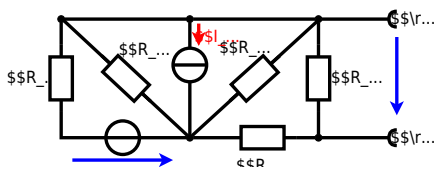


Calculate the internal resistance  $R_{in}$  and the source voltage  $U_{s}$  of an equivalent linear voltage source on the connectors  $A$  and  $B$ .  $R_1=5.0 \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3=10 \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \Omega$ ,  $R_6=7.5 \Omega$ ,  $R_7=15 \Omega$ . Use equivalent sources in order to simplify the circuit!

### Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

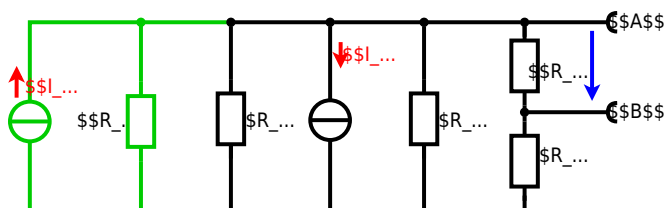

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ : 
$$R_{135} = R_1 || R_3 || R_5$$
 
$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following: 
$$U_{24}$$

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left( \frac{U_2}{R_1} - I_4 \right) \cdot R_1 || R_3 || R_5$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \left( \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot 15 \Omega \cdot 2.5 \Omega \cdot \frac{1}{7.5 \Omega + 15 \Omega + 2.5 \Omega}$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

**Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)**

2. A refrigerator is explained with the effect of resistance on refrigeration systems. The circuit has a resistance of  $15 \Omega$  and a voltage of  $6 \text{ V}$  at  $25^\circ \text{C}$ .

Its temperature coefficients are:  $\alpha = 0.01 \text{ K}^{-1}$  and  $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$ .

**Result**  
The temperature inside the refrigeration system can reach down to  $-40^\circ \text{C}$ .

$$R = 6.5 \text{ k}\Omega$$

The power of the resistor is  $P = U \cdot I = 2 \text{ W}$  and the heat flow is  $Q = P \cdot t = 2 \text{ W} \cdot 1 \text{ s} = 2 \text{ J}$ . Therefore, a solution is to use a heat exchanger.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$\Delta T = T_{\text{end}} - T_{\text{start}}$$

$$R = 10 \text{ k}\Omega \cdot \left( 1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ \text{C} - 25^\circ \text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ \text{C} - 25^\circ \text{C})^2 \right)$$

### Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the complex impedance  $Z$  of the circuit shown in the figure through the components.  $R$  and  $X_L$  shall be given.

After analysis, the full bridge circuit can be simplified to a series circuit in phasor domain. The voltage  $U$  and current  $I$  are given by  $U = 50 \sin(\omega t)$  and  $I = I_m \sin(\omega t + \varphi)$ .

Solution  
.. Calculate the physical values of the two components.  
Solution  $R = 10 \Omega$  and  $X_L = 20 \Omega$

Solution  
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \text{with } \underline{U} = 50 \angle 0^\circ \text{ V and } \underline{Z} = R + jX_L = 10 + j20 \Omega$$
  
The voltage  $U$  is a cosine wave with an amplitude of 50 V and a phase angle of 0 degrees. The resulting impedance is  $Z = 10 + j20 \Omega$ .  
Therefore, the current  $I$  is a cosine wave with the same amplitude of 50 V but a phase angle of  $\varphi = \arctan\left(\frac{20}{10}\right) = 63.4^\circ$  lagging.  
$$\underline{I} = \frac{50 \angle 0^\circ}{10 + j20} = \frac{50}{\sqrt{10^2 + 20^2}} \angle -63.4^\circ = 2 \angle -63.4^\circ \text{ A}$$
  
The physical values are  $I_m = 2 \text{ A}$  and  $\varphi = -63.4^\circ$ .  
With the complex part  $Z = 10 + j20 \Omega$ , the magnitude  $|Z| = \sqrt{10^2 + 20^2} = 22.36 \Omega$  and the phase  $\varphi = \arctan\left(\frac{20}{10}\right) = 63.4^\circ$ .  
The phase  $\varphi$  can be calculated as  $\varphi = \arctan\left(\frac{-4.68}{0.24}\right) = -10.8^\circ$ .


### Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the complex impedance  $Z$  of the circuit shown in the figure. The voltage source  $u(t) = 3.0 \sin(2\pi \cdot 15 \cdot t)$  V is connected to a series circuit of an inductor of  $330 \mu\text{H}$  and a capacitor of  $0.22 \mu\text{F}$ .

Solution  
Result  
.. Draw the circuit diagram of the given circuit and label all components, voltages, and currents.

$$Z = \frac{U}{I} = \frac{3.0 \text{ V}}{0.22 \text{ A}} = 13.6 \Omega$$
  
$$Z_C = \frac{1}{j\omega C} = \frac{1}{j \cdot 2\pi \cdot 15 \cdot 0.22 \cdot 10^{-6}} = -j19.2 \text{ k}\Omega$$
  
$$Z_L = j\omega L = j \cdot 2\pi \cdot 15 \cdot 330 \cdot 10^{-6} = j3.1 \text{ }\Omega$$



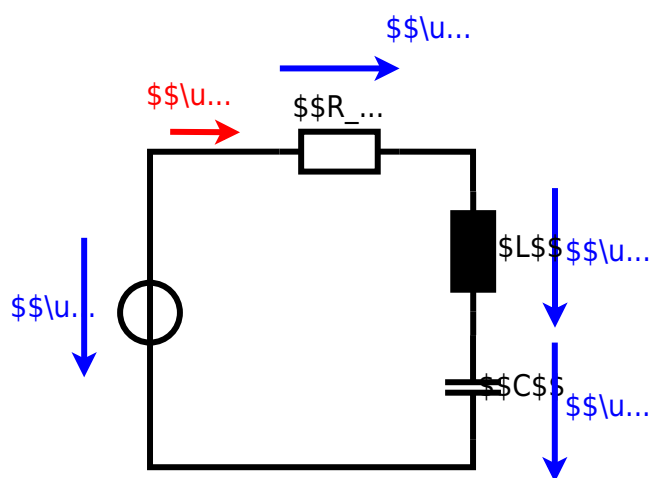

**Exercise E6 Impedances at different Frequencies**  
**(written test, approx. 18 % of a 60-minute written test, WS2022)**

2. A series circuit consists of a resistor with a resistance of  $R_1 = 1.00 \text{ k}\Omega$  and a capacitor with a capacitance of  $C_1 = 40 \text{ nF}$ . The voltage across the resistor is  $U_{R_1} = 100 \text{ V}$  at a frequency of  $f = 4 \text{ MHz}$ . Calculate the absolute value of the impedance of the capacitor  $Z_C$  and the total impedance  $Z_{\text{total}}$  of the circuit.

**Solution**

$$Z_C = \frac{1}{j\omega C_1} = \frac{1}{j \cdot 2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} = -j0.995 \text{ k}\Omega$$

$$Z_{\text{total}} = R_1 + Z_C = 1.00 \text{ k}\Omega - j0.995 \text{ k}\Omega$$

$$|Z_{\text{total}}| = \sqrt{1.00^2 + 0.995^2} \approx 1.41 \text{ k}\Omega$$

A series circuit means that the current is constant on every component.  
 The equivalent impedance for  $R_1$  and  $Z_C$  combined is given by  $Z_{\text{total}} = R_1 + Z_C$ .  
 Parallel circuit means that the voltage is the same on  $R_1$  and  $Z_C$ .  

$$U_{R_1} = I \cdot R_1 \Rightarrow I = \frac{U_{R_1}}{R_1} = \frac{100 \text{ V}}{1.00 \text{ k}\Omega} = 0.1 \text{ A}$$
  

$$U_{Z_C} = I \cdot Z_C = 0.1 \text{ A} \cdot (-j0.995 \text{ k}\Omega) = -j99.5 \text{ V}$$
  

$$|U_{Z_C}| = 99.5 \text{ V}$$
  

$$Z_C = \frac{|U_{Z_C}|}{I} = \frac{99.5 \text{ V}}{0.1 \text{ A}} = 995 \Omega = 0.995 \text{ k}\Omega$$
  
 Therefore, the resulting current of the parallel circuit is given as:  

$$I_{\text{total}} = I_{R_1} + I_{Z_C} = 0.1 \text{ A} + (-j0.1 \text{ A}) = 0.1 \text{ A} - j0.1 \text{ A}$$
  

$$|I_{\text{total}}| = \sqrt{0.1^2 + 0.1^2} = 0.141 \text{ A}$$
  
 This current is the same as the current through  $R_1$ .  

$$U_{\text{total}} = I_{\text{total}} \cdot Z_{\text{total}} = 0.141 \text{ A} \cdot 1.41 \text{ k}\Omega = 198.8 \text{ V}$$
  
 Back to the first formula: 
$$R_3 \cdot I_{R_3} = X_{L3} \cdot I_{L3}$$
  

$$R_3 = \frac{X_{L3} \cdot I_{L3}}{I_{R_3}} = \frac{2\pi f C_3 \cdot I_{L3}}{I_{R_3}}$$
  

$$R_3 = \frac{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9} \cdot 0.1}{0.1} = 1000 \Omega = 1 \text{ k}\Omega$$

**Exercise E1 Resistance of a Wire by Resistivity**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

2. For a heating element, it is required to heat the water in a tank with a volume of  $V = 180 \text{ l}$  by electric power dissipation (= heat flow) of  $P = 40 \text{ W}$  is necessary.

**Solution**

The heating element is  $l = 3 \text{ m}$  long and has a diameter of  $d = 3.57 \text{ mm}$ .  
 Calculate the resistance  $R$  of the heating element.

**Solution**

$$P = U \cdot I = R \cdot I^2 \Rightarrow I = \sqrt{\frac{P}{R}}$$

$$\sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \cdot \Omega}} \quad \text{align*}$$

$$\begin{aligned} R &= \rho \cdot l \cdot \frac{1}{A} \quad \& \quad | \quad \text{with } A = r^2 \cdot \pi = \\ &= \frac{1}{4} d^2 \cdot \pi \quad \& \quad R = \rho \cdot l \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = \\ &= 1.10 \cdot 10^{-6} \cdot \Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \cdot \text{m}}{(3.57 \cdot 10^{-3} \cdot \text{m})^2 \cdot \pi} \quad \& \quad \end{aligned}$$


**Exercise E4 Charging Capacitors**  
 (written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the light bulb) is a series of  $R_1$  and  $R_2$  and a capacitor  $C$  and a light bulb  $R_B$ . The switch  $S_1$  is open. The voltage across the capacitor is again  $0 \text{ V}$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Solution:** To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

The ideal voltage source  $U$  is in series with  $R_1$  and  $R_2$ . The voltage  $u_c$  is independent of the choice of  $R_1$  and  $R_2$ .

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .

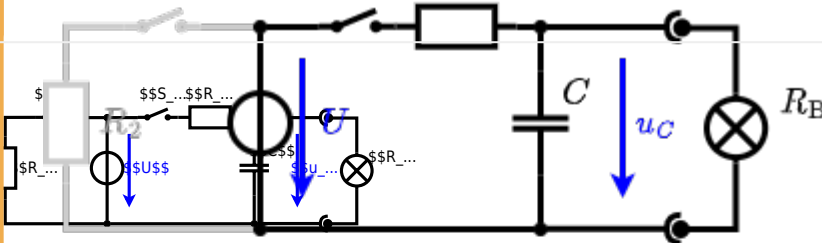


The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ }\Omega$  and a capacitor of  $C = 100 \text{ }\mu\text{F}$ .

The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first tasks. At the moment  $t_0 = 0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0) = 0 \text{ V}$ .

.. First do not consider the light bulb - it is not connected to the RC circuit.

Calculate the point of time  $t_1$  when  $u_c(t_1) = 0.5 \cdot U$ .

Solution

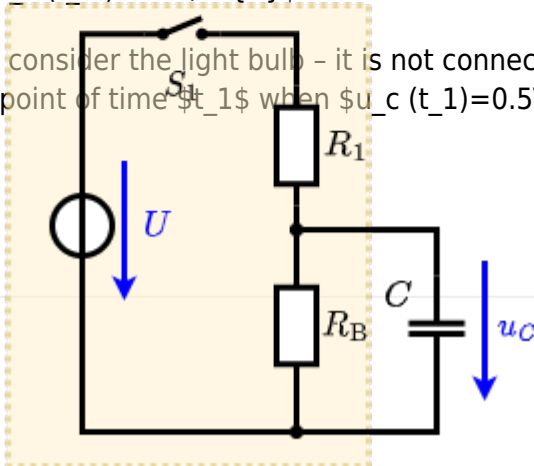

An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$  The internal resistance is given by substituting the ideal voltage source with its resistance ( $R_1 = 0 \Omega$ , short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_c(t) = U_s \cdot (1 - e^{-t/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t/(10 \Omega \cdot 100 \mu F)})$$

The following formula describes the time course of  $u_c(t)$  which has to be  $u_c(t_1) = 0.5 \cdot U$ :  

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5)$



**Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall be solved at 0.10 A,  $R_1 = R_2 = R_3 = 10 \Omega$  and the voltage  $U = 10 \text{ V}$  is given.  $R_B$ .

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.



Since  $R_2=R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between  $A$  and  $B$ .

Solution

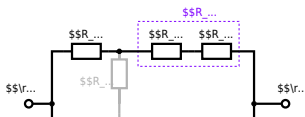

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = \{500 \sim \Omega \cdot 200 \sim \Omega\} \over {500 \sim \Omega + 200 \sim \Omega}$$

From:

<https://mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link:

[https://mexle.te.hs-heilbronn.de/electrical\\_engineering\\_1/ws2022\\_exam?rev=1680123703](https://mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1680123703)

Last update: **2023/03/29 23:01**

