

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 3

Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 6

Exercise E2 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 7

Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 7

Exercise E3 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 10

Exercise E4 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 10

Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) 11

Exercise E6 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 12

Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 14

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 18

Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 19

Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 19

Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 22

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 22


Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,

WS2022)	23
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	24

**Exercise E1 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result


$$\begin{aligned} U_{\text{S}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \Omega \end{aligned}$$

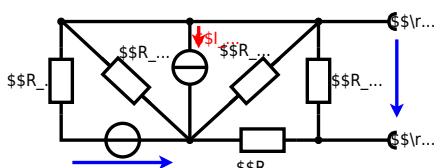


Calculated the internal resistance R_{i} and the source voltage U_{S} of an equivalent linear voltage source on the connectors A and B .
 $R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

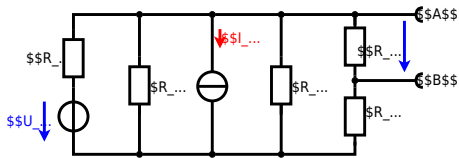

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

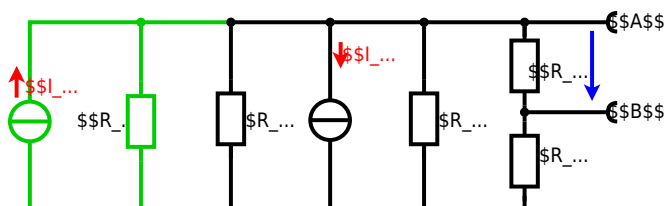

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left(\frac{U_2}{R_1} - I_4 \right) \cdot \left(R_1 || R_3 || R_5 \right)$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \left(\frac{6.0 \text{ V}}{5.0 \Omega} \right) - 4.2 \text{ A} \cdot \left(\frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator is explained with the effect of resistance on refrigeration system. The refrigerator has a resistance of 15Ω at 25°C and a 2.5Ω resistor in series with it.

Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

Result
The temperature inside the refrigeration system can reach down to -40°C .

$$R = 6.5 \text{ k}\Omega \text{ at } -40^\circ \text{C}$$

The power transfer is reduced by a factor of 10 and the heat flow is reduced by a factor of 10. Therefore, a solution is to use a heat pump.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$\text{with } \Delta T = T_{\text{end}} - T_{\text{start}} \implies R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ \text{C} - 25^\circ \text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ \text{C} - 25^\circ \text{C})^2 \right)$$

Exercise E2 Analyzing complex Impedances
 (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the complex power \underline{S} in VA, all in dB and the real and imaginary components. (\underline{S} and \underline{X}_L) shall be given.

After analysis, the full bandwidth of the circuit can be extracted and the magnitude in phase (in dB) and the phase (in $^\circ$) can be given.

Solution
 .. Calculate the physical values of the two components.
 Solution $R = 10 \text{ } \Omega$ and $X_L = 20 \text{ } \Omega$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \text{ V}}{20 \text{ } \Omega + j40 \text{ } \Omega} = \frac{50}{20 + j40} = \frac{50}{20\sqrt{2} \angle 90^\circ} = \frac{50}{28.28 \angle 90^\circ} = 1.77 \angle -90^\circ \text{ A}$$
 The voltage across the capacitor is $\underline{U}_C = \underline{I} \cdot \underline{Z}_C = 1.77 \angle -90^\circ \cdot 20 \angle 0^\circ = 35.4 \angle -90^\circ \text{ V}$
 The voltage across the inductor is $\underline{U}_L = \underline{I} \cdot \underline{Z}_L = 1.77 \angle -90^\circ \cdot j40 \angle 90^\circ = 70.8 \angle 0^\circ \text{ V}$
 The complex power is $\underline{S} = \underline{U} \cdot \underline{I}^* = 50 \angle 0^\circ \cdot 1.77 \angle 90^\circ = 88.5 \angle 90^\circ \text{ VA}$
 The real power is $P = \text{Re}(\underline{S}) = 0 \text{ W}$
 The reactive power is $Q = \text{Im}(\underline{S}) = 88.5 \text{ var}$
 The phase angle is $\varphi = \arctan\left(\frac{Q}{P}\right) = \arctan\left(\frac{88.5}{0}\right) = 90^\circ$

Exercise E1 Complex Impedance Circuit
 (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the complex power \underline{S} in VA, all in dB and the real and imaginary components. (\underline{S} and \underline{X}_L) shall be given.

After analysis, the full bandwidth of the circuit can be extracted and the magnitude in phase (in dB) and the phase (in $^\circ$) can be given.

Solution
 .. Calculate the physical values of the two components.
 Solution $R = 10 \text{ } \Omega$ and $X_L = 20 \text{ } \Omega$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \text{ V}}{20 \text{ } \Omega + j40 \text{ } \Omega} = \frac{50}{20 + j40} = \frac{50}{20\sqrt{2} \angle 90^\circ} = \frac{50}{28.28 \angle 90^\circ} = 1.77 \angle -90^\circ \text{ A}$$
 The voltage across the capacitor is $\underline{U}_C = \underline{I} \cdot \underline{Z}_C = 1.77 \angle -90^\circ \cdot 20 \angle 0^\circ = 35.4 \angle -90^\circ \text{ V}$
 The voltage across the inductor is $\underline{U}_L = \underline{I} \cdot \underline{Z}_L = 1.77 \angle -90^\circ \cdot j40 \angle 90^\circ = 70.8 \angle 0^\circ \text{ V}$
 The complex power is $\underline{S} = \underline{U} \cdot \underline{I}^* = 50 \angle 0^\circ \cdot 1.77 \angle 90^\circ = 88.5 \angle 90^\circ \text{ VA}$
 The real power is $P = \text{Re}(\underline{S}) = 0 \text{ W}$
 The reactive power is $Q = \text{Im}(\underline{S}) = 88.5 \text{ var}$
 The phase angle is $\varphi = \arctan\left(\frac{Q}{P}\right) = \arctan\left(\frac{88.5}{0}\right) = 90^\circ$



Exercise E3 Impedances at different Frequencies
(written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit consists of a resistor with a resistance of $R_1 = 1.00 \text{ k}\Omega$ and a capacitor with a capacitance of $C_1 = 40 \text{ nF}$. The voltage across the resistor is $U_{R_1} = 100 \text{ V}$ at a frequency of $f = 4 \text{ MHz}$. Calculate the absolute value of the impedance of the capacitor Z_C and the absolute value of the impedance of the resistor Z_R at this frequency.

Solution

$Z_C = \frac{1}{j\omega C_1} = \frac{1}{j \cdot 2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} = -j 0.995 \text{ k}\Omega$

$Z_R = R_1 = 1.00 \text{ k}\Omega$

A series circuit means that the current is constant on every component.

The equivalent impedance for R_1 and Z_C combined is given by $Z_{RC} = R_1 + Z_C = 1.00 \text{ k}\Omega - j 0.995 \text{ k}\Omega$

Parallel circuit means that the voltage is the same on R_2 and Z_C . $U_{R_2} = U_{Z_C} = 100 \text{ V}$

Since Z_C is perpendicular to R_2 , the resulting current of the parallel circuit is given as:

$I_{RC} = \frac{U_{R_2}}{Z_{RC}} = \frac{100 \text{ V}}{1.00 \text{ k}\Omega - j 0.995 \text{ k}\Omega} = \frac{100 \text{ V}}{\sqrt{1.00^2 + 0.995^2} \text{ k}\Omega} \cdot \frac{1.00 + j 0.995}{\sqrt{1.00^2 + 0.995^2} \text{ k}\Omega} = 70.7 \text{ mA} \cdot (0.707 + j 0.707)$

Therefore, the resulting current of the parallel circuit is given as:

$I_{RC} = 70.7 \text{ mA} \cdot (0.707 + j 0.707) = 50.0 \text{ mA} + j 50.0 \text{ mA}$

Back to the first formula: $R_3 \cdot I_{RC} = X_{C_3} \cdot I_{RC}$

$R_3 = \frac{X_{C_3} \cdot I_{RC}}{I_{RC}} = \frac{1}{\omega C_3} \cdot I_{RC} = \frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot C_3} \cdot I_{RC}$

Exercise E4 Resistance of a Wire by Resistivity
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. Heating elements are used to heat the oven with a temperature of $180 \text{ }^\circ\text{C}$. The electric power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary.

Calculate the current I needed to operate the heating elements.

The Nichrome wire has a resistivity of $\rho = 1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

Calculate the resistance R of the heating element.

Solution

$P = U \cdot I = R \cdot I^2 \Rightarrow I = \sqrt{\frac{P}{R}}$

$R = \rho \cdot \frac{l}{A} = 1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m} \cdot \frac{3 \text{ m}}{\pi \cdot (1.785 \cdot 10^{-3} \text{ m})^2} = 1.10 \cdot 10^{-6} \cdot \frac{3}{\pi \cdot 3.185 \cdot 10^{-6}} = 1.10 \cdot \frac{3}{\pi \cdot 3.185} = 0.103 \text{ }\Omega$

$I = \sqrt{\frac{40 \text{ W}}{0.103 \text{ }\Omega}} = 19.7 \text{ A}$

$$\sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \cdot \Omega}} \quad \text{align*}$$

$$\begin{aligned} R &= \rho \cdot l \cdot \frac{1}{A} \quad \& \quad | \quad \text{with } A = r^2 \cdot \pi = \\ &= \frac{1}{4} \cdot d^2 \cdot \pi \quad \& \quad \rho = \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = \\ &= 1.10 \cdot 10^{-6} \cdot \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \quad \& \quad \end{aligned}$$


Exercise E5 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the light bulb) is a series RC circuit. The capacitor is initially uncharged. At $t_0 = 0 \text{ s}$ the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

The ideal voltage source U is in series with R_1 and R_2 . The voltage u_c is independent of the choice of R_1 and R_2 .


On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting S_2 .

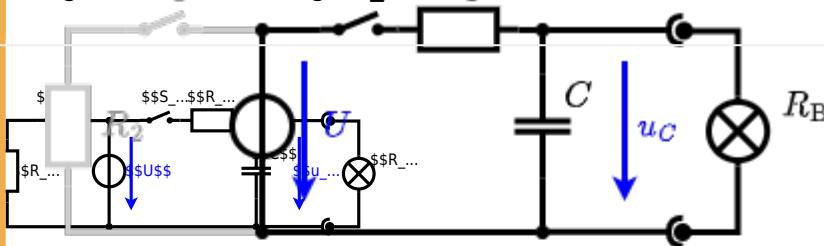

The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ }\Omega$ and a capacitor of $C = 100 \text{ }\mu\text{F}$. The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

... First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

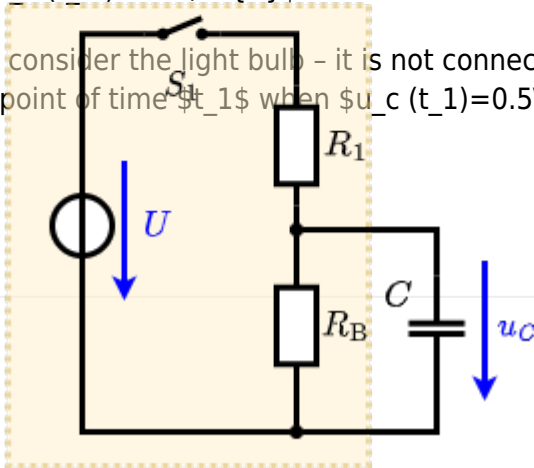

An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$ The internal resistance is given by substituting the ideal voltage source with its resistance ($R_1 = 0 \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_c(t) = U_s \cdot (1 - e^{-t/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t/(10 \cdot 100 \mu F)})$$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$: $u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$ It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$



Exercise E6 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at once, $R_1 = R_2 = R_3 = 10 \Omega$ and the voltage $U = 10V$ is given. R_B .

Solution

$$R_{eq} = 13.8 \Omega$$

Now a wye-delta transformation is necessary.



Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:

$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution




The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

**Exercise E3 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

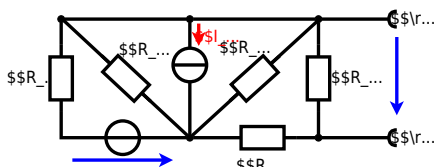


Calculate the internal resistance R_i and the source voltage U_s of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \Omega, U_2=6.0 \text{ V}, R_3= 10 \Omega, I_4=4.2 \text{ A}, R_5=10 \Omega, R_6=7.5 \Omega, R_7=15 \Omega$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

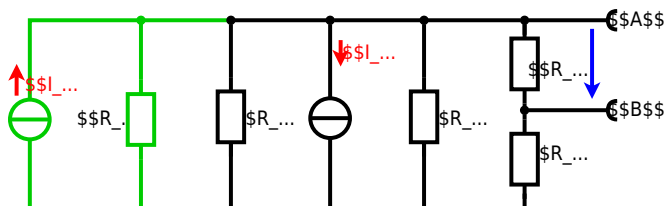

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot (R_6 || R_7)$$

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left(\frac{U_2}{R_1} - I_4 \right) \cdot \left(R_1 || R_3 || R_5 \right)$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \left(\frac{6.0 \text{ V}}{5.0 \Omega} \right) - 4.2 \Omega \cdot \left(\frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator, explained in the effect of resistance on refrigeration systems, has a resistance of 15Ω at 25°C and 2.5Ω at 0°C .

Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

Result The temperature inside the refrigeration system can reach down to -40°C .

Calculate the resistance of the thermistor at -40°C .

The power transferred to the resistor is $P = U \cdot I$ and $P = \frac{U^2}{R}$. Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

with $\Delta T = T_{\text{end}} - T_{\text{start}}$

$$R = 10 \Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

Exercise E5 Analyzing complex Impedances
 (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the complex power \underline{S} (W and VA) of the load \underline{Z}_L through the components. \underline{S}_R and \underline{S}_{X_1} shall be given.

After analysis, the full load impedance \underline{Z}_L can be extracted and brought in phasor notation $\underline{Z}_L = |Z_L| \angle \varphi_L = |Z_L| \angle (\varphi_L - \varphi_U)$

Solution
 .. Calculate the physical values of the load components.
 Solution $R = 10 \Omega$, $X_1 = 20 \Omega$, $X_2 = 20 \Omega$, $\varphi_U = 87.06^\circ$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \underline{S} = \underline{I} \underline{U} = \frac{|\underline{U}|^2}{|\underline{Z}|} \angle \varphi$$
 The voltage \underline{U} is $50 \angle 0^\circ$ V, the impedance \underline{Z} is $4.68 - j2 \Omega$.
 resulting in $\underline{I} = 10.67 \angle 34.7^\circ$ A.
 Therefore, the complex power \underline{S} is $50 \angle 0^\circ \cdot 10.67 \angle 34.7^\circ = 533.5 \angle 34.7^\circ$ VA.
 With the complex part $\underline{S} = P + jQ$, we get $P = 43.8$ W and $Q = 29.8$ var.
 The phase φ can be calculated as $\varphi = \arctan\left(\frac{-2}{4.68}\right) = -23.1^\circ$.

Exercise E7 Complex Impedance Circuit
 (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the circuit impedance \underline{Z} for a source $u(t) = 3.0 \sin(2\pi \cdot 15 \cdot t)$ V.
 The circuit consists of a resistor $R = 10 \Omega$, an inductor $L = 330 \mu\text{H}$, and a capacitor $C = 0.22 \mu\text{F}$, all in series.


Solution
 Result
 .. Draw the circuit diagram of the given circuit.

Calculate the impedance of the components, voltages, and currents.

$$\underline{Z}_R = R = 10 \Omega$$

$$\underline{Z}_L = j\omega L = j2\pi \cdot 15 \cdot 330 \cdot 10^{-6} = j3.16 \Omega$$

$$\underline{Z}_C = \frac{1}{j\omega C} = \frac{1}{j2\pi \cdot 15 \cdot 0.22 \cdot 10^{-6}} = -j154.4 \Omega$$
 Result $\underline{Z} = 10 + j3.16 - j154.4 = 10 - j151.2 \Omega$
 With $\underline{U} = 3 \angle 0^\circ$ V, the current $\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{3 \angle 0^\circ}{10 - j151.2} = 0.0198 \angle 86.3^\circ$ A.
 The complex power $\underline{S} = \underline{I} \underline{U} = 0.0198 \angle 86.3^\circ \cdot 3 \angle 0^\circ = 0.0594 \angle 86.3^\circ$ VA.
 With the complex part $\underline{S} = P + jQ$, we get $P = 0.0005$ W and $Q = 0.0593$ var.

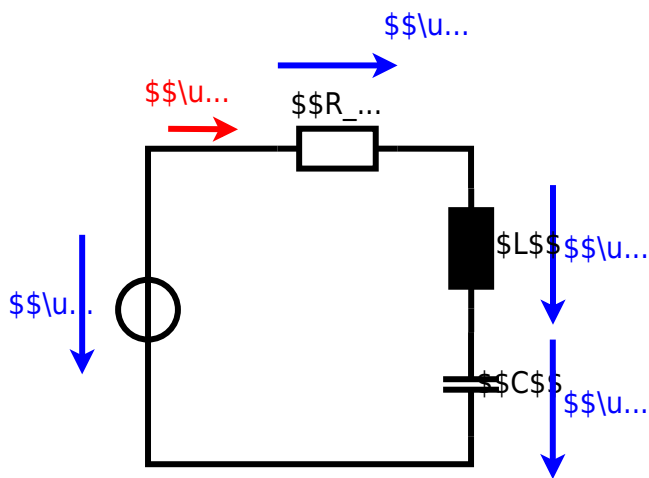

Exercise E6 Impedances at different Frequencies
(written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit consists of a resistor with a resistance of $R_1 = 1.00 \text{ k}\Omega$, a capacitor with a capacitance of $C_1 = 40 \text{ nF}$, and an inductor with an inductance of $L_1 = 4.7 \text{ }\mu\text{H}$. The circuit is connected to an AC voltage source with a voltage of $U = 10 \text{ V}$ and a frequency of $f = 4 \text{ MHz}$. Calculate the absolute value of the impedance $|Z|$ of the circuit.

Solution

$$|Z| = \sqrt{R_1^2 + (X_L - X_C)^2}$$

$$|Z| = \sqrt{(1.00 \text{ k}\Omega)^2 + (2\pi \cdot 4 \text{ MHz} \cdot 4.7 \text{ }\mu\text{H} - \frac{1}{2\pi \cdot 4 \text{ MHz} \cdot 40 \text{ nF}})^2}$$

A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $Z = R + jX_L$
 Parallel circuit means that the voltage is the same on R and C $Z = \frac{R \cdot X_C}{R + jX_C}$
 $|Z| = \frac{R \cdot X_C}{\sqrt{R^2 + X_C^2}}$ since $\underline{U} = \underline{I} \cdot \underline{Z}$ is perpendicular to \underline{I}
 $\underline{I} = \frac{\underline{U}}{\underline{Z}}$ is perpendicular to \underline{Z} (It has to, since \underline{R} is perpendicular to $\underline{X_C}$)
 $|\underline{I}| = \frac{|\underline{U}|}{|\underline{Z}|}$ $|\underline{Z}| = \frac{|\underline{U}|}{|\underline{I}|}$
 $|\underline{Z}|^2 = \frac{|\underline{U}|^2}{|\underline{I}|^2} = \frac{(10 \text{ V})^2}{(60 \text{ mA})^2} = \frac{100}{3600} = \frac{1}{36}$
 $|\underline{Z}| = \frac{1}{6} \text{ }\Omega$
 Back to the first formula: $R \cdot |\underline{I}| = |Z| \cdot |\underline{I}| \cdot \cos(\phi)$
 $R = |Z| \cdot \cos(\phi)$
 $\cos(\phi) = \frac{R}{|Z|} = \frac{1.00 \text{ k}\Omega}{\frac{1}{6} \text{ }\Omega} = 6000$
 This is not possible, so the circuit is not a series circuit.

Exercise E1 Resistance of a Wire by Resistivity
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. For a heating element used to heat the oven at a temperature of $180 \text{ }^\circ\text{C}$, an electric power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary. Calculate the current I needed to operate the heating elements.
 The Nichrome wire has a resistivity of $\rho = 1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m}$.
 The heating element is $l = 3 \text{ m}$ long and has a diameter of $d = 3.57 \text{ mm}$.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}}$$

$$R = \rho \cdot \frac{l}{A} = \rho \cdot \frac{l}{\pi \cdot \left(\frac{d}{2}\right)^2}$$

$$I = \sqrt{\frac{P}{\rho \cdot \frac{l}{\pi \cdot \left(\frac{d}{2}\right)^2}}} = \sqrt{\frac{P \cdot \pi \cdot \left(\frac{d}{2}\right)^2}{\rho \cdot l}}$$

$$I = \sqrt{\frac{40 \text{ W} \cdot \pi \cdot \left(\frac{3.57 \text{ mm}}{2}\right)^2}{1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m} \cdot 3 \text{ m}}}$$

An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$ The internal resistance is given by substituting the ideal voltage source with its resistance ($R = 0 \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_c(t) = U_s \cdot (1 - e^{-t/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t/(10 \Omega \cdot 100 \mu F)})$$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$:
$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$



Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at a rate of $R_1 = R_2 = R_3 = 10 \Omega$ and the voltage $U = 10V$ is given. R_B .

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.



Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

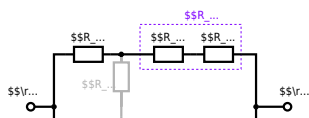

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = \{500 \sim \Omega \cdot 200 \sim \Omega\} \over {500 \sim \Omega + 200 \sim \Omega}$$

From: <https://mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link: https://mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1680124779

Last update: 2023/03/29 23:19

