

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 3

Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 6

Exercise E2 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 7

Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 7

Exercise E3 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 10

Exercise E4 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 10

Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) 11

Exercise E6 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 12

Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 14

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 18

Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 19

Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 19

Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 22

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 22

Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,


WS2022)	23
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	24

1

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result

$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \Omega \end{aligned}$$

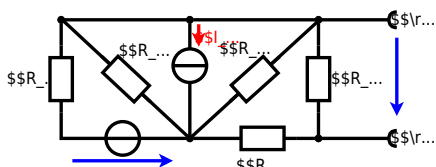


Calculate the internal resistance R_{i} and the source voltage U_{rs} of an equivalent linear voltage source on the connectors A and B .
 $R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$
Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

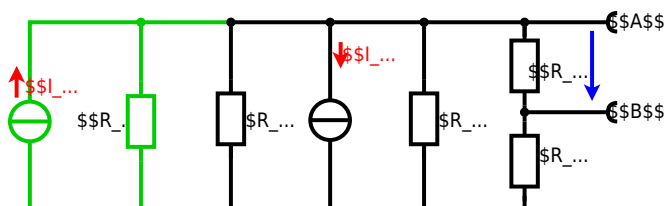

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24} = I_{24} \cdot R_{135}$$

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left(\frac{U_2}{R_1} - I_4 \right) \cdot \left(\frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right)$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \left(\frac{6.0 \text{ V}}{5.0 \Omega} \right) - 4.2 \Omega \cdot \left(\frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. The diagram explains the effect of resistance on the refrigeration system. The circuit has a resistance of 15Ω and a voltage of 6 V . Your answer.

Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$

Result: The temperature inside the refrigeration system can reach down to $-40 \text{ }^\circ\text{C}$.

Calculate the resistance of the thermistor at $-40 \text{ }^\circ\text{C}$.

The power transferred to the resistor is $P = U \cdot I$ and $Q = P \cdot t$. Therefore, a solution is to use a heat exchanger to pre-heat the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$\text{with } \Delta T = T_{\text{end}} - T_{\text{start}} \implies R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40 \text{ }^\circ\text{C} - 25 \text{ }^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40 \text{ }^\circ\text{C} - 25 \text{ }^\circ\text{C})^2 \right)$$

Exercise E2 Analyzing complex Impedances
 (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the complex power \underline{S} and the complex power factor $\cos \varphi$ in the circuit shown in the figure. The voltage $\underline{u}(t) = 30 \sqrt{2} \sin(2\pi \cdot 150 \cdot t) \text{ V}$ and the current $\underline{i}(t) = 10 \sqrt{2} \sin(2\pi \cdot 150 \cdot t - \varphi) \text{ A}$ shall be given.

After analysis, the following dimensions must be indicated, and the values extracted and brought in phase. The effective value \underline{U} and the effective value \underline{I} shall be given.

Solution
 .. Calculation of the physical values of the two components.
 Solution $\underline{R} = 10 \Omega$ and $\underline{X}_L = 20 \Omega$

Solution

$\underline{I} = \frac{\underline{U}}{\underline{Z}}$
 The voltage $\underline{u}(t) = 30 \sqrt{2} \sin(2\pi \cdot 150 \cdot t) \text{ V}$ and the current $\underline{i}(t) = 10 \sqrt{2} \sin(2\pi \cdot 150 \cdot t - \varphi) \text{ A}$ shall be given.
 resulting impedance $\underline{Z} = R + jX_L = 10 + j20 \Omega$
 Therefore, the component 10Ω is in phase with the voltage $\underline{u}(t)$ and the component $j20 \Omega$ is in phase with the current $\underline{i}(t)$.
 $\underline{S} = \underline{U} \cdot \underline{I}^* = \underline{U} \cdot \left(\frac{\underline{U}}{\underline{Z}} \right)^* = \frac{\underline{U} \cdot \underline{U}^*}{\underline{Z}^*} = \frac{|\underline{U}|^2}{\underline{Z}^*}$
 $\underline{S} = \frac{30^2}{10 - j20} = \frac{900}{10 - j20} = \frac{900(10 + j20)}{10^2 + 20^2} = \frac{900(10 + j20)}{500} = 18 + j36 \text{ VA}$
 The phase φ can be calculated as $\varphi = \arctan \left(\frac{-4.68}{0.24} \right) = -10.8^\circ$
 With the complex part $\cos \varphi = \cos(-10.8^\circ) = 0.98$
 $\varphi = \arctan \left(\frac{-4.68}{0.24} \right) = -10.8^\circ$
 The phase φ can be calculated as $\varphi = \arctan \left(\frac{-4.68}{0.24} \right) = -10.8^\circ$


Exercise E1 Complex Impedance Circuit
 (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the circuit impedance \underline{Z} for the circuit shown in the figure. The voltage $\underline{u}(t) = 3.0 \sqrt{2} \sin(2\pi \cdot 150 \cdot t) \text{ V}$ and the current $\underline{i}(t) = 1.0 \sqrt{2} \sin(2\pi \cdot 150 \cdot t - \varphi) \text{ A}$ shall be given.

A linear source is connected with an inductor of $330 \mu\text{H}$ and a capacitor of $0.22 \mu\text{F}$, all in series.

Solution
 Result
 .. Draw the circuit diagram of the given circuit.
 Label all components, voltages, and currents.

$\underline{Z} = \frac{\underline{U}}{\underline{I}} = \frac{3.0 \sqrt{2}}{1.0 \sqrt{2}} = 3 \Omega$
 $\underline{Z}_C = \frac{1}{j\omega C} = \frac{1}{j \cdot 2\pi \cdot 150 \cdot 0.22 \cdot 10^{-6}} = -j19.2 \Omega$
 $\underline{Z}_L = j\omega L = j \cdot 2\pi \cdot 150 \cdot 330 \cdot 10^{-6} = j31.7 \Omega$
 $\underline{Z} = \underline{Z}_C + \underline{Z}_L = -j19.2 \Omega + j31.7 \Omega = j12.5 \Omega$

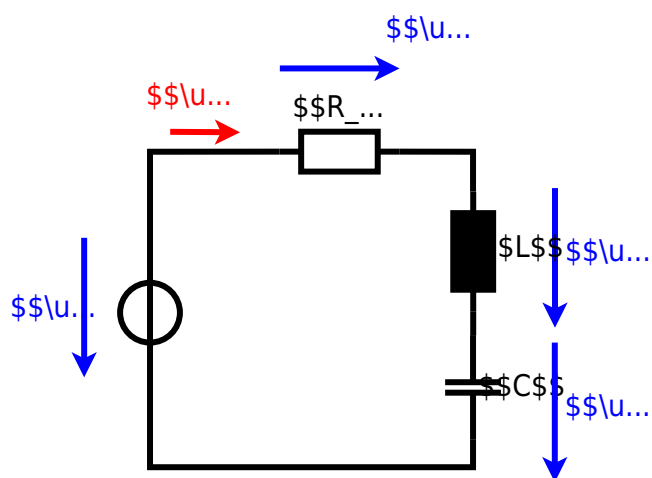

Exercise E3 Impedances at different Frequencies
(written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit consists of a resistor with a resistance of $R_1 = 1.00 \text{ k}\Omega$, a capacitor with a capacitance of $C_1 = 40 \text{ nF}$, and an inductor with an inductance of $L_1 = 4.7 \text{ }\mu\text{H}$. The circuit is connected to an AC voltage source with a voltage of $U = 10 \text{ V}$ and a frequency of $f = 4 \text{ MHz}$. Calculate the absolute value of the impedance $|Z|$ of the circuit.

Solution

$$|Z| = \sqrt{R_1^2 + (X_L - X_C)^2}$$

$$|Z| = \sqrt{(1.00 \text{ k}\Omega)^2 + (2\pi \cdot 4 \text{ MHz} \cdot 4.7 \text{ }\mu\text{H} - \frac{1}{2\pi \cdot 4 \text{ MHz} \cdot 40 \text{ nF}})^2}$$

A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $Z = R + jX_L$
 Parallel circuit means that the voltage is the same on R and C .
 $Z = \frac{R \cdot X_C}{R + jX_C}$
 $Z = \frac{R \cdot X_C}{R + jX_C} \cdot \frac{R - jX_C}{R - jX_C} = \frac{R^2 - jRX_C + jRX_C - X_C^2}{R^2 + X_C^2}$
 $Z = \frac{R^2 - X_C^2}{R^2 + X_C^2}$
 Therefore, the resulting current of the parallel circuit is given as:
 $I = \frac{U}{Z} = \frac{U \cdot (R^2 + X_C^2)}{R^2 - X_C^2}$
 This can be simplified to $I = \frac{U \cdot (R^2 + X_C^2)}{R^2 - X_C^2}$
 Back to the first formula: $|Z| = \sqrt{R^2 + (X_L - X_C)^2}$
 $|Z| = \sqrt{(1.00 \text{ k}\Omega)^2 + (2\pi \cdot 4 \text{ MHz} \cdot 4.7 \text{ }\mu\text{H} - \frac{1}{2\pi \cdot 4 \text{ MHz} \cdot 40 \text{ nF}})^2}$

Exercise E4 Resistance of a Wire by Resistivity
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A heating element made of nichrome wire with a diameter of $d = 0.5 \text{ mm}$ is used for heating. The power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary. Calculate the current I needed to operate the heating element.
 The nichrome wire has a resistivity of $\rho = 1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m}$.
 The heating element is $l = 3 \text{ m}$ long and has a diameter of $d = 0.5 \text{ mm}$.
 Calculate the resistance R of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}}$$

$$\sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \cdot \Omega}} \quad \text{align*}$$

$$\begin{aligned} R &= \rho \cdot l \cdot \frac{1}{A} \quad \& \quad | \quad \text{with } A = r^2 \cdot \pi = \\ &= \frac{1}{4} \cdot d^2 \cdot \pi \quad \& \quad \rho = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = \\ &= 1.10 \cdot 10^{-6} \cdot \Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \cdot \text{m}}{(3.57 \cdot 10^{-3} \cdot \text{m})^2 \cdot \pi} \quad \& \quad \end{aligned}$$


Exercise E5 Charging Capacitors
 (written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the light bulb) is a series RC circuit. The capacitor is initially uncharged. At $t_0 = 0 \text{ s}$ the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

The ideal voltage source U is in series with R_1 and R_2 . The voltage u_c is independent of the choice of R_1 and R_2 .

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting S_2 .

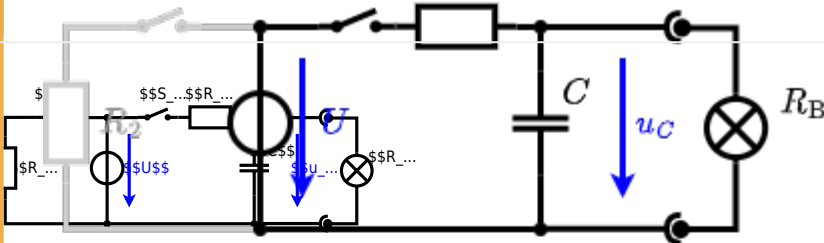


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ }\Omega$ and a capacitor of $C = 100 \text{ }\mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

... First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

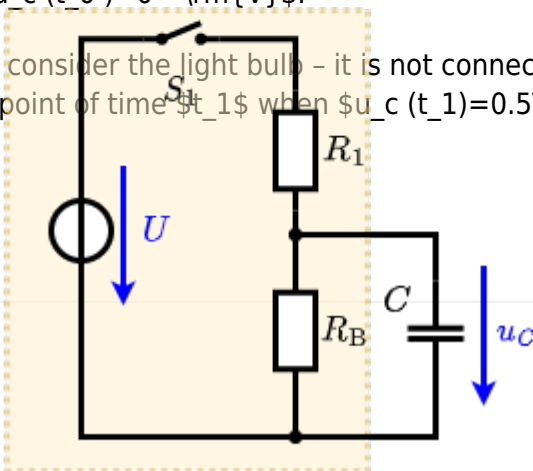

An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$ The internal resistance is given by substituting the ideal voltage source with its resistance ($R_1 = 0 \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_c(t) = U_s \cdot (1 - e^{-t/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t/(10 \Omega \cdot 100 \mu F)})$$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$



Exercise E6 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0.1 A, $R_1 = 10 \Omega$, $R_2 = 15 \Omega$, $R_3 = 10 \Omega$, $R_4 = 10 \Omega$ and the voltage $U = 10 V$ is given. R_B .

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.



Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:

$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution



The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega}$$

**Exercise E3 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$




Calculate the internal resistance R_{in} and the source voltage U_{s} of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3=10 \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$. Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

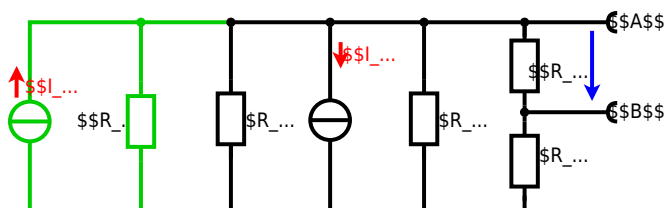

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_{24}}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24}$$

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 || R_3 || R_5$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \left(\frac{6.0 \text{ V}}{5.0 \Omega} \right) - 4.2 \Omega \cdot \left(\frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator is explained with the effect of resistance on refrigeration systems. The circuit has a resistance of 15Ω and a voltage of 6 V . Your answer:

Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$

Result
The temperature inside the refrigeration system can reach down to $-40 \text{ }^\circ\text{C}$.

Calculate the resistance of the thermistor at $-40 \text{ }^\circ\text{C}$.

The power of the resistor is $P = U \cdot I$ and $I = \frac{U}{R}$. Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

with $\Delta T = T_{\text{end}} - T_{\text{start}}$

$$R = 10 \Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40 \text{ }^\circ\text{C} - 25 \text{ }^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40 \text{ }^\circ\text{C} - 25 \text{ }^\circ\text{C})^2 \right)$$

Exercise E5 Analyzing complex Impedances
 (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the complex power \underline{S} (W and var) of the load \underline{Z}_L through the components. (\underline{S} and \underline{X}_L) shall be given.

After analysis, the full load impedance \underline{Z}_L can be extracted and brought in phasor notation $\underline{Z}_L = |Z_L| \cdot e^{j\varphi}$ with $\varphi = \varphi(\underline{Z}_L) = \varphi(\underline{U}) - \varphi(\underline{I})$.

Solution
 .. Calculate the physical values of the load components.
 Solution $\underline{Z}_L = \frac{\underline{U}}{\underline{I}} = \frac{10 \angle 0^\circ}{0.2 \angle -28.7^\circ} = 50 \angle 28.7^\circ \Omega$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{\frac{50 \angle 28.7^\circ}{0.2}} = 0.2 \angle -28.7^\circ \text{ A}$$
 The voltage \underline{U} is the phasor $\underline{U} = 10 \angle 0^\circ \text{ V}$.
 The resulting impedance $\underline{Z}_L = 50 \angle 28.7^\circ \Omega$.
 The real part $R = 43.8 \Omega$ and the imaginary part $X_L = 24.6 \Omega$.
 The complex power $\underline{S} = \underline{U} \cdot \underline{I}^* = 10 \angle 0^\circ \cdot 0.2 \angle 28.7^\circ = 2 \angle 28.7^\circ \text{ VA}$.
 The real power $P = 1.74 \text{ W}$ and the reactive power $Q = 0.98 \text{ var}$.
 The phase $\varphi = 28.7^\circ$.
 With the complex part $\underline{Z}_L = R + jX_L = 43.8 + j24.6 \Omega$.
 The phase φ can be calculated as $\varphi = \arctan\left(\frac{X_L}{R}\right) = \arctan\left(\frac{24.6}{43.8}\right) = 28.7^\circ$.

Exercise E7 Complex Impedance Circuit
 (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the circuit impedance \underline{Z} for a source $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t) \text{ V}$.
 The circuit consists of a resistor $R = 10 \Omega$, an inductor $L = 330 \mu\text{H}$, and a capacitor $C = 0.22 \mu\text{F}$, all in series.

Solution

Result
 .. Draw the circuit diagram of the given circuit.
 The impedance $\underline{Z} = R + j\omega L - j\omega C = 10 + j(2\pi \cdot 15 \cdot 330 \cdot 10^{-6}) - j(2\pi \cdot 15 \cdot 0.22 \cdot 10^{-6}) = 10 + j0.0314 - j0.002 = 10 + j0.0294 \Omega$.

Result $\underline{Z} = 10 + j0.0294 \Omega$

With $\underline{Z} = 10 + j0.0294 \Omega$, the magnitude $|Z| = \sqrt{10^2 + 0.0294^2} \approx 10 \Omega$.
 The phase $\varphi = \arctan\left(\frac{0.0294}{10}\right) \approx 0.17^\circ$.



Exercise E6 Impedances at different Frequencies
(written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit consists of a resistor with a resistance of $R_1 = 1.00 \text{ k}\Omega$, a capacitor with a capacitance of $C_1 = 40 \text{ nF}$, and an inductor with an inductance of $L_1 = 4.7 \text{ }\mu\text{H}$. The circuit is connected to an AC voltage source with a voltage of $U = 10 \text{ V}$ and a frequency of $f = 4 \text{ MHz}$. Calculate the absolute value of the impedance $|Z|$ of the circuit.

Solution

$$|Z| = \sqrt{R^2 + (X_L - X_C)^2}$$

$$|Z| = \sqrt{(1.00 \text{ k}\Omega)^2 + (2\pi \cdot 4 \text{ MHz} \cdot 4.7 \text{ }\mu\text{H} - \frac{1}{2\pi \cdot 4 \text{ MHz} \cdot 40 \text{ nF}})^2}$$

A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $Z = R + jX_L$
 Parallel circuit means that the voltage is the same on R and C $Z = \frac{R \cdot X_C}{R + jX_C}$
 $|Z| = \frac{R \cdot X_C}{\sqrt{R^2 + X_C^2}}$
 $|Z| = \frac{1.00 \text{ k}\Omega \cdot 10 \text{ }\Omega}{\sqrt{(1.00 \text{ k}\Omega)^2 + (10 \text{ }\Omega)^2}} \approx 10 \text{ }\Omega$
 Therefore, the resulting current of the parallel circuit is given as:
 $I = \frac{U}{|Z|} = \frac{10 \text{ V}}{10 \text{ }\Omega} = 1 \text{ A}$
 This current is the same as the current through the inductor and capacitor.
 $I = 1 \text{ A}$
 Back to the first formula:
 $|Z| = \sqrt{R^2 + (X_L - X_C)^2}$
 $|Z| = \sqrt{(1.00 \text{ k}\Omega)^2 + (2\pi \cdot 4 \text{ MHz} \cdot 4.7 \text{ }\mu\text{H} - \frac{1}{2\pi \cdot 4 \text{ MHz} \cdot 40 \text{ nF}})^2}$

Exercise E1 Resistance of a Wire by Resistivity
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. For a heating element used to heat the oven with a temperature of $180 \text{ }^\circ\text{C}$, an electric power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary.
 Calculate the current I needed to operate the heating elements.
 The Nichrome wire has a resistivity of $\rho = 1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m}$.
 The heating element is $l = 3 \text{ m}$ long and has a diameter of $d = 3.57 \text{ mm}$.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}}$$

$$R = \rho \cdot \frac{l}{A} = \rho \cdot \frac{l}{\pi \cdot (\frac{d}{2})^2}$$

$$I = \sqrt{\frac{P \cdot \pi \cdot (\frac{d}{2})^2}{\rho \cdot l}}$$

$$I = \sqrt{\frac{40 \text{ W} \cdot \pi \cdot (\frac{3.57 \text{ mm}}{2})^2}{1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m} \cdot 3 \text{ m}}}$$

$$\sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \cdot \Omega}} \quad \text{align*}$$

$$\begin{aligned} R &= \rho \cdot l \cdot \frac{1}{A} \quad \& \quad | \quad \text{with } A = r^2 \cdot \pi = \\ &= \frac{1}{4} \cdot d^2 \cdot \pi \quad \& \quad \rho = \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = \\ &= 1.10 \cdot 10^{-6} \cdot \Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \cdot \text{m}}{(3.57 \cdot 10^{-3} \cdot \text{m})^2 \cdot \pi} \quad \& \quad \end{aligned}$$


Exercise E4 Charging Capacitors
 (written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the light bulb) is a series of R_1 and R_2 and a capacitor C and a switch S_1 and a switch S_2 . The voltage across the capacitor is again 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

The ideal voltage source U is in series with R_1 and R_2 . The voltage u_c is independent of this series $(U - I \cdot R_2)^2$.

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting S_2 .

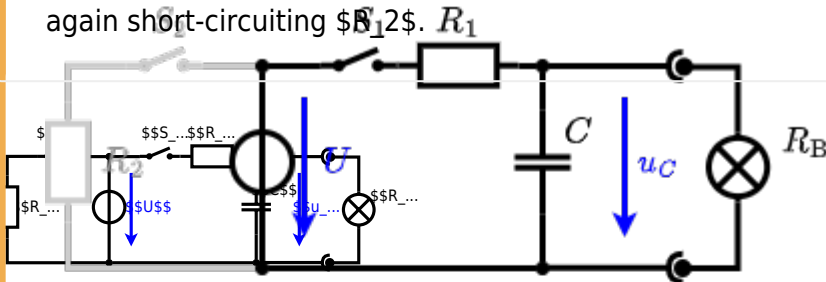


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \Omega$ and a capacitor of $C = 100 \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

.. First do not consider the light bulb - it is not connected to the RC circuit.

Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

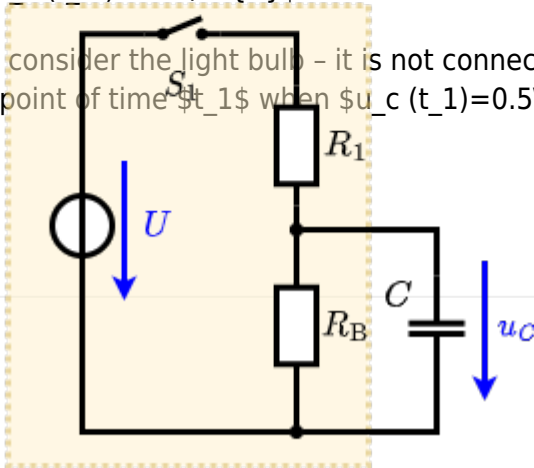

An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$ The internal resistance is given by substituting the ideal voltage source with its resistance ($R_1 = 0 \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_c(t) = U_s \cdot (1 - e^{-t/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t/(10 \Omega \cdot 100 \mu F)})$$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to t :

$$(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5)$$



Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at once, $R_1 = R_2 = R_3 = 10 \Omega$ and the voltage $U = 10V$ is given. R_B .

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.




Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:
$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

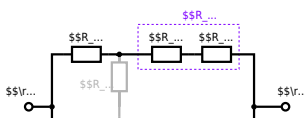

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = \{500 \sim \Omega \parallel (200 \sim \Omega) \parallel R_{\text{eq}}\} \parallel \{500 \sim \Omega \cdot 200 \sim \Omega\} \over {500 \sim \Omega + 200 \sim \Omega}$$

From:

<https://mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link:

https://mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1680125504

Last update: **2023/03/29 23:31**

