

# Exam Winter Semester 2022

## Student Group

| First Name | Surname | Matrikel Nr. |
|------------|---------|--------------|
|            |         |              |
|            |         |              |
|            |         |              |

## Table of Contents

|   |    |
|---|----|
| Exercise E4 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) .....   | 3  |
| Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) .....   | 3  |
| Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) .....      | 3  |
| Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) .....      | 4  |
| Exercise E6 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) ..... | 5  |
| Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) ..... | 6  |
| Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) .....             | 8  |
| Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) .....             | 12 |
| Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) .....                  | 16 |
| Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) .....                  | 17 |
| Exercise E2 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) .....         | 19 |
| Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) .....         | 19 |
| Exercise E3 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) .....  | 20 |
| Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) .....  | 20 |
| Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) .....            |    |

---

|  |    |
|--|----|
| test, WS2022) .....  | 21 |
| Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) ..... | 24 |

### Exercise E4 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

A heating element made of solid nichrome wire with a diameter of  $1.80 \text{ mm}$  is used for electric power dissipation (= heat flow) of  $P=40 \text{ W}$  is necessary.

Determine the current  $I$  needed to operate for heating elements.

The Nichrome wire has a resistivity of  $1.10 \cdot 10^{-6} \text{ } \Omega \text{ m}$ .

The heating element is  $3 \text{ m}$  long and has a diameter of  $3.57 \text{ mm}$ .

∴ Calculate the resistance  $R$  of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \\ &= \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad \text{with } A = r^2 \cdot \pi = \\ &= \frac{1}{4} d^2 \cdot \pi \quad | \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad | \quad R = \\ &= 1.10 \cdot 10^{-6} \text{ } \Omega \text{ m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

### Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

A heating element made of solid nichrome wire with a diameter of  $1.80 \text{ mm}$  is used for electric power dissipation (= heat flow) of  $P=40 \text{ W}$  is necessary.

Determine the current  $I$  needed to operate for heating elements.

The Nichrome wire has a resistivity of  $1.10 \cdot 10^{-6} \text{ } \Omega \text{ m}$ .

The heating element is  $3 \text{ m}$  long and has a diameter of  $3.57 \text{ mm}$ .

∴ Calculate the resistance  $R$  of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \\ &= \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad \text{with } A = r^2 \cdot \pi = \\ &= \frac{1}{4} d^2 \cdot \pi \quad | \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad | \quad R = \\ &= 1.10 \cdot 10^{-6} \text{ } \Omega \text{ m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

### Exercise E1 Temperature-dependent Resistance

**(written test, approx. 6 % of a 60-minute written test, WS2022)**

2. The diagram shows a thermistor with a resistance of  $R_0 = 10 \text{ k}\Omega$  at  $T_0 = 25^\circ\text{C}$ . The thermistor has a resistance coefficient of  $\alpha = 0.01 \text{ K}^{-1}$  and a second-order coefficient of  $\beta = 71 \text{ K}^{-2}$ . Calculate the resistance of the thermistor at  $T = -40^\circ\text{C}$ .

Result: The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$R = 10 \text{ k}\Omega \cdot (1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2)$$

**Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)**

2. The diagram shows a thermistor with a resistance of  $R_0 = 10 \text{ k}\Omega$  at  $T_0 = 25^\circ\text{C}$ . The thermistor has a resistance coefficient of  $\alpha = 0.01 \text{ K}^{-1}$  and a second-order coefficient of  $\beta = 71 \text{ K}^{-2}$ . Calculate the resistance of the thermistor at  $T = -40^\circ\text{C}$ .

Result: The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$R = 10 \text{ k}\Omega \cdot (1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2)$$

**Exercise E6 Pure Resistor Network Simplification**  
**(written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall be solved at once,  $R_2 = R_3 = 100 \Omega$  and the switch shall be open. Calculate the equivalent resistance  $R_{eq}$  between  $A$  and  $B$ .

Solution

$$R_{eq} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.



Since  $R_2 = R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as:


$$R_Y = \frac{R_2 \cdot R_3}{R_2 + R_3} = \frac{100 \cdot 100}{100 + 100} = 50 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{eq} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) \parallel (R_Y + R_3)$$

.. The switch shall now be open. Calculate the equivalent resistance  $R_{eq}$  between  $A$  and  $B$ .

Solution

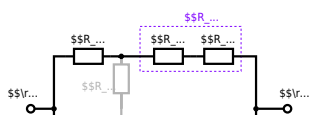

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel (500 \Omega) \parallel (200 \Omega) \parallel (500 \Omega \cdot 200 \Omega) / (500 \Omega + 200 \Omega)$$

**Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall be solved with  $R_1 = 200 \Omega$ ,  $R_2 = R_3 = 100 \Omega$  and the source  $B = 10 \text{ V}$ . Result given:  $R_{\text{eq}} = B$ .

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.




Since  $R_2=R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as: 
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series: 
$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{eq}$  between A and B.

Solution

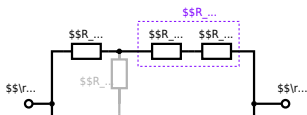

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

**Exercise E1 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$



Calculate the internal resistance  $R_i$  and the source voltage  $U_s$  of an equivalent linear voltage source on the connectors  $A$  and  $B$ .  $R_1=5.0 \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3= 10 \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \Omega$ ,  $R_6=7.5 \Omega$ ,  $R_7=15 \Omega$  Use equivalent sources in order to simplify the circuit!

### Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :



Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following:

$$U_{24} = I_{24} \cdot (R_6 || R_7)$$

$$U_{24} = U_2 \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - I_4 \cdot \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0\Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$


with  $R_1 || R_3 || R_5 = 5\Omega || 10\Omega || 10\Omega = 5\Omega || 5\Omega = 2.5\Omega$ :

$$U_{AB} = \frac{6.0\text{V}}{5.0\Omega} - 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \\ R_{AB} = 15\Omega || (7.5\Omega + 2.5\Omega)$$

### Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.  
Result

$$U_s = U_{AB} = 4.5\text{V} \\ R_i = R_{AB} = 6\Omega$$

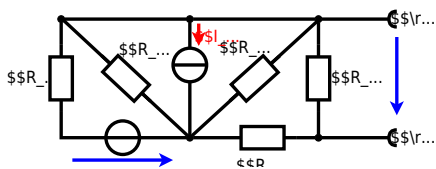


Calculate the internal resistance  $R_{in}$  and the source voltage  $U_{s}$  of an equivalent linear voltage source on the connectors  $A$  and  $B$ .  
 $R_1=5.0 \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3= 10 \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \Omega$ ,  $R_6=7.5 \Omega$ ,  $R_7=15 \Omega$   
 Use equivalent sources in order to simplify the circuit!

### Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

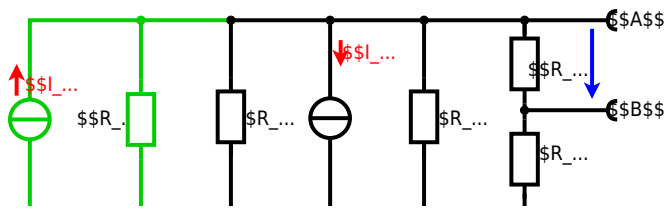

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ : 
$$R_{135} = R_1 || R_3 || R_5$$
 
$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following: 
$$U_{24}$$

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - (U_2 \cdot \frac{1}{R_1} - I_4) \cdot \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \Omega \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega}$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

**Exercise E5 Charging Capacitors**  
**(written test, approx. 16 % of a 60-minute written test, WS2022)**

The circuit below is a battery with an internal resistance of  $R_1 = 5 \Omega$  and a charging capacitor  $C = 2 \mu\text{F}$  connected in parallel with a resistor  $R_2 = 10 \Omega$ . The voltage across the capacitor is again  $0 \text{ V}$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Result:** To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

**Solution:** The ideal voltage source  $U_{eq}$  is given by  $U_{eq} = U \cdot \frac{R_2}{R_1 + R_2} = 12 \text{ V} \cdot \frac{10 \Omega}{5 \Omega + 10 \Omega} = 8 \text{ V}$

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .



The circuit contains a voltage source  $U=12\text{ V}$ , a switch  $S_1$ , a resistor of  $R_1=20\text{ }\Omega$  and a capacitor of  $C=100\text{ }\mu\text{F}$ . The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first task. At the moment  $t_0=0\text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0)=0\text{ V}$ .



First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time  $t_1$  when  $u_c(t_1)=0.5 \cdot U$ .

Solution



So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_c(t)$  which has to be  $u_c(t_1)=0.5 \cdot U$ :  

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5$   
 An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$  and  $R_B$  as seen in yellow:  

$$U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$$
 The internal resistance is given by substituting the ideal voltage source with its resistance ( $r=0\text{ }\Omega$ , short-circuit).  

$$R_i = R_1 \parallel R_B = 10\text{ }\Omega$$

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$   
 The internal resistance is given by substituting the ideal voltage source with its resistance ( $r=0\text{ }\Omega$ , short-circuit).  

$$R_i = R_1 \parallel R_B = 10\text{ }\Omega$$
  

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1\text{ ms}/(10\text{ }\Omega \cdot 100\text{ }\mu\text{F})})$$

**Exercise E4 Charging Capacitors**  
 (written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (as shown in the figure) consists of a DC voltage source  $U=6\text{ V}$ , a resistor  $R_1=20\text{ }\Omega$ , a capacitor  $C=20\text{ }\mu\text{F}$  and a light bulb  $R_B=10\text{ }\Omega$ . The switch  $S_1$  is open. The voltage across the capacitor is again  $0\text{ V}$  at the moment  $t_0=0\text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2=1\text{ ms}$  after closing the switch.

**Solution** To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_B$ .  

$$U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{2}{3} \cdot U = 4\text{ V}$$

$$R_i = R_1 \parallel R_B = \frac{20 \cdot 10}{20 + 10} = 6.67\text{ }\Omega$$

Solution

The ideal voltage source is  $U = 12 \text{ V}$ . The internal resistance is  $R_1 = 20 \text{ }\Omega$ . The voltage across the capacitor is  $u_C(t)$ . The voltage across the light bulb is  $u_B(t)$ . The voltage across the resistor  $R_2$  is  $u_{R_2}(t)$ . The voltage across the capacitor is  $u_C(t)$ . The voltage across the light bulb is  $u_B(t)$ . The voltage across the resistor  $R_2$  is  $u_{R_2}(t)$ .


On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .



The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ }\Omega$  and a capacitor of  $C = 100 \text{ }\mu\text{F}$ .

The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first asks. At the moment  $t_0 = 0$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_C(t_0) = 0$ .

First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time  $t_1$  when  $u_C(t_1) = 0.5 \cdot U$ .

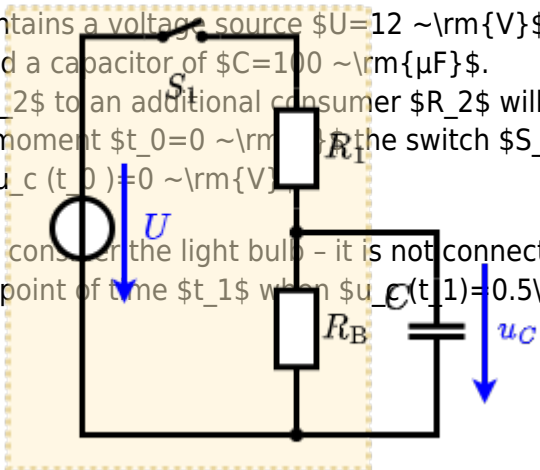

Solution

An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$ . The internal resistance is given by substituting the ideal voltage source with its resistance ( $R = 0 \text{ }\Omega$ , short-circuit).  $R_i = R_1 \parallel R_B = 10 \text{ }\Omega$ .

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2 / (R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t_2 / (10 \text{ }\Omega \cdot 100 \text{ }\mu\text{F})})$$

So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_C(t)$  which has to be  $u_C(t_1) = 0.5 \cdot U$ :  $u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$ . It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$

**Exercise E2 Analyzing complex Impedances**  
 (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Given that the phasor voltage source  $\underline{U} = 50 \angle 0^\circ \text{ V}$  and the admittance  $\underline{Y} = 0.24 \text{ S}$  are both in the components. ( $\$R\$$  and  $\$X_L\$$ ) shall be given.

After analysis, the full width dimensioned complex impedance  $\underline{Z}$  shall be extracted and the magnitude  $|Z|$  in phase  $\varphi$  shall be given.  $\underline{Z} = (2 + j4) \Omega$

Solution  
 .. Calculation of physical values of the two components.  
 Solution 
$$R = \frac{1}{\text{Re}\{Y\}} = \frac{1}{0.24} = 4.167 \Omega \quad X_L = \frac{1}{\text{Im}\{Y\}} = \frac{1}{-0.06} = -16.667 \Omega$$

Solution  

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{(2 + j4) \Omega} = 12.5 \angle -63.4^\circ \text{ A}$$
 The current  $I$  has a magnitude of  $12.5 \text{ A}$  and a phase angle of  $-63.4^\circ$ .  
 The voltage  $U$  is  $50 \text{ V}$  and the admittance  $Y$  is  $0.24 \text{ S}$ .  
 The resulting impedance  $Z$  is  $\frac{1}{Y} = \frac{1}{0.24} = 4.167 \Omega$ .  
 The real part is  $4.167 \Omega$  and the imaginary part is  $-16.667 \Omega$ .  
 The magnitude of  $Z$  is  $|Z| = \sqrt{4.167^2 + (-16.667)^2} = 17.1 \Omega$ .  
 The phase of  $Z$  is  $\varphi = \arctan\left(\frac{-16.667}{4.167}\right) = -75.96^\circ$ .  
 With the complex part  $Z = 4.167 - j16.667 \Omega$ , the magnitude  $|Z|$  and phase  $\varphi$  can be calculated as  

$$|Z| = \sqrt{4.167^2 + (-16.667)^2} = 17.1 \Omega$$

$$\varphi = \arctan\left(\frac{-16.667}{4.167}\right) = -75.96^\circ$$

**Exercise E5 Analyzing complex Impedances**  
 (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Given that the phasor voltage source  $\underline{U} = 50 \angle 0^\circ \text{ V}$  and the admittance  $\underline{Y} = 0.24 \text{ S}$  are both in the components. ( $\$R\$$  and  $\$X_L\$$ ) shall be given.

After analysis, the full width dimensioned complex impedance  $\underline{Z}$  shall be extracted and the magnitude  $|Z|$  in phase  $\varphi$  shall be given.  $\underline{Z} = (2 + j4) \Omega$

Solution  
 .. Calculation of physical values of the two components.  
 Solution 
$$R = \frac{1}{\text{Re}\{Y\}} = \frac{1}{0.24} = 4.167 \Omega \quad X_L = \frac{1}{\text{Im}\{Y\}} = \frac{1}{-0.06} = -16.667 \Omega$$

Solution  

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{(2 + j4) \Omega} = 12.5 \angle -63.4^\circ \text{ A}$$
 The current  $I$  has a magnitude of  $12.5 \text{ A}$  and a phase angle of  $-63.4^\circ$ .  
 The voltage  $U$  is  $50 \text{ V}$  and the admittance  $Y$  is  $0.24 \text{ S}$ .  
 The resulting impedance  $Z$  is  $\frac{1}{Y} = \frac{1}{0.24} = 4.167 \Omega$ .  
 The real part is  $4.167 \Omega$  and the imaginary part is  $-16.667 \Omega$ .  
 The magnitude of  $Z$  is  $|Z| = \sqrt{4.167^2 + (-16.667)^2} = 17.1 \Omega$ .  
 The phase of  $Z$  is  $\varphi = \arctan\left(\frac{-16.667}{4.167}\right) = -75.96^\circ$ .



**Resistor values**  $20 = 450 \text{ kHz}$   $4.7 \sim \mu\text{H}$   $30 \sim \mu\text{F}$   $330 \sim \mu\text{H}$   $10 \sim \text{mA}$   
 A series circuit means that the current is constant on every component.  
 The equivalent impedance for  $R$  and  $L$  combined is given by  $Z = R + j\omega L$   
 Parallel circuit means that the voltage is the same on  $R_1$  and  $R_2$   
 $\frac{1}{Z} = \frac{1}{R_1} + \frac{1}{R_2}$   
 Since  $L$  and  $C$  are perpendicular to  $R$ , this can be simplified to  $Z = R + j(\omega L - \frac{1}{\omega C})$   
 It has to, since  $R$  is perpendicular to  $j\omega L$  and  $-\frac{j}{\omega C}$   
 $Z^2 = R^2 + (\omega L - \frac{1}{\omega C})^2$   
 Therefore, the resulting current of the parallel circuit is given as:  
 $I = \frac{U}{Z}$   
 This can be rearranged to get  $I = \frac{U}{\sqrt{R^2 + (\omega L - \frac{1}{\omega C})^2}}$   
 $I = \frac{3.0}{\sqrt{10^2 + (2\pi \cdot 450 \cdot 4.7 \cdot 10^{-6} - \frac{1}{2\pi \cdot 450 \cdot 30 \cdot 10^{-6}})^2}}$   
 Back to the first formula:  $R_3 \cdot I = X_C \cdot I$   
 $R_3 = \frac{X_C \cdot I}{I} = \frac{1}{2\pi \cdot f \cdot C} \cdot \frac{1}{I} = \frac{1}{2\pi \cdot 450 \cdot 30 \cdot 10^{-6} \cdot 0.1}$

|   |
|---|
| <p>Resistor values <math>20 = 450 \text{ kHz}</math> <math>4.7 \sim \mu\text{H}</math> <math>30 \sim \mu\text{F}</math> <math>330 \sim \mu\text{H}</math> <math>10 \sim \text{mA}</math><br/>                 A series circuit means that the current is constant on every component.<br/>                 The equivalent impedance for <math>R</math> and <math>L</math> combined is given by <math>Z = R + j\omega L</math><br/>                 Parallel circuit means that the voltage is the same on <math>R_1</math> and <math>R_2</math><br/> <math>\frac{1}{Z} = \frac{1}{R_1} + \frac{1}{R_2}</math><br/>                 Since <math>L</math> and <math>C</math> are perpendicular to <math>R</math>, this can be simplified to <math>Z = R + j(\omega L - \frac{1}{\omega C})</math><br/>                 It has to, since <math>R</math> is perpendicular to <math>j\omega L</math> and <math>-\frac{j}{\omega C}</math><br/> <math>Z^2 = R^2 + (\omega L - \frac{1}{\omega C})^2</math><br/>                 Therefore, the resulting current of the parallel circuit is given as:<br/> <math>I = \frac{U}{Z}</math><br/>                 This can be rearranged to get <math>I = \frac{U}{\sqrt{R^2 + (\omega L - \frac{1}{\omega C})^2}}</math><br/> <math>I = \frac{3.0}{\sqrt{10^2 + (2\pi \cdot 450 \cdot 4.7 \cdot 10^{-6} - \frac{1}{2\pi \cdot 450 \cdot 30 \cdot 10^{-6}})^2}}</math><br/>                 Back to the first formula: <math>R_3 \cdot I = X_C \cdot I</math><br/> <math>R_3 = \frac{X_C \cdot I}{I} = \frac{1}{2\pi \cdot f \cdot C} \cdot \frac{1}{I} = \frac{1}{2\pi \cdot 450 \cdot 30 \cdot 10^{-6} \cdot 0.1}</math></p> |
|---|

**Exercise E1 Complex Impedance Circuit**  
 (written test, approx. 15 % of a 60-minute written test, WS2022)

**1. Calculate the current  $I$  through the resistor  $R$  in the circuit shown in the diagram.**  
 The voltage source is  $u(t) = 3.0 \sim \text{V} \cdot \sin(2\pi \cdot 15 \sim \text{kHz} \cdot t)$   
 The circuit consists of a resistor  $R = 10 \sim \Omega$ , an inductor  $L = 330 \sim \mu\text{H}$ , and a capacitor  $C = 30 \sim \mu\text{F}$  in series.

|  |
|--|
| <p>1. Calculate the current <math>I</math> through the resistor <math>R</math> in the circuit shown in the diagram.<br/>                 The voltage source is <math>u(t) = 3.0 \sim \text{V} \cdot \sin(2\pi \cdot 15 \sim \text{kHz} \cdot t)</math><br/>                 The circuit consists of a resistor <math>R = 10 \sim \Omega</math>, an inductor <math>L = 330 \sim \mu\text{H}</math>, and a capacitor <math>C = 30 \sim \mu\text{F}</math> in series.</p> |
| <p>Result<br/> <math>Z = 19.8 \sim \Omega</math><br/> <math>I = \frac{3.0}{19.8} = 0.1515 \sim \text{A}</math></p>   |
| <p>Draw the circuit diagram of the given circuit with all components, voltages, and currents.</p>  |
| <p><math>Z = \frac{U}{I} = \frac{3.0}{0.1515} = 19.8 \sim \Omega</math><br/> <math>Z_C = \frac{1}{2\pi \cdot 15 \cdot 30 \cdot 10^{-6}} = 1097.3 \sim \Omega</math><br/> <math>Z_L = 2\pi \cdot 15 \cdot 330 \cdot 10^{-6} = 3.16 \sim \Omega</math><br/> <math>Z = R + j(Z_L - Z_C) = 10 + j(3.16 - 1097.3) = 10 - j1094.1 \sim \Omega</math><br/> <math> Z  = \sqrt{10^2 + 1094.1^2} = 1094.2 \sim \Omega</math></p>   |











From:  
<https://mexle.te.hs-heilbronn.de/> - **MEXLE Wiki**

Permanent link:  
[https://mexle.te.hs-heilbronn.de/electrical\\_engineering\\_1/ws2022\\_exam?rev=1680343849](https://mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1680343849)

Last update: **2023/04/01 12:10**

