

Exam Winter Semester 2022

Student Group

| First Name | Surname | Matrikel Nr. |
|------------|---------|--------------|
| | | |
| | | |
| | | |

Table of Contents

- Exercise E4 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 3
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 3
- Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 4
- Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 4
- Exercise E6 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 5
- Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 6
- Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 8
- Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 12
- Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) 16
- Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) 17
- Exercise E2 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 19
- Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 19
- Exercise E3 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 20
- Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 20
- Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 20

| | |
|--|----|
| test, WS2022) | 21 |
| Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) | 24 |

G

Exercise E4 Resistance of a Wire by Resistivity
(written test, approx. 6 % of a 60-minute written test, WS2022)

A heating element made of nichrome wire with a temperature coefficient of $1.80 \cdot 10^{-4} \text{ K}^{-1}$ is electrically connected to a power supply. A power dissipation (= heat flow) of $P=40 \text{ W}$ is necessary.

Determine the current I and the operating voltage U for heating elements.

The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

∴ Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} \\ I &= \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \\ R &= \rho \cdot \frac{l}{\frac{1}{4} d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

Exercise E1 Resistance of a Wire by Resistivity
(written test, approx. 6 % of a 60-minute written test, WS2022)

A heating element made of nichrome wire with a temperature coefficient of $1.80 \cdot 10^{-4} \text{ K}^{-1}$ is electrically connected to a power supply. A power dissipation (= heat flow) of $P=40 \text{ W}$ is necessary.

Determine the current I and the operating voltage U for heating elements.

The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

∴ Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} \\ I &= \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \\ R &= \rho \cdot \frac{l}{\frac{1}{4} d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

Exercise E1 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator, explains a thermodynamic process in a refrigeration system. The refrigerant has a resistance of $10 \text{ k}\Omega$ at 25°C . Its temperature coefficients are: $\alpha=0.01 \text{ K}^{-1}$ and $\beta=71 \cdot 10^{-6} \text{ K}^{-2}$.

Result
The temperature inside the refrigeration system can reach down to -40°C .

Calculate the resistance of the thermistor at -40°C .

$$R = 6.5 \text{ k}\Omega$$

The power transfer is reduced by a factor of 10. Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

```
\begin{align*} R &= R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) && | \\ \text{\textit{with } } \Delta T &= T_{\text{end}} - T_{\text{start}} \\ R &= 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right) \\ \end{align*}
```

Exercise E2 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator, explains a thermodynamic process in a refrigeration system. The refrigerant has a resistance of $10 \text{ k}\Omega$ at 25°C . Its temperature coefficients are: $\alpha=0.01 \text{ K}^{-1}$ and $\beta=71 \cdot 10^{-6} \text{ K}^{-2}$.

Result
The temperature inside the refrigeration system can reach down to -40°C .

Calculate the resistance of the thermistor at -40°C .

$$R = 6.5 \text{ k}\Omega$$

The power transfer is reduced by a factor of 10. Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

```
\begin{align*} R &= R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) && | \\ \text{\textit{with } } \Delta T &= T_{\text{end}} - T_{\text{start}} \\ R &= 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right) \\ \end{align*}
```

Exercise E6 Pure Resistor Network Simplification
(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at once, $R_2 = R_3 = 100 \Omega$ and the switch shall be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

$$R_{eq} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.



Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:

$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel (R_Y + R_2) \parallel (R_Y + R_2) \parallel (R_Y + R_2) \parallel (R_Y + R_2) \parallel (R_Y + R_2) \parallel (R_Y + R_2) \parallel (R_Y + R_2) \parallel (R_Y + R_2)$$

.. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution



The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$


Exercise E3 Pure Resistor Network Simplification
(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved with $R_1 = 200 \Omega$, $R_2 = R_3 = 100 \Omega$ and the switch S is given. R_{eq} is given.

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

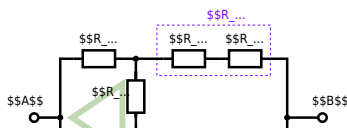


Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:
$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

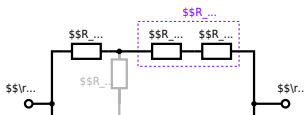


The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \, \Omega + 200 \, \Omega + 200 \, \Omega) \parallel (100 \, \Omega + 100 \, \Omega) \parallel R_{\text{eq}} = (500 \, \Omega) \parallel (200 \, \Omega) \parallel R_{\text{eq}} = \frac{500 \, \Omega \cdot 200 \, \Omega}{500 \, \Omega + 200 \, \Omega} \parallel$$

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \, \text{V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \, \Omega$$

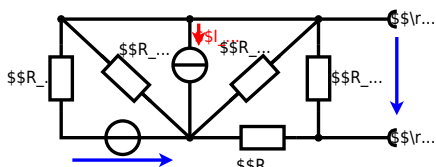


Calculate the internal resistance R_{in} and the source voltage U_{s} of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3=10 \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$. Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

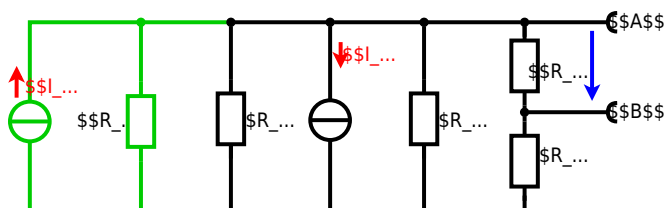

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24} = I_{24} \cdot (R_6 + R_7)$$

$$U_{24} = U_2 \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} - I_4 \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} - (U_2 \cdot \frac{R_7}{R_1} - I_4) \cdot \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$


with $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$:

$$U_{AB} = \frac{6.0\text{V}}{5.0\Omega} - 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \parallel R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result

$$U_s = U_{AB} = 4.5\text{V} \parallel R_i = R_{AB} = 6\Omega$$

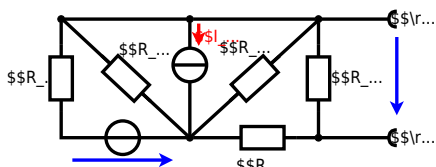


Calculate the internal resistance R_{in} and the source voltage U_{s} of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3=10 \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$. Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

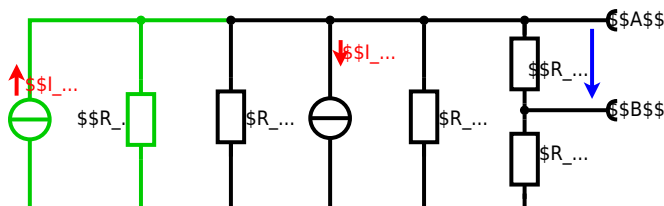

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24} = I_{24} \cdot R_{135} + I_1 \cdot R_2$$

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} = \left(\frac{U_2}{R_1} - I_4 \right) \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5}$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} = \left(\frac{U_2}{R_1} - I_4 \right) \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \Omega \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} || R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

Exercise E5 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit below is a fully discharging RC circuit. The capacitor is initially uncharged. The voltage across the capacitor is again 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

$$U_{eq} = \frac{U \cdot R_2}{R_1 + R_2} = \frac{12 \text{ V} \cdot 2 \Omega}{2 \Omega + 2 \Omega} = 3 \text{ V}$$

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .



The circuit contains a voltage source $U=12\text{ V}$, a switch S_1 , a resistor of $R_1=20\text{ }\Omega$ and a capacitor of $C=100\text{ }\mu\text{F}$. The switch S_2 to an additional consumer R_2 will be considered to be open for the first task. At the moment $t_0=0\text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0)=0\text{ V}$.



First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_c(t_1)=0.5 \cdot U$.

Solution



So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_c(t_1)=0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$.
 An equivalent linear voltage source can be given with U_s , R_1 and R_B as seen in yellow:

$$U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$$
 The internal resistance is given by substituting the ideal voltage source with its resistance ($r=0\text{ }\Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10\text{ }\Omega$$

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($r=0\text{ }\Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10\text{ }\Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1\text{ ms}/(10\text{ }\Omega \cdot 100\text{ }\mu\text{F})})$$

Exercise E4 Charging Capacitors
 (written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (as shown in the figure) consists of a DC voltage source $U=6\text{ V}$, a resistor $R_1=20\text{ }\Omega$, a capacitor $C=20\text{ }\mu\text{F}$ and a light bulb $R_B=20\text{ }\Omega$. The switch S_1 is open. The voltage across the capacitor is again 0 V at the moment $t_0=0\text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2=1\text{ ms}$ after closing the switch.

Solution To solve this, first create an equivalent linear voltage source from U , R_1 , and R_B .

$$U_s = U \cdot \frac{R_B}{R_1 + R_B} = 3\text{ V}$$

$$R_i = R_1 \parallel R_B = 10\text{ }\Omega$$

Solution

The ideal voltage source is $U = 12 \text{ V}$. The internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .



The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ }\Omega$ and a capacitor of $C = 100 \text{ }\mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.



Solution

An equivalent linear voltage source can be given with U , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($R = 0 \text{ }\Omega$, short-circuit).

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2 / (R_1 \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t_2 / (10 \text{ }\Omega \cdot 100 \text{ }\mu\text{F})})$$

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$: $u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$. It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$

Exercise E2 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Given that the phasor voltage source $\underline{U} = 50 \angle 0^\circ$ V and the admittance $\underline{Y} = 0.24 - j0.2$ S, the current \underline{I} through the components ($\$R\$ and $\$X_L\$) shall be given.$$

After analysis, the full width dimensioned complex impedance \underline{Z} shall be extracted and the magnitude $|\underline{Z}|$ in phase (real $\$Z_{re}\$ and $\$Z_{im}\$) and $\$Z_{mag}\$ shall be given.$$$

Solution
.. Calculation of physical values of the two components.
Solution $\varphi_i = \arctan\left(\frac{-0.2}{0.24}\right) = -40.1^\circ$

Solution

$\underline{I} = \frac{\underline{U}}{\underline{Z}} \parallel \&= \{50 \angle 0^\circ\} \parallel \&= \{50 \angle 0^\circ\} \cdot \{0.24 - j0.2\} = 12 - j10$
The current \underline{I} has a magnitude of $|\underline{I}| = \sqrt{12^2 + 10^2} = 15.62$ A and a phase angle of $\varphi_i = \arctan\left(\frac{-10}{12}\right) = -40.1^\circ$.

Therefore, the component $R = 12 / 15.62 = 0.768 \Omega$ and the component $X_L = 10 / 15.62 = 0.64 \Omega$.

With the complex part $\underline{Z} = 0.768 - j0.64 \Omega$, the magnitude $|\underline{Z}| = \sqrt{0.768^2 + 0.64^2} = 1 \Omega$ and the phase angle $\varphi_Z = \arctan\left(\frac{-0.64}{0.768}\right) = -40.1^\circ$.

The phase φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{-0.64}{0.768}\right) = -40.1^\circ$.

With the complex part $\underline{Z} = 0.768 - j0.64 \Omega$, the magnitude $|\underline{Z}| = 1 \Omega$ and the phase angle $\varphi_Z = -40.1^\circ$.

Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Given that the phasor voltage source $\underline{U} = 50 \angle 0^\circ$ V and the admittance $\underline{Y} = 0.24 - j0.2$ S, the current \underline{I} through the components ($\$R\$ and $\$X_L\$) shall be given.$$

After analysis, the full width dimensioned complex impedance \underline{Z} shall be extracted and the magnitude $|\underline{Z}|$ in phase (real $\$Z_{re}\$ and $\$Z_{im}\$) and $\$Z_{mag}\$ shall be given.$$$

Solution
.. Calculation of physical values of the two components.
Solution $\varphi_i = \arctan\left(\frac{-0.2}{0.24}\right) = -40.1^\circ$

Solution

$\underline{I} = \frac{\underline{U}}{\underline{Z}} \parallel \&= \{50 \angle 0^\circ\} \parallel \&= \{50 \angle 0^\circ\} \cdot \{0.24 - j0.2\} = 12 - j10$
The current \underline{I} has a magnitude of $|\underline{I}| = \sqrt{12^2 + 10^2} = 15.62$ A and a phase angle of $\varphi_i = \arctan\left(\frac{-10}{12}\right) = -40.1^\circ$.

Therefore, the component $R = 12 / 15.62 = 0.768 \Omega$ and the component $X_L = 10 / 15.62 = 0.64 \Omega$.

The absolute value of the impedance is $Z = \sqrt{R^2 + (X_L - X_C)^2}$ with $R = 5 \Omega$, $X_L = \omega L = 2\pi \cdot 4 \text{ MHz} \cdot 100 \text{ nH} = 2.51 \text{ m}\Omega$ and $X_C = \frac{1}{\omega C} = \frac{1}{2\pi \cdot 4 \text{ MHz} \cdot 10 \text{ nF}} = 3.98 \text{ m}\Omega$.
 The phase ϕ is given by $\phi = \arctan\left(\frac{X_L - X_C}{R}\right) = \arctan\left(\frac{2.51 \text{ m}\Omega - 3.98 \text{ m}\Omega}{5 \Omega}\right) = -0.24 \text{ rad}$.
 With the complex part comes the physical value: $I = \frac{U}{Z} = \frac{50 \text{ V}}{\sqrt{5^2 + (2.51 - 3.98)^2}} = 10 \text{ A}$.
 The phase ϕ is $\phi = -0.24 \text{ rad} = -13.7^\circ$.

Exercise E3 Impedances at different Frequencies
 (written test, approx. 18 % of a 60-minute written test, WS2022)

At a series circuit with $R_1 = 1 \text{ k}\Omega$, $R_2 = 4.7 \text{ k}\Omega$, $L = 100 \text{ nH}$ and $C = 10 \text{ nF}$ at $f = 4 \text{ MHz}$, the absolute value of the impedance of the resistor R_1 shall have the same absolute value of the impedance as a capacitor $C_1 = 40 \text{ nF}$ at $f_1 = 4 \text{ MHz}$.

Solution
 $R_1 = 1.00 \text{ k}\Omega$
 $R_2 = 4.7 \text{ k}\Omega$
 $L = 100 \text{ nH}$
 $C = 10 \text{ nF}$
 $f = 4 \text{ MHz}$
 $f_1 = 4 \text{ MHz}$
 $C_1 = 40 \text{ nF}$

A series circuit means that the current is constant on every component.
 The equivalent impedance for R_2 and L combined is given by $Z_{RL} = \sqrt{R_2^2 + (X_L)^2}$.
 Parallel circuit means that the voltage is the same on R_1 and Z_{RL} .
 The voltage across R_1 is $U_{R1} = I \cdot R_1$.
 The voltage across Z_{RL} is $U_{ZRL} = I \cdot Z_{RL}$.
 Since $U_{R1} = U_{ZRL}$, we have $I \cdot R_1 = I \cdot Z_{RL}$.
 This can be simplified to $R_1 = Z_{RL}$.
 $R_1 = \sqrt{R_2^2 + (X_L)^2}$ (It has to, since R_1 is perpendicular to X_L in the impedance triangle).
 Therefore, the resulting current of the parallel circuit is given as:
 $I = \frac{U}{R_1} = \frac{U}{\sqrt{R_2^2 + (X_L)^2}}$
 This can be rearranged to $R_1^2 = R_2^2 + (X_L)^2$.
 $R_1^2 - R_2^2 = (X_L)^2$
 $R_1^2 - R_2^2 = (\omega L)^2$
 $R_1^2 - R_2^2 = (2\pi \cdot 4 \text{ MHz} \cdot 100 \text{ nH})^2$
 $R_1^2 - R_2^2 = (2.51 \text{ m}\Omega)^2$
 $R_1^2 - R_2^2 = 6.3 \text{ m}\Omega^2$
 $R_1^2 = R_2^2 + 6.3 \text{ m}\Omega^2$
 $R_1 = \sqrt{R_2^2 + 6.3 \text{ m}\Omega^2}$
 $R_1 = \sqrt{(4.7 \text{ k}\Omega)^2 + 6.3 \text{ m}\Omega^2}$
 $R_1 = 4.7 \text{ k}\Omega$

Exercise E6 Impedances at different Frequencies
 (written test, approx. 18 % of a 60-minute written test, WS2022)

Resistor R_1 shall have the same absolute value of the impedance as a capacitor $C_1 = 40 \text{ nF}$ at $f_1 = 4 \text{ MHz}$.

Solution

$$R_1 = 1.00 \text{ } \Omega$$

$$R_2 = 10.0 \text{ } \Omega$$

A series circuit means that the current is constant on every component.

The equivalent impedance for R and L combined is given by

$$Z_{RL} = R + j\omega L$$

Parallel circuit means that the voltage is the same on R_2 and C_1

$$\frac{1}{Z_{RC}} = \frac{1}{R_2} + \frac{1}{j\omega C_1}$$

Since R_2 and C_1 are perpendicular to each other, the resulting current of the parallel circuit is given as:

$$I_{RC} = \sqrt{I_{R2}^2 + I_{C1}^2}$$

Therefore, the resulting current of the parallel circuit is given as:

$$I_{RC} = \sqrt{I_{R2}^2 + I_{C1}^2}$$

Back to the first formula:

$$R_3 \cdot I_{RC} = X_{C3} \cdot I_{RC}$$

$$R_3 = \frac{X_{C3} \cdot I_{RC}}{I_{RC}}$$

$$R_3 = \frac{1}{2\pi \cdot f \cdot C_3} \cdot \frac{I_{RC}}{I_{RC}}$$

Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

1. Calculate the current $i(t)$ through the series circuit Z of a linear source $u(t) = 3.0 \text{ V} \cdot \sin(2\pi \cdot 15 \text{ kHz} \cdot t)$ and a resistor $R = 10 \text{ } \Omega$ in the voltage circuit.

Solution

Result

$$Z = 48.2 \text{ } \Omega \quad Z_C = 19.8 \text{ } \Omega$$

Draw the circuit diagram of the given circuit

$$Z = \frac{U}{I} \quad I = \frac{U}{Z}$$

$$Z_C = \frac{1}{2\pi \cdot f \cdot C} = \frac{1}{2\pi \cdot 15 \text{ kHz} \cdot 0.22 \text{ } \mu\text{F}}$$

With $f = 15 \text{ kHz}$

$$Z_C = \frac{1}{2\pi \cdot 15 \text{ kHz} \cdot 0.22 \text{ } \mu\text{F}} = 19.8 \text{ } \Omega$$

$$Z = R + j(Z_L - Z_C) = 10 \text{ } \Omega + j(48.2 \text{ } \Omega - 19.8 \text{ } \Omega)$$

$$Z = 10 \text{ } \Omega + j28.4 \text{ } \Omega$$

$$|Z| = \sqrt{10^2 + 28.4^2} = 30.1 \text{ } \Omega$$

$$i(t) = \frac{3.0 \text{ V}}{30.1 \text{ } \Omega} \cdot \sin(2\pi \cdot 15 \text{ kHz} \cdot t - \phi)$$



Exercise E7 Complex Impedance Circuit
(written test, approx. 15 % of a 60-minute written test, WS2022)

1. Calculate the current $i(t)$ through the resistor R in the circuit shown in Fig. 1. The voltage source is $u(t) = 3.0 \sin(2\pi \cdot 15 \cdot t)$ V. The circuit consists of a resistor $R = 10 \Omega$, an inductor $L = 330 \mu\text{H}$, and a capacitor $C = 0.22 \mu\text{F}$, all in series.

Result

$$i(t) = 197.3 \sin(2\pi \cdot 15 \cdot t - 48.2^\circ) \text{ mA}$$

2. Draw the circuit diagram of the given circuit. Label all components, voltages, and currents.

$$Z = \frac{U}{I} \quad I = \frac{U}{Z} \quad Z_C = \frac{1}{j\omega C} = \frac{1}{j2\pi \cdot 15 \cdot 0.22 \cdot 10^{-6}}$$

Result $\omega = 2\pi \cdot 15 \text{ kHz} \cdot 0.22 \cdot 10^{-6} \text{ F}$


$$Z_C = \frac{1}{j\omega C} = \frac{1}{j \cdot 2\pi \cdot 15 \cdot 0.22 \cdot 10^{-6}} = -j \cdot 378.5 \Omega$$

$$Z_L = j\omega L = j \cdot 2\pi \cdot 15 \cdot 330 \cdot 10^{-6} = j \cdot 3.16 \Omega$$

$$\underline{Z} = R + \underline{Z}_L + \underline{Z}_C = 10 + j3.16 - j378.5 = 10 - j375.3 \Omega$$

$$|\underline{Z}| = \sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2} = \sqrt{10^2 + (-375.3)^2} = 375.4 \Omega$$

5510

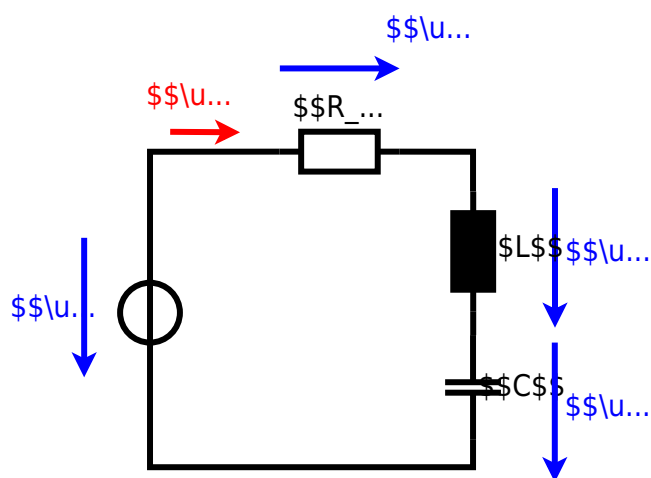

From:
<https://mexle.te.hs-heilbronn.de/> - **MEXLE Wiki**

Permanent link:
https://mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1680385389

Last update: **2023/04/01 23:43**

