

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

- Exam Winter Semester 2022** 2
- Additional permitted Aids 2
- Hits 2
- Only EEE1-relevant Part 2
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 2
- Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 3
- Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 3
- Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 5
- Full Exam 9
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 9
- Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 10
- Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 10
- Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 12
- Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) 16
- Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 17
- Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 17
- Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 18

Exam Winter Semester 2022

Additional permitted Aids

- non-programmable calculator,
- formulary (2 DIN A4 pages)

Hits

- The duration of the exam is 60 min.
- Attempts to cheat will lead to exclusion and failure of the exam.
- Withdrawal is no longer possible after these exam has been handed out.
- Please write down intermediate calculations and results on the assignment sheet. (when more space is needed also on the reverse side. In this case: Mark it clearly).
- Always use units in the calculation.
- Use a document-proof, non-red pen.

Only EEE1-relevant Part

This part is only for about 25 minutes !

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

2. Heating elements are used to heat wires with a temperature of 180°C . An electric power dissipation (= heat flow) of $P=40\text{ W}$ is necessary. Calculate the current I needed to operate for heating elements. The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6}\ \Omega\text{m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .
 Solution: $R = \rho \cdot \frac{l}{A}$
 ∴ Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40\text{ W}}{0.33\ \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \\ R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \text{and } R = 1.10 \cdot 10^{-6}\ \Omega\text{m} \cdot \frac{4 \cdot 3\text{ m}}{(3.57 \cdot 10^{-3}\text{ m})^2 \cdot \pi} \end{aligned}$$

Exercise E2 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator, which has a temperature coefficient of resistance in a refrigeration system. The thermistor has a resistance of $10 \text{ k}\Omega$ at 25°C . Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

Result: The temperature inside the refrigeration system can reach down to -40°C .

Calculate the resistance of the thermistor at -40°C .

$$R = 6.5 \text{ k}\Omega$$

The power transfer is reduced by a factor of 10. Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

```
\begin{align*} R &= R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) && | \\ \text{with } \Delta T &= T_{\text{end}} - T_{\text{start}} && \\ R &= 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right) && \\ &&& \end{align*}
```


Exercise E3 Pure Resistor Network Simplification
(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved: $R_1 = 20 \text{ }\Omega$, $R_2 = 10 \text{ }\Omega$, $R_3 = 15 \text{ }\Omega$ and the voltage $U = 15 \text{ V}$.
 Result: R_B .

Solution

```
\begin{align*} R_{\text{eq}} &= 13.8 \text{ }\Omega && \end{align*}
```

Now a wye-delta transformation is necessary.

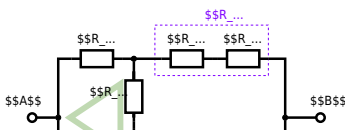


Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:
$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

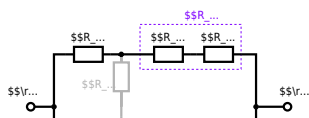


The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

**Exercise E3 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result


$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

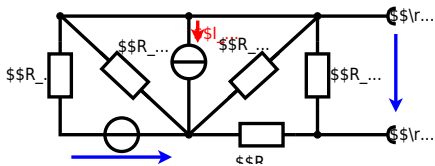


Calculate the internal resistance R_{int} and the source voltage U_{s} of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3=10 \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$. Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

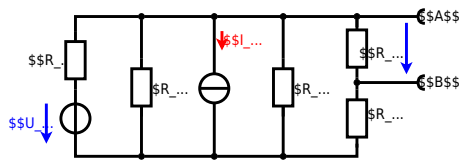

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

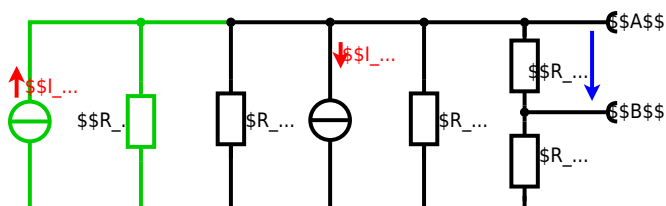

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24}$$

$$U_{24} = U_{24} \cdot \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \right) \cdot \left(\frac{U_2}{R_1} - I_4 \right) \cdot \left(\frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \right)$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$:

$$U_{AB} = \left(\frac{6.0\text{V}}{5.0\Omega} - 4.2\text{A} \right) \cdot \left(\frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \right)$$

$$R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

Full Exam

These is the full exam

Full exam

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element made of nichrome wire with a cross-section of 1.80mm^2 . Each cm^3 of the nichrome wire has a power dissipation (= heat flow) of $P=40\text{W}$ is necessary. Calculate the current I needed to operate for heating elements. The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6}\Omega\text{m}$. The heating element is 3m long and has a diameter of 3.57mm . Calculate the resistance R of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40\text{W}}{0.33\Omega}}$$

$$R = \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \quad | \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6}\Omega\text{m} \cdot \frac{4 \cdot 3\text{m}}{d^2 \cdot \pi}$$

$$3 \cdot 10^{-3} \cdot (3.57 \cdot 10^{-3} \cdot R)^2 \cdot \pi$$

[electrical_engineering_and_electronics:task_rj0r6j4apumukrj6_with_calculation](#)
[resistivity, power, exam ee1 ws2022](#)

Exercise E2 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

A. The resistance of a resistor varies with temperature. The resistance of a resistor at 25 °C is 65 Ω. Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$. Calculate the resistance of the thermistor at -40 °C.

Result
 The temperature inside the refrigeration system can reach down to -40 °C.

Calculate the resistance of the thermistor at -40 °C.

The power transferred to the resistor is $P = I^2 R$. The heat flow \dot{Q} is $\dot{Q} = P$. Therefore, with constant I and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$R = 65 \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$


[electrical_engineering_and_electronics:task_70jg4yzznocarsq_with_calculation](#)
[temperature dependent resistance, power, heat, exam ee1 ws2022](#)

Exercise E3 Pure Resistor Network Simplification
(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall hold: $R_1 = 10 \Omega$, $R_2 = 10 \Omega$, $R_3 = 10 \Omega$, $R_4 = 10 \Omega$, $R_5 = 10 \Omega$, $R_6 = 10 \Omega$, $R_7 = 10 \Omega$, $R_8 = 10 \Omega$, $R_9 = 10 \Omega$, $R_{10} = 10 \Omega$. Calculate the equivalent resistance R_{eq} and the current I through R_5 .

Solution
 $R_{eq} = 13.8 \Omega$

Now a wye-delta transformation is necessary.

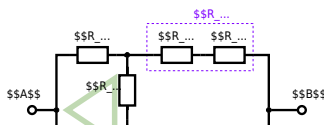


Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:
$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel (R_Y + R_2 + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution



The equivalent resistor is given by a parallel configuration of resistors in series:


$$R_{\text{eq}} = (R_2 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega}$$

[electrical_engineering_and_electronics:task_x357drkaqv84jnsc_with_calculation_network_simplification,_exam_ee1_ws2022](#)

**Exercise E3 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result

$$U_{\text{S}} = U_{\text{AB}} = 4.5 \text{ V} \parallel R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

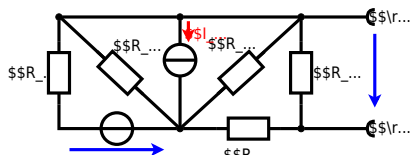


Calculated the internal resistance R_{int} and the source voltage U_{src} of an equivalent linear voltage source on the connectors A and B.

$R_1=5.0 \text{ } \Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \text{ } \Omega$, $I_4=4.2 \text{ A}$,
 $R_5=10 \text{ } \Omega$, $R_6=7.5 \text{ } \Omega$, $R_7=15 \text{ } \Omega$


Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

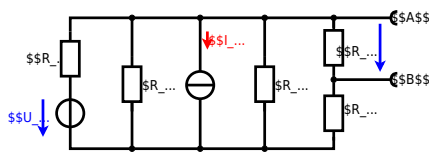


The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

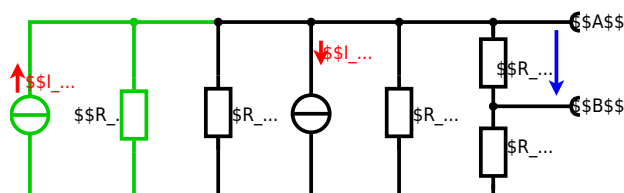

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in

parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \left\{ \frac{U_2}{R_1} \right\} - I_4$$
 The resulting circuit can again be transformed:

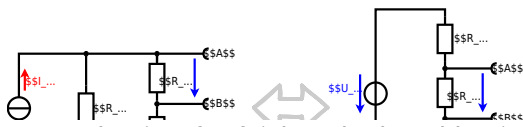

Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24} = R_{135} \cdot I_{24} = \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:
$$U_{\text{AB}} = U_{24} \cdot \left\{ \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right\} = \left(\frac{U_2}{R_1} - I_4 \right) \cdot \left\{ \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right\}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):
$$R_{\text{AB}} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5\Omega || 10\Omega || 10\Omega = 5\Omega || 5\Omega = 2.5\Omega$:

$$U_{\text{AB}} = \left\{ \frac{6.0\text{V}}{5.0\Omega} - 4.2\Omega \right\} \cdot \left\{ \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \right\}$$

$$R_{\text{AB}} = 15\Omega || (7.5\Omega + 2.5\Omega)$$


[electrical_engineering_and_electronics:task_6tqtqtue1e2nf2c7_with_calculation](#)
 dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1
 ws2022

Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)

The capacitor becomes fully charged (voltage across the capacitor is U) again. The voltage across the capacitor is again 0 V at the moment $t_0=0$ s when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2=1$ ms after closing the switch.

Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_B .

The internal voltage source is $U_{int} = U \cdot \frac{R_B}{R_1 + R_B}$ and the internal resistance is $R_{int} = R_1 \parallel R_B = \frac{R_1 \cdot R_B}{R_1 + R_B}$.
 On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

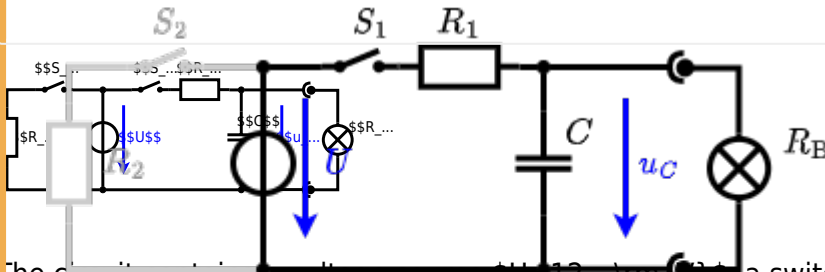


The circuit contains a voltage source $U=12$ V, a switch S_1 , a resistor of $R_1=20$ Ω and a capacitor of $C=100$ μ F.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0=0$ s the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0)=0$ V.

First do not consider the light bulb - it is not connected to the RC circuit.

Calculate the point of time t_1 when $u_c(t_1)=0.5 \cdot U$.

Solution

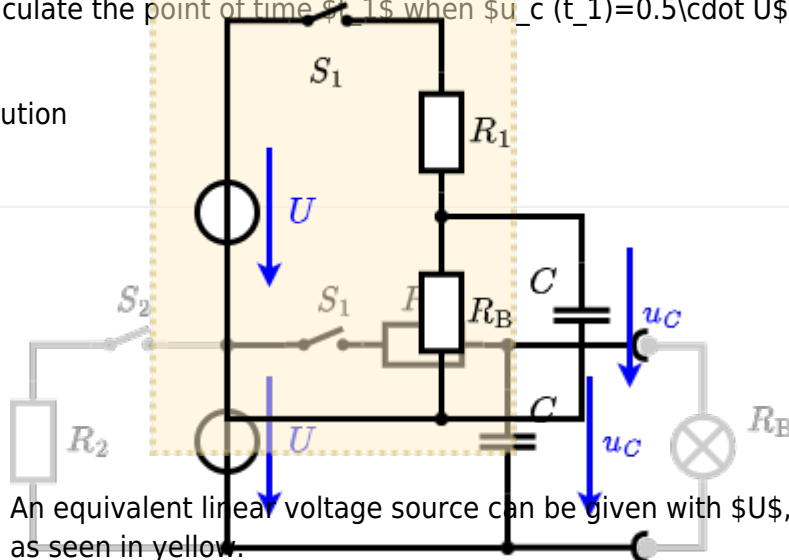

An equivalent linear voltage source can be given with U , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent circuit is $U_{eq} = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$. The internal resistance is given by $R_{int} = R_1 \parallel R_B = \frac{R_1 \cdot R_B}{R_1 + R_B}$.

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t) = U_{eq} \cdot (1 - e^{-t/\tau})$ with $\tau = R_{int} \cdot C$. It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5 \cdot U$
 $1 - e^{-t/\tau} = 0.5 \cdot U$
 $e^{-t/\tau} = 0.5$
 $-\frac{t}{\tau} = \ln(0.5)$
 $t = -\tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(2) \cdot U_{eq}$

$$\frac{1}{2} \cdot U \cdot (1 - e^{-\frac{1}{\tau}}) \cdot I_{\text{max}} \cdot \cos(\mu F)$$

electrical_engineering_and_electronics:task_tb6pi8dgh0m2e2pw_with_calculation charging capacitors, dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022

Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the effective value of the current $i(t)$ and the effective value of the voltage $u(t)$. The results (I_{eff} and U_{eff}) shall be given.

After analysis, the following complex impedances can be extracted and brought into phase: $Z_1 = (2 - j) \Omega$, $Z_2 = (4 + j) \Omega$, $Z_3 = (5 + j) \Omega$

.. Calculate the physical values of the two components.
 Solution:
$$R = 2 \Omega, X_L = 1 \Omega, X_C = 2 \Omega, X_L = 1 \Omega, X_C = 2 \Omega$$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \text{and} \quad \underline{U} = \underline{I} \cdot \underline{Z}$$
 The current and voltage are in phase and their effective value are $I_{\text{eff}} = 0.24 \text{ A}$ and $U_{\text{eff}} = 50 \text{ V}$ resulting in a power of $P = 12 \text{ W}$.
 Therefore, the effective value of the current is $I_{\text{eff}} = 0.24 \text{ A}$ and the effective value of the voltage is $U_{\text{eff}} = 50 \text{ V}$.
 The phase φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(Z)}{\text{Re}(Z)}\right) = \arctan\left(\frac{1}{2}\right) = 26.56^\circ$
 With the complex part comes the physical value $I_{\text{eff}} = 0.24 \text{ A}$ and $U_{\text{eff}} = 50 \text{ V}$.
 The phase φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(Z)}{\text{Re}(Z)}\right) = \arctan\left(\frac{1}{2}\right) = 26.56^\circ$

electrical_engineering_and_electronics:task_jti0uzudcmg4u22t_with_calculation complex impedance, exam ee1 ws2022

Exercise E6 Impedances at different Frequencies

(written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit consists of a resistor with $R = 100 \Omega$ and a capacitor with $C = 40 \text{ nF}$ in series. The voltage across the resistor is $U_R = 100 \text{ V}$ and the voltage across the capacitor is $U_C = 40 \text{ V}$. The total voltage across the series combination is $U = 140 \text{ V}$. The current through the circuit is $I = 1 \text{ A}$. The total impedance of the circuit is $Z = 140 \Omega$. The total power is $P = 140 \text{ W}$. The total reactive power is $Q = 40 \text{ var}$. The total complex power is $S = 140 + j40 \text{ VA}$.

Solution

$$R_1 = 100 \Omega$$

$$R_2 = 10.0 \Omega$$

A series circuit means that the current is constant on every component. The equivalent impedance for R and L combined is given by

Parallel circuit means that the voltage is the same on R_1 and C_2

Power is perpendicular to U_{R_1} and U_{C_2} (It has to, since R_1 is perpendicular to I and C_2 is perpendicular to I)

Therefore, the resulting current of the parallel circuit is given as:

This circuit is a parallel circuit. The total impedance is $Z = \sqrt{R^2 + X_C^2}$

Back to the first formula:

[electrical_engineering_and_electronics:task_pdkgtyexxy1ktu3_with_calculation](#)
[complex impedance, exam ee1 ws2022](#)

Exercise E7 Complex Impedance Circuit

(written test, approx. 15 % of a 60-minute written test, WS2022)

1. Consider the circuit with the voltage source $u(t) = 3.0 \text{ V} \cdot \sin(2\pi \cdot 15 \text{ kHz} \cdot t)$ and the resistor $R = 10 \Omega$ in series with the inductor $L = 10 \mu\text{H}$ and the capacitor $C = 0.22 \mu\text{F}$. The total impedance of the circuit is $Z = 19.8 \Omega$. The total current is $I = 1.515 \text{ A}$. The total voltage across the resistor is $U_R = 15.15 \text{ V}$. The total voltage across the inductor is $U_L = 2.26 \text{ V}$. The total voltage across the capacitor is $U_C = 3.58 \text{ V}$.

Solution

Result

Draw the circuit diagram of the given circuit

Label the components, voltages, and currents.


$$Z = \sqrt{R^2 + (X_L - X_C)^2}$$

$$Z = \sqrt{10^2 + (2\pi \cdot 15 \cdot 10^{-6} - 2\pi \cdot 15 \cdot 0.22 \cdot 10^{-6})^2}$$

$$Z = 19.8 \Omega$$

Result

With $I = 1.515 \text{ A}$ and $Z = 19.8 \Omega$

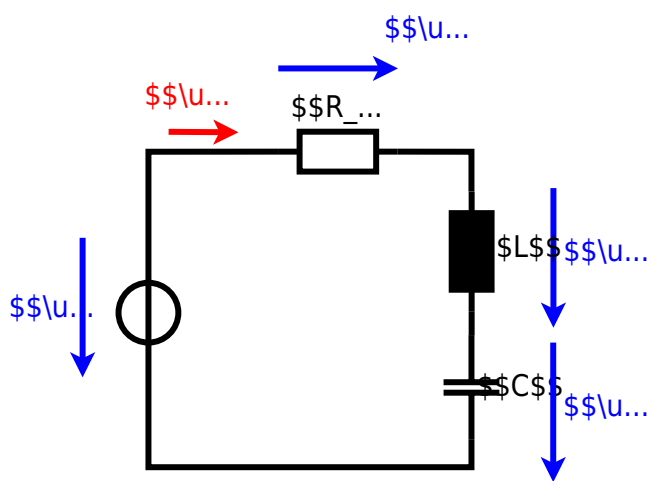

electrical_engineering_and_electronics:task_kricv9fh7haauo6q_with_calculation
complex impedance, exam ee1 ws2022

From:

<https://mexle.te.hs-heilbronn.de/> - **MEXLE Wiki**

Permanent link:

https://mexle.te.hs-heilbronn.de/electrical_engineering_and_electronics_1/ws2022_exam

Last update: **2026/01/12 00:24**

