

# Exam Winter Semester 2022

## Student Group

First Name	Surname	Matrikel Nr.

## Table of Contents

<b>Exam Winter Semester 2022</b> .....	2
Additional permitted Aids .....	2
Hits .....	2
Only EEE1-relevant Part .....	2
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) .....	2
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) .....	3
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) .....	3
Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) .....	5
Full Exam .....	9
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) .....	9
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) .....	10
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) .....	10
Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) .....	12
Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) .....	16
Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) .....	17
Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) .....	17
Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) .....	18

# Exam Winter Semester 2022

## Additional permitted Aids

- non-programmable calculator,
- formulary (2 DIN A4 pages)

## Hits

- The duration of the exam is 60 min.
- Attempts to cheat will lead to exclusion and failure of the exam.
- Withdrawal is no longer possible after these exam has been handed out.
- Please write down intermediate calculations and results on the assignment sheet. (when more space is needed also on the reverse side. In this case: Mark it clearly).
- Always use units in the calculation.
- Use a document-proof, non-red pen.

## Only EEE1-relevant Part

**This part is only for about 25 minutes !**

### Exercise E1 Resistance of a Wire by Resistivity

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. Heating elements are used to heat wires with a temperature of  $180^\circ\text{C}$ . An electric power dissipation (= heat flow) of  $P=40\text{ W}$  is necessary.

Determine the current  $I$  needed to operate it.

The Nichrome wire has a resistivity of  $1.10 \cdot 10^{-6}\ \Omega\text{m}$ .

The heating element is  $3\text{ m}$  long and has a diameter of  $3.57\text{ mm}$ .

∴ Calculate the resistance  $R$  of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \\ &= \sqrt{\frac{P}{R}} = \sqrt{\frac{40\text{ W}}{0.33\ \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \text{with } A = r^2 \cdot \pi = \\ &= \frac{1}{4} d^2 \cdot \pi \quad \text{and } R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \text{and } R = \\ &= 1.10 \cdot 10^{-6}\ \Omega\text{m} \cdot \frac{4 \cdot 3\text{ m}}{(3.57 \cdot 10^{-3}\text{ m})^2 \cdot \pi} \end{aligned}$$

**Exercise E2 Temperature-dependent Resistance**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

2. A refrigerator, which has a temperature coefficient of resistance of  $\alpha = 0.01 \text{ K}^{-1}$  and  $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$ , has a resistance of  $10 \text{ k}\Omega$  at  $25^\circ\text{C}$ . Calculate the resistance of the thermistor at  $-40^\circ\text{C}$ .

Its temperature coefficients are:  $\alpha = 0.01 \text{ K}^{-1}$  and  $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$

The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

Calculate the resistance of the thermistor at  $-40^\circ\text{C}$ .

The resistance transfer characteristic of the circuit and of the heat flow. Therefore, a solution is to use a heat flow up the refrigeration system.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.


```
\begin{align*} R &= R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) && | \\ \text{with } \Delta T &= T_{\text{end}} - T_{\text{start}} && \\ R &= 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right) && \\ &&& \end{align*}
```

**Exercise E3 Pure Resistor Network Simplification**  
**(written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall be solved at  $0^\circ\text{C}$ .  $R_1 = 10 \text{ }\Omega$ ,  $R_2 = 15 \text{ }\Omega$ ,  $R_3 = 15 \text{ }\Omega$ ,  $R_4 = 15 \text{ }\Omega$ ,  $R_5 = 15 \text{ }\Omega$ ,  $R_6 = 15 \text{ }\Omega$ ,  $R_7 = 15 \text{ }\Omega$ ,  $R_8 = 15 \text{ }\Omega$ ,  $R_9 = 15 \text{ }\Omega$ ,  $R_{10} = 15 \text{ }\Omega$ ,  $R_{11} = 15 \text{ }\Omega$ ,  $R_{12} = 15 \text{ }\Omega$ ,  $R_{13} = 15 \text{ }\Omega$ ,  $R_{14} = 15 \text{ }\Omega$ ,  $R_{15} = 15 \text{ }\Omega$ ,  $R_{16} = 15 \text{ }\Omega$ ,  $R_{17} = 15 \text{ }\Omega$ ,  $R_{18} = 15 \text{ }\Omega$ ,  $R_{19} = 15 \text{ }\Omega$ ,  $R_{20} = 15 \text{ }\Omega$ ,  $R_{21} = 15 \text{ }\Omega$ ,  $R_{22} = 15 \text{ }\Omega$ ,  $R_{23} = 15 \text{ }\Omega$ ,  $R_{24} = 15 \text{ }\Omega$ ,  $R_{25} = 15 \text{ }\Omega$ ,  $R_{26} = 15 \text{ }\Omega$ ,  $R_{27} = 15 \text{ }\Omega$ ,  $R_{28} = 15 \text{ }\Omega$ ,  $R_{29} = 15 \text{ }\Omega$ ,  $R_{30} = 15 \text{ }\Omega$ ,  $R_{31} = 15 \text{ }\Omega$ ,  $R_{32} = 15 \text{ }\Omega$ ,  $R_{33} = 15 \text{ }\Omega$ ,  $R_{34} = 15 \text{ }\Omega$ ,  $R_{35} = 15 \text{ }\Omega$ ,  $R_{36} = 15 \text{ }\Omega$ ,  $R_{37} = 15 \text{ }\Omega$ ,  $R_{38} = 15 \text{ }\Omega$ ,  $R_{39} = 15 \text{ }\Omega$ ,  $R_{40} = 15 \text{ }\Omega$ ,  $R_{41} = 15 \text{ }\Omega$ ,  $R_{42} = 15 \text{ }\Omega$ ,  $R_{43} = 15 \text{ }\Omega$ ,  $R_{44} = 15 \text{ }\Omega$ ,  $R_{45} = 15 \text{ }\Omega$ ,  $R_{46} = 15 \text{ }\Omega$ ,  $R_{47} = 15 \text{ }\Omega$ ,  $R_{48} = 15 \text{ }\Omega$ ,  $R_{49} = 15 \text{ }\Omega$ ,  $R_{50} = 15 \text{ }\Omega$ ,  $R_{51} = 15 \text{ }\Omega$ ,  $R_{52} = 15 \text{ }\Omega$ ,  $R_{53} = 15 \text{ }\Omega$ ,  $R_{54} = 15 \text{ }\Omega$ ,  $R_{55} = 15 \text{ }\Omega$ ,  $R_{56} = 15 \text{ }\Omega$ ,  $R_{57} = 15 \text{ }\Omega$ ,  $R_{58} = 15 \text{ }\Omega$ ,  $R_{59} = 15 \text{ }\Omega$ ,  $R_{60} = 15 \text{ }\Omega$ ,  $R_{61} = 15 \text{ }\Omega$ ,  $R_{62} = 15 \text{ }\Omega$ ,  $R_{63} = 15 \text{ }\Omega$ ,  $R_{64} = 15 \text{ }\Omega$ ,  $R_{65} = 15 \text{ }\Omega$ ,  $R_{66} = 15 \text{ }\Omega$ ,  $R_{67} = 15 \text{ }\Omega$ ,  $R_{68} = 15 \text{ }\Omega$ ,  $R_{69} = 15 \text{ }\Omega$ ,  $R_{70} = 15 \text{ }\Omega$ ,  $R_{71} = 15 \text{ }\Omega$ ,  $R_{72} = 15 \text{ }\Omega$ ,  $R_{73} = 15 \text{ }\Omega$ ,  $R_{74} = 15 \text{ }\Omega$ ,  $R_{75} = 15 \text{ }\Omega$ ,  $R_{76} = 15 \text{ }\Omega$ ,  $R_{77} = 15 \text{ }\Omega$ ,  $R_{78} = 15 \text{ }\Omega$ ,  $R_{79} = 15 \text{ }\Omega$ ,  $R_{80} = 15 \text{ }\Omega$ ,  $R_{81} = 15 \text{ }\Omega$ ,  $R_{82} = 15 \text{ }\Omega$ ,  $R_{83} = 15 \text{ }\Omega$ ,  $R_{84} = 15 \text{ }\Omega$ ,  $R_{85} = 15 \text{ }\Omega$ ,  $R_{86} = 15 \text{ }\Omega$ ,  $R_{87} = 15 \text{ }\Omega$ ,  $R_{88} = 15 \text{ }\Omega$ ,  $R_{89} = 15 \text{ }\Omega$ ,  $R_{90} = 15 \text{ }\Omega$ ,  $R_{91} = 15 \text{ }\Omega$ ,  $R_{92} = 15 \text{ }\Omega$ ,  $R_{93} = 15 \text{ }\Omega$ ,  $R_{94} = 15 \text{ }\Omega$ ,  $R_{95} = 15 \text{ }\Omega$ ,  $R_{96} = 15 \text{ }\Omega$ ,  $R_{97} = 15 \text{ }\Omega$ ,  $R_{98} = 15 \text{ }\Omega$ ,  $R_{99} = 15 \text{ }\Omega$ ,  $R_{100} = 15 \text{ }\Omega$ .

```
\begin{align*} R_{\text{eq}} &= 132.8 \text{ }\Omega && \end{align*}
```

Now a wye-delta transformation is necessary.

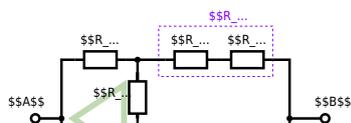


Since  $R_2=R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as: 
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series: 
$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{eq}$  between A and B.

Solution

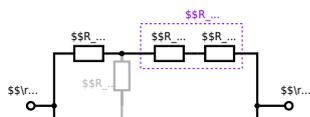


The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

**Exercise E3 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result


$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

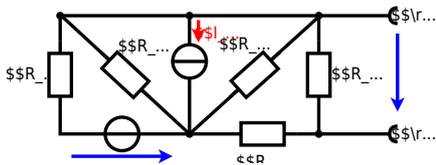


Calculate the internal resistance  $R_i$  and the source voltage  $U_s$  of an equivalent linear voltage source on the connectors A and B.  $R_1=5.0 \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3=10 \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \Omega$ ,  $R_6=7.5 \Omega$ ,  $R_7=15 \Omega$ . Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

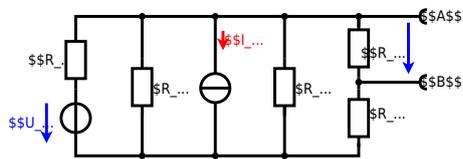

The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

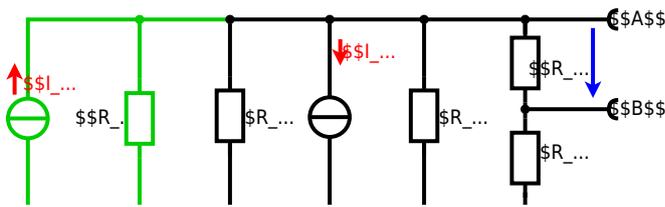

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following:

$$U_{24} = I_{24} \cdot R_6$$

$$I = R_{135} \cdot I_{24} \quad I = \left( \frac{U_2}{R_1} - I_4 \right) \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \left\{ \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \right\} = \left( \frac{U_2}{R_1} - I_4 \right) \cdot \left\{ \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \right\}$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0\Omega$ , so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with  $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$ :

$$U_{AB} = \left( \frac{6.0\text{V}}{5.0\Omega} - 4.2\Omega \right) \cdot \left\{ \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \right\} \quad R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

### Full Exam

These is the full exam

Full exam

### Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element made of nichrome wire with a cross-section of  $1.80\text{mm}^2$ . Each second, a power dissipation (= heat flow) of  $P=40\text{W}$  is necessary. Determine the current  $I$  needed to operate for heating elements. The Nichrome wire has a resistivity of  $1.10 \cdot 10^{-6}\Omega\text{m}$ . The heating element is  $3\text{m}$  long and has a diameter of  $3.57\text{mm}$ . Calculate the resistance  $R$  of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40\text{W}}{0.33\Omega}}$$

$$R = \rho \cdot \frac{l}{A} \quad | \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad R = 1.10 \cdot 10^{-6}\Omega\text{m} \cdot \frac{4 \cdot 3\text{m}}{d^2 \cdot \pi}$$

$$3 \cdot 10^{-3} \cdot (3.57 \cdot 10^{-3} \cdot R)^2 \cdot \pi$$

[electrical\\_engineering\\_and\\_electronics:task\\_rj0r6j4apumukrj6\\_with\\_calculation](#)  
[resistivity, power, exam ee1 ws2022](#)

**Exercise E2 Temperature-dependent Resistance**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

A. The resistance of a resistor varies with temperature. The temperature coefficient of resistance is defined as  $\alpha = \frac{1}{R} \cdot \frac{dR}{dT}$ . The resistance of a resistor is  $R_0 = 100 \Omega$  at  $T_0 = 25^\circ\text{C}$ . Its temperature coefficients are:  $\alpha = 0.01 \text{ K}^{-1}$  and  $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$ .

Result  
 The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

Result  
 Calculate the resistance of the thermistor at  $-40^\circ\text{C}$ .

$$R = 65 \text{ k}\Omega$$

The power transferred to the resistor is  $P = I^2 R$ . The heat generated  $Q = P \cdot t$  is the heat that might heat up the refrigeration system.

Therefore, with constant  $I$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$R = 100 \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$

[electrical\\_engineering\\_and\\_electronics:task\\_70jg4yzznocarsq\\_with\\_calculation](#)  
[temperature dependent resistance, power, heat, exam ee1 ws2022](#)


**Exercise E3 Pure Resistor Network Simplification**  
**(written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall hold:  $R_1 = 100 \Omega$ ,  $R_2 = 100 \Omega$ ,  $R_3 = 100 \Omega$ ,  $R_4 = 100 \Omega$ ,  $R_5 = 100 \Omega$ ,  $R_6 = 100 \Omega$ ,  $R_7 = 100 \Omega$ ,  $R_8 = 100 \Omega$ ,  $R_9 = 100 \Omega$ ,  $R_{10} = 100 \Omega$ ,  $R_{11} = 100 \Omega$ ,  $R_{12} = 100 \Omega$ ,  $R_{13} = 100 \Omega$ ,  $R_{14} = 100 \Omega$ ,  $R_{15} = 100 \Omega$ ,  $R_{16} = 100 \Omega$ ,  $R_{17} = 100 \Omega$ ,  $R_{18} = 100 \Omega$ ,  $R_{19} = 100 \Omega$ ,  $R_{20} = 100 \Omega$ .

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

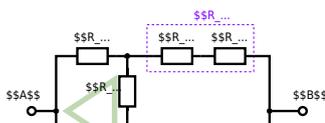

Since  $R_2 = R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel (R_Y + R_2 + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between  $A$  and  $B$ .

Solution



The equivalent resistor is given by a parallel configuration of resistors in series:


$$R_{\text{eq}} = (R_2 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega}$$

[electrical\\_engineering\\_and\\_electronics:task\\_x357drkaqv84jnsc\\_with\\_calculation\\_network\\_simplification,\\_exam\\_ee1\\_ws2022](#)

**Exercise E3 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result

$$U_{\text{S}} = U_{\text{AB}} = 4.5 \text{ V} \parallel R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

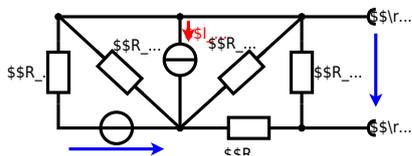


Calculated the internal resistance  $R_{\text{int}}$  and the source voltage  $U_{\text{S}}$  of an equivalent linear voltage source on the connectors A and B.

$R_1=5.0 \text{ } \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3= 10 \text{ } \Omega$ ,  $I_4=4.2 \text{ A}$ ,  
 $R_5=10 \text{ } \Omega$ ,  $R_6=7.5 \text{ } \Omega$ ,  $R_7=15 \text{ } \Omega$


Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

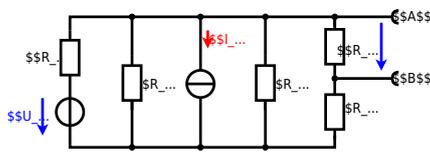

The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

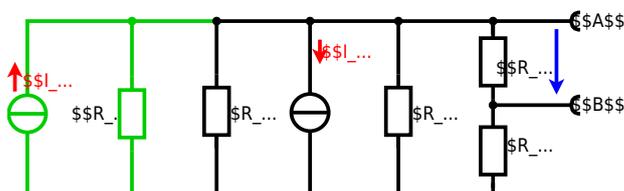

Now a lot of them can be combined. The resistors  $R_1, R_3, R_5$  are in

parallel, like also  $I_2$  and  $I_4$ : 
$$R_{135} = R_1 || R_3 || R_5$$
 
$$I_{24} = I_2 - I_4 = \left\{ \frac{U_2}{R_1} \right\} - I_4$$
 The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following: 
$$U_{24} = R_{135} \cdot I_{24} = \left( \frac{U_2}{R_1} - I_4 \right) \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as: 
$$U_{\text{AB}} = U_{24} \cdot \left\{ \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right\} = \left( \frac{U_2}{R_1} - I_4 \right) \cdot \left\{ \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right\}$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit): 
$$R_{\text{AB}} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{\text{AB}} = \left\{ \frac{6.0 \text{ V}}{5.0 \Omega} \right\} - 4.2 \Omega \cdot \left\{ \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right\}$$
 
$$R_{\text{AB}} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$


[electrical\\_engineering\\_and\\_electronics:task\\_6tqtqtue1e2nf2c7\\_with\\_calculation](#)  
 dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022

### Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)

The capacitor becomes fully charged (voltage across the capacitor is  $U$ ) again. The voltage across the capacitor is again  $0$  V at the moment  $t_0=0$  s when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2=1$  ms after closing the switch.

Hint: To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_B$ .


The internal voltage of the equivalent source is  $U \cdot \frac{R_B}{R_1 + R_B}$  and the internal resistance is  $R_1 \parallel R_B$ . The voltage across the capacitor is  $u_c(t) = U \cdot \frac{R_B}{R_1 + R_B} \cdot (1 - e^{-t/(R_1 \parallel R_B) \cdot C})$ . On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .

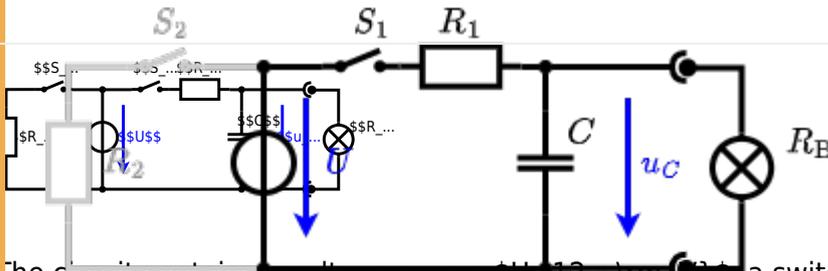

The circuit contains a voltage source  $U=12$  V, a switch  $S_1$ , a resistor of  $R_1=20$  Ohm and a capacitor of  $C=100$  uF. The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first tasks. At the moment  $t_0=0$  s the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0)=0$  V.

... First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time  $t_1$  when  $u_c(t_1)=0.5 \cdot U$ .

Solution

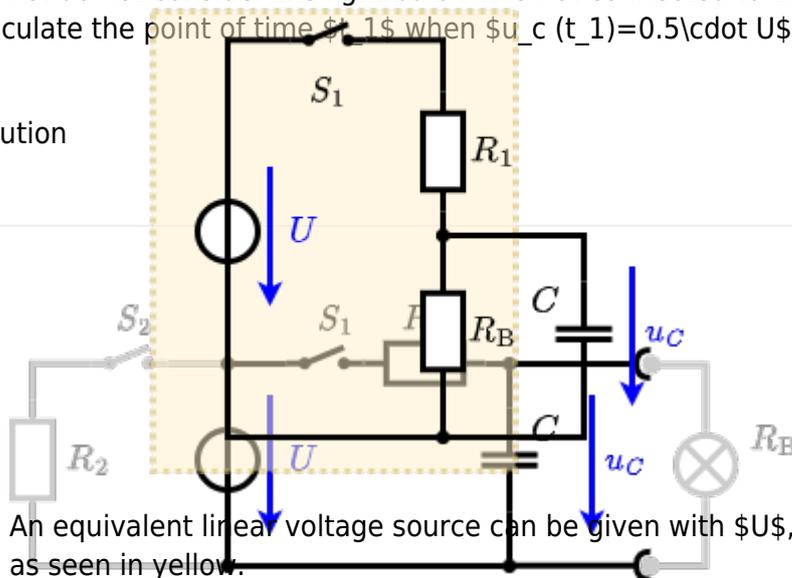

An equivalent linear voltage source can be given with  $U$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore the voltage of the equivalent source is  $U_{eq} = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$ . The internal resistance is given by  $R_{int} = R_1 \parallel R_B = 10$  Ohm. The following formula describes the time course of  $u_c(t)$  which has to be  $u_c(t) = U_{eq} \cdot (1 - e^{-t/(R_{int} \cdot C)})$ . It has to be rearranged to  $(1 - e^{-t/(10 \cdot 10^{-4})}) = 0.5$ .  $e^{-t/(10 \cdot 10^{-4})} = 0.5$   $\ln(0.5) = -t/(10 \cdot 10^{-4})$   $t = 10 \cdot 10^{-4} \cdot \ln(0.5) = -0.693 \cdot 10^{-3} \text{ s} = -0.693 \text{ ms}$ .

$$\frac{1}{2} \cdot U \cdot (1 - e^{-\frac{1}{\tau}}) \cdot I_{\text{max}} \cdot \mu F$$

electrical\_engineering\_and\_electronics:task\_tb6pi8dgh0m2e2pw\_with\_calculation charging capacitors, dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022

**Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)**

2. Calculate the effective value of the current  $i(t)$  and the effective value of the voltage  $u(t)$ . The results ( $I_{\text{eff}}$  and  $U_{\text{eff}}$ ) shall be given.

After analysis, the following complex impedances can be extracted and brought into phase:  $Z_1 = (2 - j) \Omega$ ,  $Z_2 = (4 + j) \Omega$ ,  $Z_3 = (5 + j) \Omega$

.. Calculate the physical values of the two components.  
 Solution: 
$$I_{\text{eff}} = \frac{1}{\sqrt{2}} \cdot \sqrt{I_{\text{eff}}^2} = \frac{1}{\sqrt{2}} \cdot \sqrt{5^2 + 4^2} = \frac{1}{\sqrt{2}} \cdot \sqrt{41} \approx 7.106 \text{ A}$$

Solution  

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \&= \quad \frac{50 \text{ V}}{(2 - j) \Omega + (4 + j) \Omega + (5 + j) \Omega} = \frac{50 \text{ V}}{(11 + j) \Omega}$$
 The current and voltage are in phase and their effective value are  $I_{\text{eff}} = 50 \text{ V} / \sqrt{11^2 + 1^2} = 4.68 \text{ A}$  and  $U_{\text{eff}} = 50 \text{ V}$ .  
 Therefore, the component values are  $R = 4.68 \text{ A} \cdot 10 \text{ mH} = 46.8 \text{ mH}$  and  $C = 50 \text{ V} / (4.68 \text{ A} \cdot 100 \text{ nF}) = 10.66 \text{ nF}$ .  
 With the complex part comes the physical value 
$$I_{\text{eff}} = \frac{1}{\sqrt{2}} \cdot \sqrt{I_{\text{eff}}^2} = \frac{1}{\sqrt{2}} \cdot \sqrt{5^2 + 4^2} = 7.106 \text{ A}$$


electrical\_engineering\_and\_electronics:task\_jti0uzudcmg4u22t\_with\_calculation complex impedance, exam ee1 ws2022

**Exercise E6 Impedances at different Frequencies**







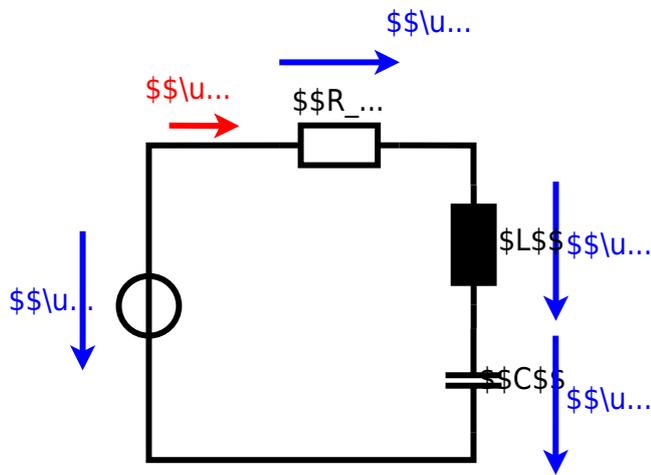

electrical\_engineering\_and\_electronics:task\_kricv9fh7haauo6q\_with\_calculation  
complex impedance, exam ee1 ws2022

From:

<https://mexle.te.hs-heilbronn.de/> - **MEXLE Wiki**

Permanent link:

[https://mexle.te.hs-heilbronn.de/electrical\\_engineering\\_and\\_electronics\\_1/ws2022\\_exam](https://mexle.te.hs-heilbronn.de/electrical_engineering_and_electronics_1/ws2022_exam)

Last update: **2026/01/12 00:24**

