

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

- Exam Winter Semester 2022** 2
- Additional permitted Aids 2
- Hits 2
- Tasks 2
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute
 written test, WS2022) 2
- Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute
 written test, WS2022) 2
- Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute
 written test, WS2022) 3
- Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test,
 WS2022) 5
- Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,
 WS2022) 9
- Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute
 written test, WS2022) 10
- Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute
 written test, WS2022) 11
- Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written
 test, WS2022) 12

Exam Winter Semester 2022

Additional permitted Aids

- non-programmable calculator,
- formulary (2 DIN A4 pages)

Hits

- The duration of the exam is 60 min.
- Attempts to cheat will lead to exclusion and failure of the exam.
- Withdrawal is no longer possible after these exam has been handed out.
- Please write down intermediate calculations and results on the assignment sheet. (when more space is needed also on the reverse side. In this case: Mark it clearly).
- Always use units in the calculation.
- Use a document-proof, non-red pen.

Tasks

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

2. Heating elements are used to heat the oven at a temperature of 180°C . The electric power dissipation (= heat flow) of $P=40\text{ W}$ is necessary. Calculate the current I needed to operate it.

The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6}\ \Omega\text{m}$. The heating element is 3 m long and has a diameter of 3.57 mm .
 Solution: $R = 1.10 \cdot 10^{-3}\ \Omega$

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40\text{ W}}{0.33\ \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \\ R &= \rho \cdot \frac{l}{\frac{1}{4} d^2 \cdot \pi} \quad \text{with } R = 1.10 \cdot 10^{-6}\ \Omega\text{m} \cdot \frac{4 \cdot 3\text{ m}}{(3.57 \cdot 10^{-3}\text{ m})^2 \cdot \pi} \end{aligned}$$

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. A resistor is specified with the factor α in its marking. This means that the resistance of the resistor changes with temperature according to the formula $R(T) = R_0(1 + \alpha(T - T_0))$. The resistor has a

Resistance of system $R = 10 \text{ k}\Omega$ at 25°C .
 Its temperature coefficients are: $\alpha = 0.01 \text{ } \frac{1}{\text{K}}$ and $\beta = 71 \cdot 10^{-6} \text{ } \frac{1}{\text{K}^2}$

Result
 The temperature inside the refrigeration system can reach down to -40°C .

... Calculation of R at -40°C .

Resistance of resistor R depends on the current and generated heat. Therefore, a solution is to heat up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$\begin{aligned} R &= R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) & | \\ \text{with } \Delta T &= T_{\text{end}} - T_{\text{start}} & | \\ R &= 10 \text{ k}\Omega \cdot \left(1 + 0.01 \frac{1}{\text{K}} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \frac{1}{\text{K}^2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right) & | \\ & & \end{aligned}$$


Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall hold: $R_1 = 200 \text{ }\Omega$, $R_2 = R_3 = 100 \text{ }\Omega$ and the voltage $U = 10 \text{ V}$.
Result R_B .

Solution

$$R_{\text{eq}} = 132.8 \text{ }\Omega$$

Now a wye-delta transformation is necessary.

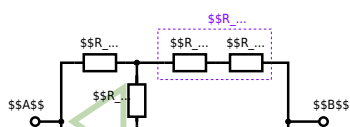


Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:
$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

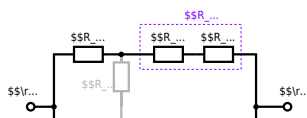


The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

**Exercise E3 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result


$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

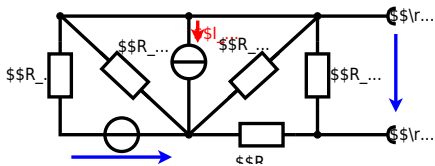


Calculate the internal resistance R_{int} and the source voltage U_{s} of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3=10 \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$. Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

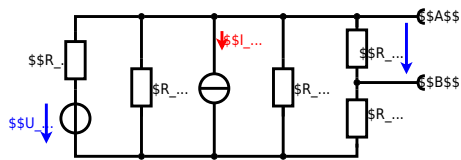

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

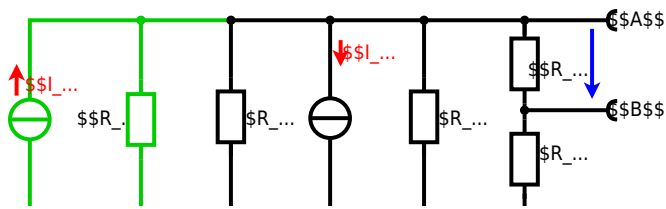

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_{24}}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot (R_6 + R_7)$$

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - (U_2 \cdot \frac{R_7}{R_1} - I_4) \cdot \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \Omega \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega}$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$


Exercise E4 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit below is a fully discharging RC circuit. The capacitor is initially uncharged. The voltage across the capacitor is again 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.


Result: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution: The ideal voltage source U is in series with R_1 and R_2 . The voltage U is independent of the capacitor.

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

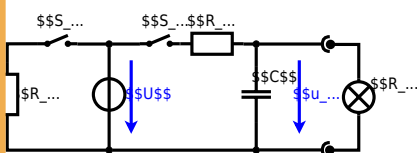


The circuit contains a voltage source $U=12\text{ V}$, a switch S_1 , a resistor of $R_1=20\text{ }\Omega$ and a capacitor of $C=100\text{ }\mu\text{F}$. The switch S_2 to an additional consumer R_2 will be considered to be open for the first task. At the moment $t_0=0\text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0)=0\text{ V}$.

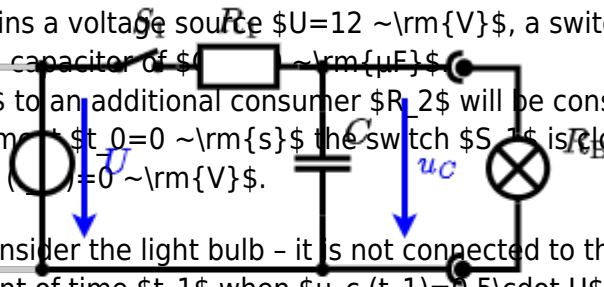

First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_c(t_1)=0.5 \cdot U$.

Solution

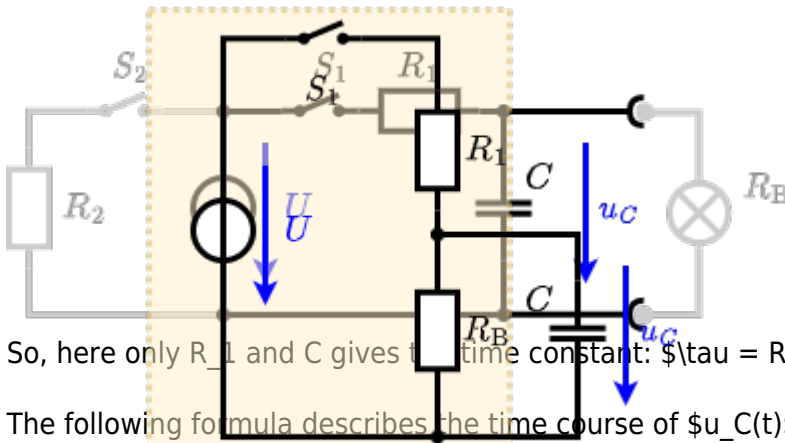

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1)=0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$

$$e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$
 An equivalent linear voltage source can be given with U_s , R_1 and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$ The internal resistance is given by substituting the ideal voltage source with its resistance ($=0\text{ }\Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10\text{ }\Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1\text{ ms}/(10\text{ }\Omega \cdot 100\text{ }\mu\text{F})})$$

Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

1. Calculate the phasor voltage $\underline{u}_C(\omega)$ of the capacitor C through the components. (R and \underline{X}_1) shall be given.

After analysis, the following phasor current \underline{i} has been extracted (in mA) in phasor notation: $\underline{i} = (2 + j4)\text{ mA} + 5j\text{ mA}$

Solution

1. Calculate the phasor voltage $\underline{u}_C(\omega)$ of the capacitor C .

```

\begin{align*} R_1 &= 1.00 \sim \Omega \\ R_2 &= 10.0 \sim \Omega \\ R_3 &= 100 \sim \Omega \\ L &= 4.7 \sim \mu\text{H} \\ C &= 40 \sim \text{nF} \end{align*}

```

The equivalent impedance for the parallel combination of R_2 and L is given by

$$Z_{\parallel} = \frac{R_2 \cdot j\omega L}{R_2 + j\omega L}$$
 where $\omega = 2\pi \cdot 450 \text{ kHz}$.

The total impedance is $Z_{\text{total}} = R_1 + Z_{\parallel} + R_3$.

The magnitude of the total impedance is $|Z_{\text{total}}| = \sqrt{R_{\text{total}}^2 + X_{\text{total}}^2}$.

The phase φ can be calculated as $\varphi = \arctan\left(\frac{X_{\text{total}}}{R_{\text{total}}}\right)$.

Exercise E6 Impedances at different Frequencies
 (written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit with a resistor R_1 and a capacitor C_1 is connected to an AC source with a voltage $U = 100 \text{ V}$ and a frequency $f = 4 \text{ MHz}$. The current I through the circuit is $I = 100 \text{ mA}$.

Result: $R_1 = 100 \text{ } \Omega$, $C_1 = 100 \text{ nF}$.

```

\begin{align*} R_1 &= 100 \sim \Omega \\ C_1 &= 100 \sim \text{nF} \end{align*}

```

A series circuit means that the current is constant on every component.

The equivalent impedance for R_1 and C_1 combined is given by

$$Z_{\text{total}} = R_1 - jX_C$$
 where $X_C = \frac{1}{\omega C}$.

The magnitude of the total impedance is $|Z_{\text{total}}| = \sqrt{R_1^2 + X_C^2}$.

The phase φ is $\varphi = \arctan\left(\frac{-X_C}{R_1}\right)$.

The current I is given by $I = \frac{U}{|Z_{\text{total}}|}$.

Exercise E7 Complex Impedance Circuit
(written test, approx. 15 % of a 60-minute written test, WS2022)

1. Calculate the circuit impedance Z and the effective value $|Z|$ and P in the circuit. The voltage source $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$ V is connected with an inductor of $330 \mu\text{H}$ and a capacitor of $0.22 \mu\text{F}$, all in series.

Result

$$Z = 197.3 \text{ } \Omega \quad |Z| = 48.2 \text{ } \Omega \quad Z_C = 19.8 \text{ } \Omega$$

Draw the circuit diagram of the given circuit and label all components, voltages, and currents.

$$Z = \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \quad Z_C = \frac{1}{2\pi \cdot f \cdot C} = \frac{1}{2\pi \cdot 15 \text{ kHz} \cdot 0.22 \mu\text{F}}$$


Result

$$\hat{I} = \frac{\hat{U}}{Z} = \frac{3 \text{ V}}{197.3 \text{ } \Omega} = 15.2 \text{ mA} \quad P = \hat{I}^2 \cdot R = (15.2 \text{ mA})^2 \cdot 330 \mu\text{H}$$

$$Z = \frac{19.8 \text{ } \Omega - j 19.8 \text{ } \Omega + j 330 \mu\text{H}}{19.8 \text{ } \Omega} \quad |Z| = \sqrt{R^2 + (Z_L - Z_C)^2} = 197.3 \text{ } \Omega$$

$$\underline{Z} = R + j(Z_L - Z_C) = R + j \cdot (Z_L - Z_C) \quad |Z| = \sqrt{R^2 + (Z_L - Z_C)^2}$$



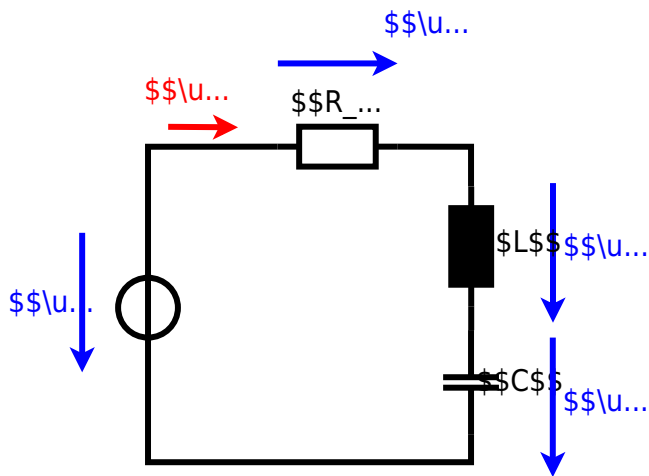

From:

<https://mexle.te.hs-heilbronn.de/> - **MEXLE Wiki**

Permanent link:

https://mexle.te.hs-heilbronn.de/electrical_engineering_and_electronics_1/ws2022_exam?rev=1768171359

Last update: **2026/01/11 23:42**

