

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

- Exam Winter Semester 2022** 2
- Additional permitted Aids 2
- Hits 2
- Tasks 2
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 2
- Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 3
- Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 3
- Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 5
- Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) 9
- Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 11
- Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 11
- Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 12

Exam Winter Semester 2022

Additional permitted Aids

- non-programmable calculator,
- formulary (2 DIN A4 pages)

Hits

- The duration of the exam is 60 min.
- Attempts to cheat will lead to exclusion and failure of the exam.
- Withdrawal is no longer possible after these exam has been handed out.
- Please write down intermediate calculations and results on the assignment sheet. (when more space is needed also on the reverse side. In this case: Mark it clearly).
- Always use units in the calculation.
- Use a document-proof, non-red pen.

Tasks

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

A heating element made of a nichrome wire with a cross-section of 1.80 mm^2 is connected to a 230 V AC power supply. The electric power dissipation (= heat flow) of $P=40 \text{ W}$ is necessary.

Calculate the current I needed to operate it.

The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \text{ } \Omega \text{ m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

Calculate the resistance R of the heating element.

Result: $I = 0.33 \text{ A}$, $R = 110.3 \text{ } \Omega$

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} \\ I &= \sqrt{\frac{40 \text{ W}}{110.3 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \\ R &= \rho \cdot \frac{l}{\frac{1}{4} d^2 \cdot \pi} \\ R &= 1.10 \cdot 10^{-6} \text{ } \Omega \text{ m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

2025/11/22 19:25

[resistivity, power, exam ee1 ws2022](#)

Exercise E2 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator, which has a temperature coefficient of resistance α and a temperature coefficient of resistance β has a resistance of R_0 at T_0 . Calculate the resistance of the thermistor at T_1 .
 Result: $R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$ at $T_1 = 25^\circ\text{C}$ your answer.

Its temperature coefficients are: $\alpha = 0.01 \cdot 10^{-6} \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$

Result: The temperature inside the refrigeration system can reach down to -40°C .

Calculate the resistance of the thermistor at -40°C .

The resistance transfer characteristic of the circuit and of the heat flow. Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad | \quad \Delta T = T_{\text{end}} - T_{\text{start}}$$

$$R = 10 \cdot \Omega \cdot \left(1 + 0.01 \cdot 10^{-6} \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2 \right)$$

2025/11/22 19:25

[temperature dependent resistance, power, heat, exam ee1 ws2022](#)


Exercise E3 Pure Resistor Network Simplification
(written test, approx. 13 % of a 60-minute written test, WS2022)

The following circuit is given with $R_1 = 20 \Omega$, $R_2 = 10 \Omega$, $R_3 = 10 \Omega$, $R_4 = 10 \Omega$ and the voltage $U = 10 \text{ V}$. Calculate the current I through the resistor R_3 .

Result: $I = 0.5 \text{ A}$

Solution: $R_{\text{eq}} = 13.3 \Omega$

Now a wye-delta transformation is necessary.

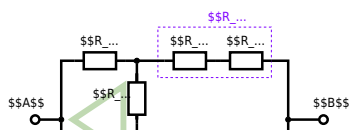


Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:
$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

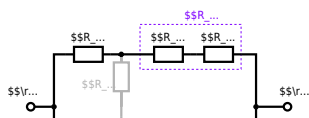

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$


2025/11/22 19:25

[network simplification, exam ee1 ws2022](#)

**Exercise E3 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result


$$U_s = U_{AB} = 4.5 \text{ V} \quad R_i = R_{AB} = 6 \Omega$$

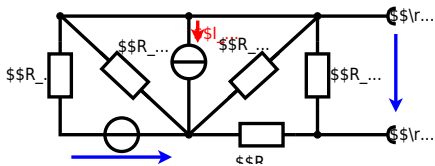


Calculate the internal resistance R_{in} and the source voltage U_{s} of an equivalent linear voltage source on the connectors A and B .
 $R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \Omega$, $I_4=4.2 \text{ A}$,
 $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

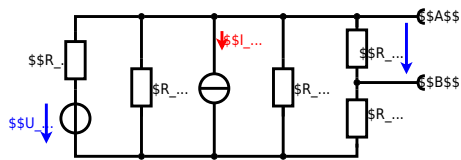

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

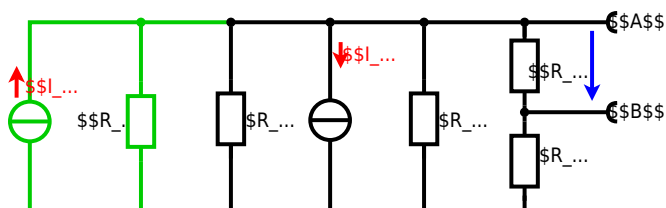

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_{24}}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24}$$

$$U_{24} = R_{135} \cdot I_{24} \quad \&= \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left\{ \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \right\} \quad \&= \left(\frac{U_2}{R_1} - I_4 \right) \cdot \left\{ \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \right\}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$:

$$U_{AB} = \left(\frac{6.0\text{V}}{5.0\Omega} - 4.2\text{A} \right) \cdot \left\{ \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \right\} \quad R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

2025/11/22 19:25

dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022

Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)



The circuit (with the ideal battery) also consists of $R_1 = 6\Omega$, $R_2 = 20\Omega$ and a capacitor $C = 2\mu\text{F}$ as indicated in the figure. The switch S_1 is open. The voltage across the capacitor is again 0V at the moment $t_0 = 0\text{s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1\text{ms}$ after closing the switch.

Result: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

$$U_{\Delta} = \frac{U \cdot R_2}{R_1 + R_2} = \frac{12\text{V} \cdot 20\Omega}{6\Omega + 20\Omega} = 4.76\text{V}$$

Solution: The internal resistance R_i is given by substituting the ideal voltage source with a short-circuit. The voltage U_{Δ} is independent of this choice.

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

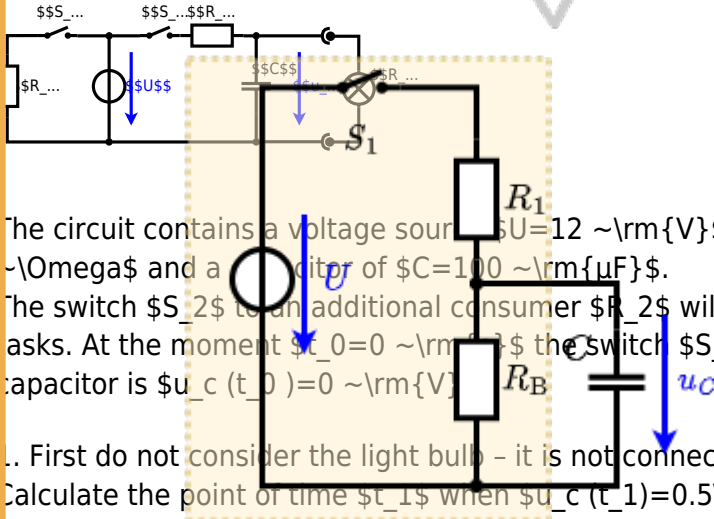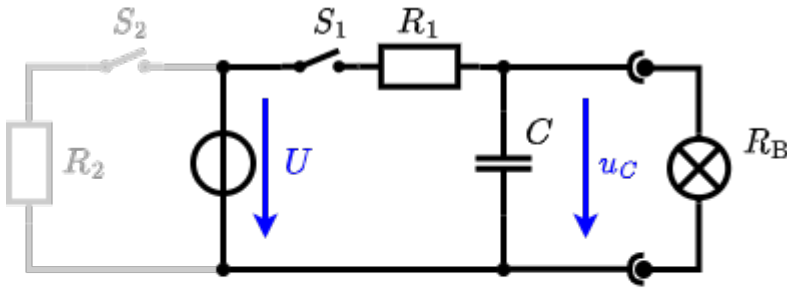


The circuit contains a voltage source $U=12 \text{ V}$, a switch S_1 , a resistor of $R_1=20 \text{ }\Omega$ and a capacitor of $C=100 \text{ }\mu\text{F}$. The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0=0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0)=0 \text{ V}$. First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_c(t_1)=0.5 \cdot U$.

An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($R=0 \text{ }\Omega$, short-circuit). $R_i = R_1 \parallel R_B = 10 \text{ }\Omega$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ ms}/(10 \text{ }\Omega \cdot 100 \text{ }\mu\text{F})})$$

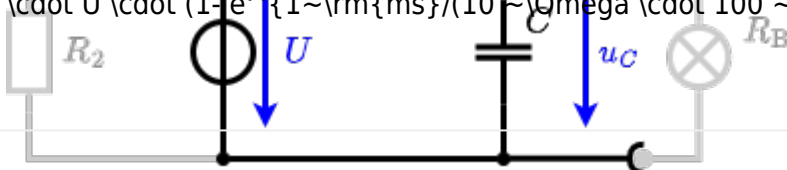

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_c(t_1)=0.5 \cdot U$: $u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$. It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$

charging capacitors, dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022

Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. A circuit has the nodes and impedances shown in the figure. The voltage U is applied through the terminals R and X_1 shall be given.

After analysis, the full bidimensional complex impedance values extracted and digitized in handwritten LaTeX: $Z = \frac{1}{j\omega C} + R + j\omega L + \dots$

.. Calculation of physical values of the components.
Solution: $R = 10 \Omega, L = 0.07 \text{ mH}, C = 20 \text{ nF}$

Solution
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \text{with } \underline{Z} = 0.24 \frac{1}{j\omega C} + R + j\omega L$$

The voltage U is applied through the terminals R and X_1 .
resulting impedance $Z = 0.24 \frac{1}{j\omega C} + R + j\omega L$
Therefore, the component values are $R = 10 \Omega, L = 0.07 \text{ mH}, C = 20 \text{ nF}$
Impedance $Z = \frac{1}{j\omega C} + R + j\omega L = \frac{1}{j\omega C} + R + j\omega L$
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{U}{\frac{1}{j\omega C} + R + j\omega L}$$

The phase φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(Z)}{\text{Re}(Z)}\right)$

2025/11/22 19:25
complex impedance, exam ee1 ws2022

Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)

2. A circuit has the resistors and impedances shown in the figure. The voltage U is applied through the terminals R and X_1 shall have the same absolute value of the impedance as a capacitor $C_1 = 40 \text{ nF}$ at $f_1 = 4 \text{ MHz}$.

Solution
Solution: $R_1 = 1.00 \Omega, R_2 = 10.0 \Omega$

A series circuit means that the current is constant on every component.
 The equivalent resistance has the value $R_{eq} = R_1 + R_2 + R_3$ (It has to, since R_3 is perpendicular to X_{L2})
 Therefore the resulting current of the parallel circuit is given as:

$$I = \frac{U}{R_{eq}} = \frac{U}{R_1 + R_2 + R_3}$$
 This can be rearranged to get $R_{eq} = \frac{U}{I}$
 Back to the first formula $R_3 = \frac{U}{I} - R_1 - R_2$

$$R_3 = \frac{U}{I} - R_1 - R_2$$

2025/11/22 19:25
[complex impedance, exam ee1 ws2022](#)

Exercise E7 Complex Impedance Circuit
(written test, approx. 15 % of a 60-minute written test, WS2022)

1. Calculate the current I in the circuit shown in Fig. 1. The AC source is $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$ V. The circuit consists of a resistor of 10Ω , an inductor of $330 \mu\text{H}$ and a capacitor of $0.22 \mu\text{F}$, all in series.

Solution
 Result $I = 107.31 \text{ mA}$
 Draw the circuit diagram of the given circuit and label all components, voltages, and currents.


$$Z = \frac{U}{I} \implies I = \frac{U}{Z}$$

$$Z_C = \frac{1}{2\pi \cdot f \cdot C} = \frac{1}{2\pi \cdot 15 \text{ kHz} \cdot 0.22 \mu\text{F}}$$

$$Z_L = 2\pi \cdot f \cdot L = 2\pi \cdot 15 \text{ kHz} \cdot 330 \mu\text{H}$$

$$\underline{Z} = R + \underline{Z}_L + \underline{Z}_C = R + j \cdot \underline{Z}_L - j \cdot \underline{Z}_C$$

$$|\underline{Z}| = \sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2}$$

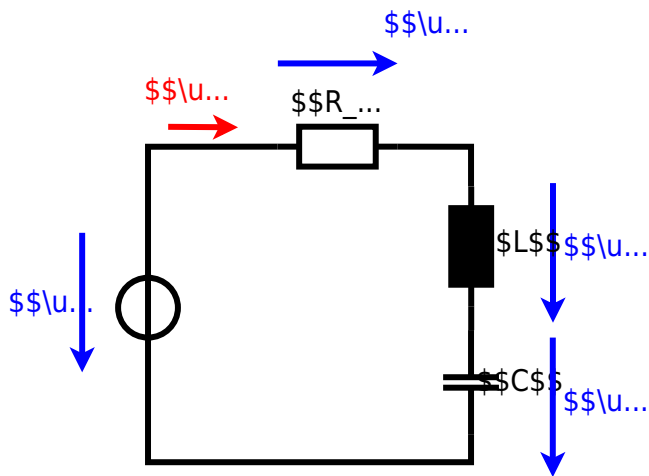

2025/11/22 19:25

complex impedance, exam ee1 ws2022

From:

<https://mexle.te.hs-heilbronn.de/> - **MEXLE Wiki**

Permanent link:

https://mexle.te.hs-heilbronn.de/electrical_engineering_and_electronics_1/ws2022_exam?rev=1768172541

Last update: **2026/01/12 00:02**

