

# task\_kricv9fh7haauo6q\_with\_calculation

## Student Group

First Name	Surname	Matrikel Nr.

## Table of Contents

Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) .....	2
--	---

complex impedance, exam ee1 WS2022

Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

1. Calculate the circuit impedance  $Z$  for the circuit shown in the figure. The voltage source  $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$  V is connected with an inductor of  $330 \mu\text{H}$  and a capacitor of  $0.22 \mu\text{F}$ , all in series.

Solution:  $Z = 19.8 \Omega$

Draw the circuit diagram of the given circuit and label all components, voltages, and currents.

$$Z = \frac{U}{I} = \frac{3.0 \text{ V}}{0.15 \text{ A}} = 20 \Omega$$


$$Z_C = \frac{1}{2\pi \cdot f \cdot C} = \frac{1}{2\pi \cdot 15 \text{ kHz} \cdot 0.22 \mu\text{F}} = 1.92 \text{ } \Omega$$

$$Z_L = \sqrt{2} \cdot \omega \cdot L = 2 \cdot \pi \cdot 15 \text{ kHz} \cdot 0.22 \mu\text{F} = 2.07 \text{ } \Omega$$

$$Z = \frac{U}{I} = \frac{3.0 \text{ V}}{0.15 \text{ A}} = 20 \Omega$$

$$\underline{Z} = R + \underline{Z}_L + \underline{Z}_C = R + j \cdot \omega L - j \cdot \frac{1}{\omega C} = R + j \cdot (Z_L - Z_C) = \sqrt{R^2 + (Z_L - Z_C)^2}$$



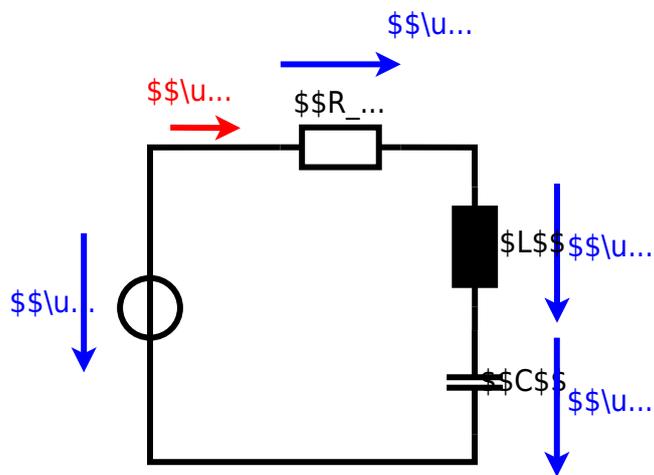

From:  
<https://mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link:  
[https://mexle.te.hs-heilbronn.de/electrical\\_engineering\\_and\\_electronics/task\\_kricv9fh7haauo6q\\_with\\_calculation](https://mexle.te.hs-heilbronn.de/electrical_engineering_and_electronics/task_kricv9fh7haauo6q_with_calculation)

Last update: **2023/04/02 00:27**

